https://truckmanualshub.com/

KOBELCO

HYDRAULIC CRAWLER CRANE

CKE1350

Model: CKE1350-1F

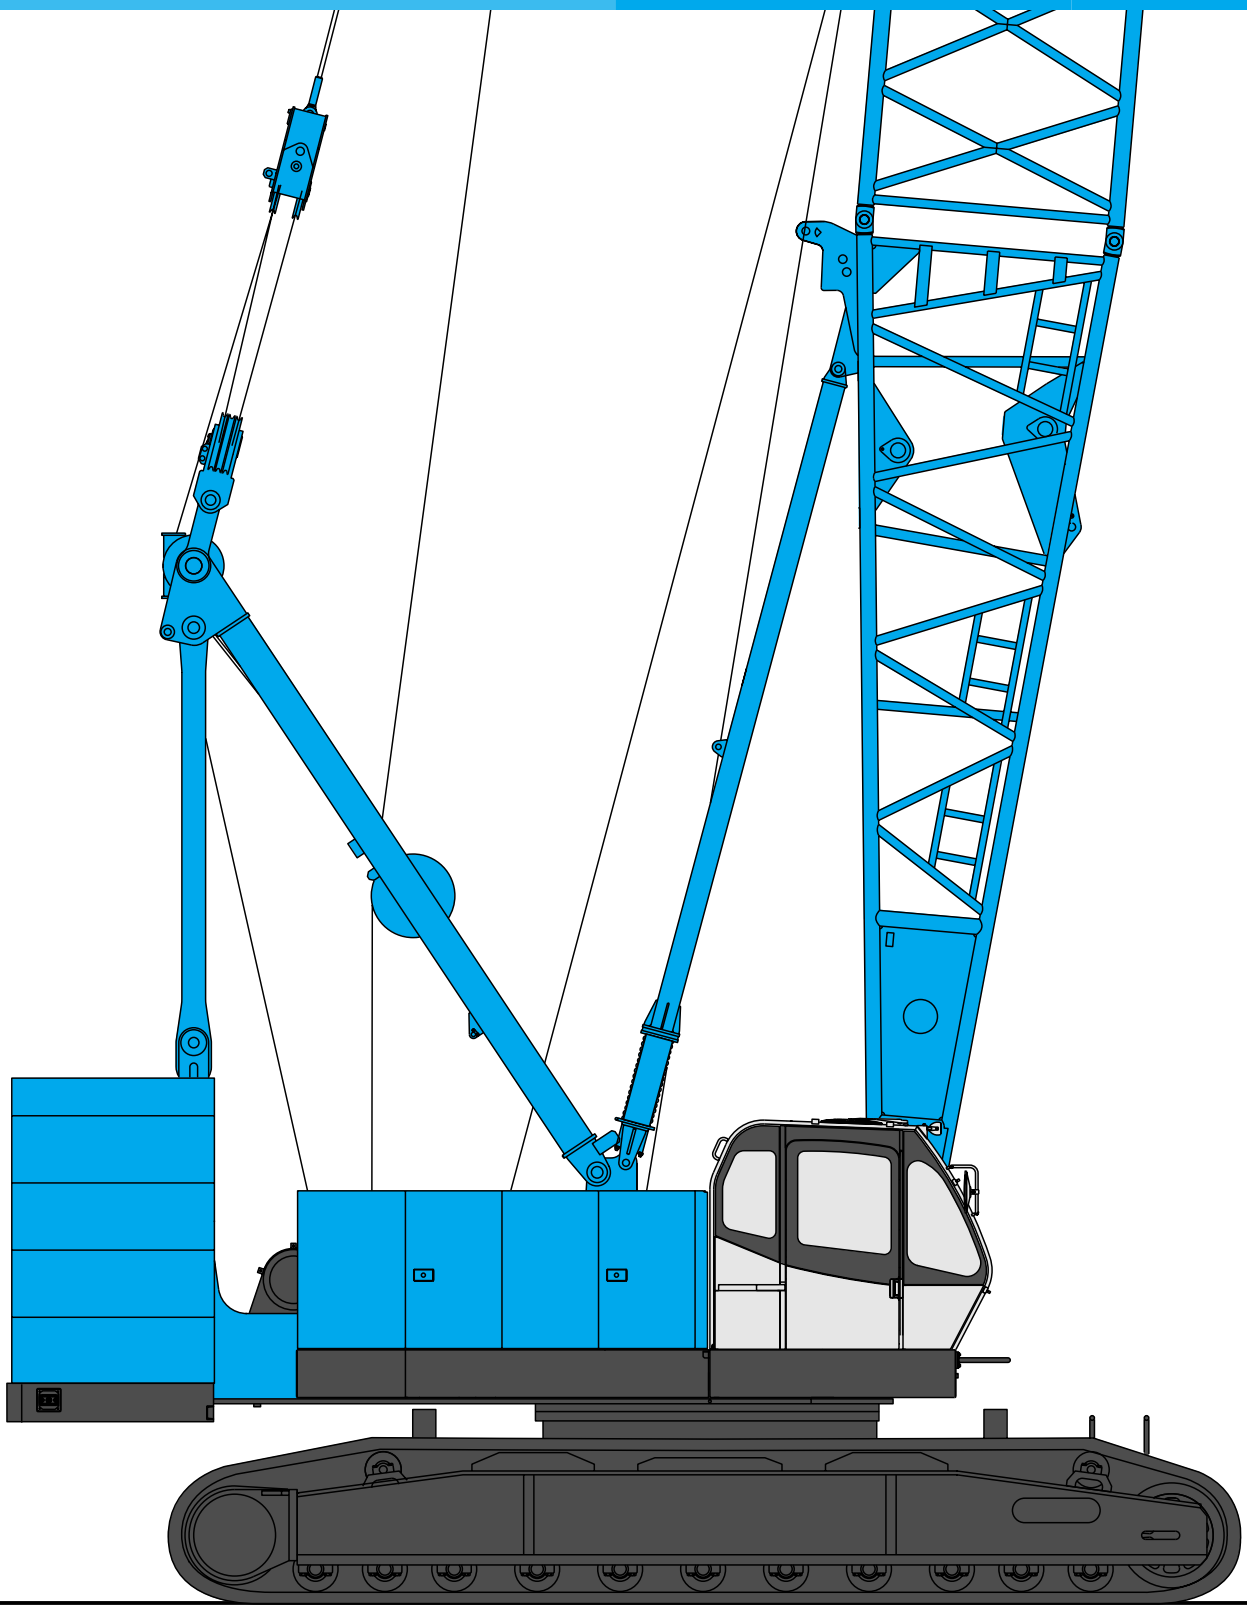

Max. Lifting Capacity: 135 t x 4.5 m
Max. Crane Boom Length: 76.2 m
Max. Long Boom Length: 82.3 m
Max. Fixed Jib Combination: 61.0 m + 30.5 m
Max. Luffing Jib Combination: 47.9 + 32.0 m, 44.8 + 53.3 m

https://truckmanualshub.com/

CONFIGURATION

Crane Boom

Max. Lifting Capacity:
135 metric ton x 4.5 m
Max. Boom Length:
76.2 m

Long Boom

Max. Lifting Capacity:
44.3 metric ton x 10.6 m
Max. Boom Length:
82.3 m

Luffing Boom

Max. Lifting Capacity:
80 metric ton x 8.0 m
Max. Boom Length:
47.9 m

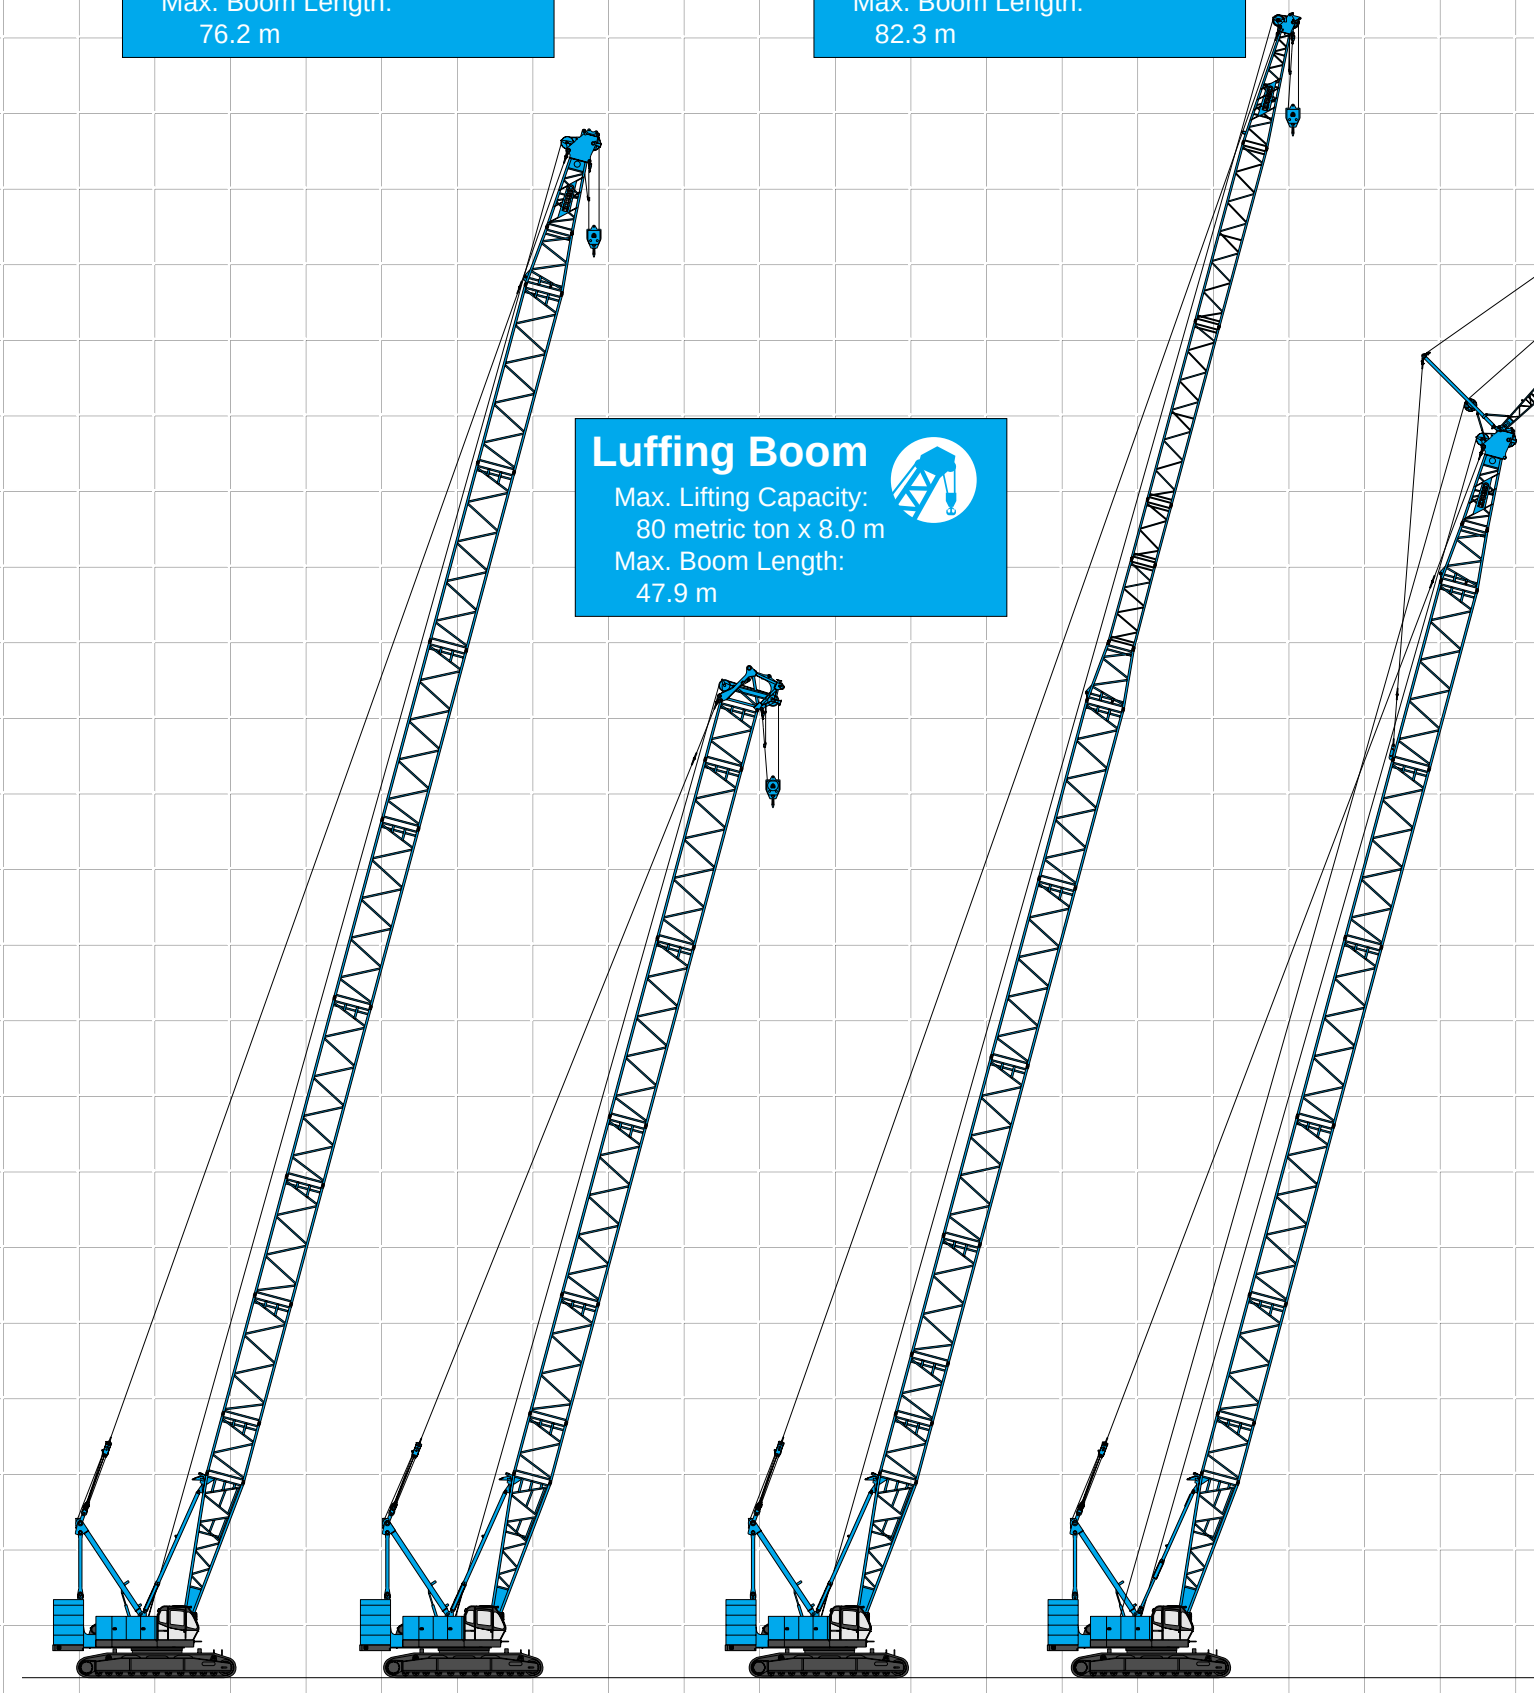

https://truckmanualshub.com/

HYDRAULIC CRAWLER CRANE CKE1350

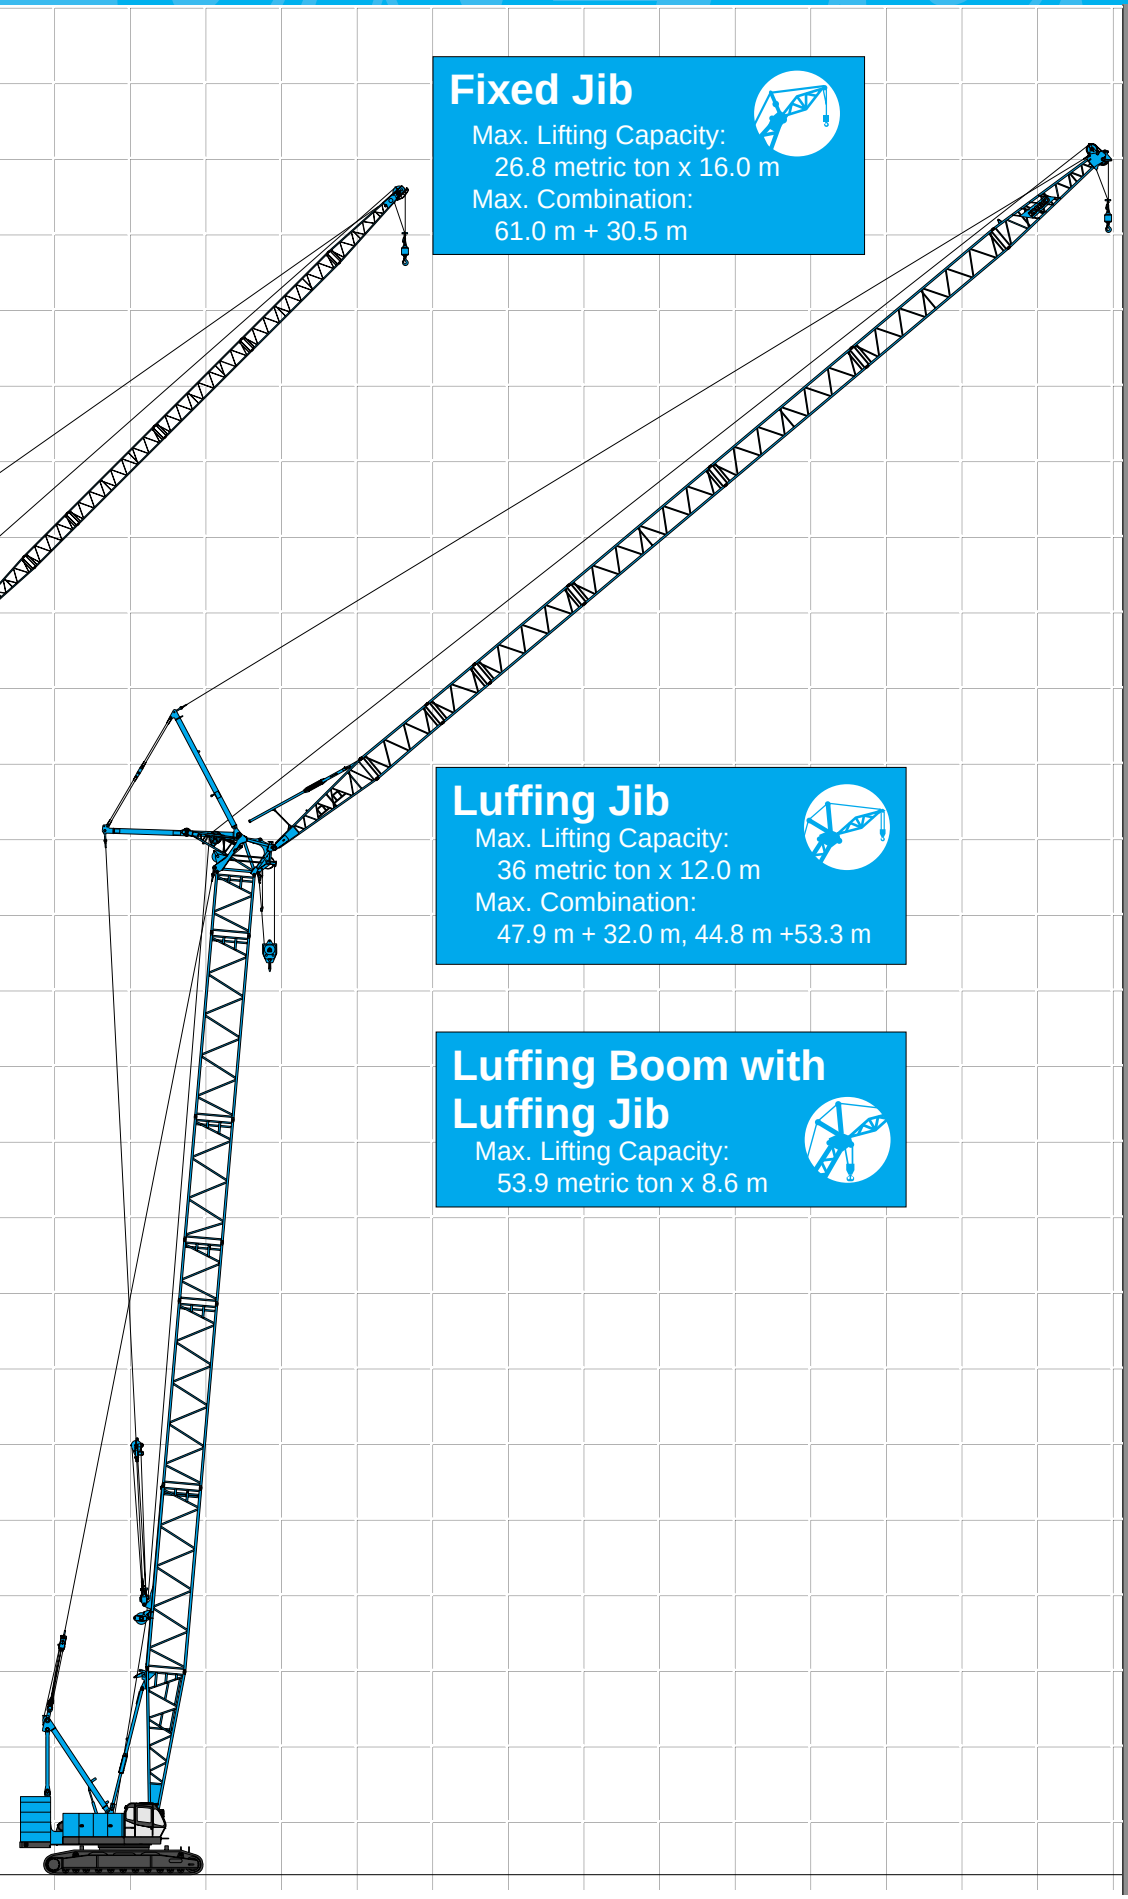

Fixed Jib

Max. Lifting Capacity:
26.8 metric ton x 16.0 m
Max. Combination:
61.0 m + 30.5 m

Luffing Jib

Max. Lifting Capacity:
36 metric ton x 12.0 m
Max. Combination:
47.9 m + 32.0 m, 44.8 m +53.3 m

Luffing Boom with Luffing Jib

Max. Lifting Capacity:
53.9 metric ton x 8.6 m

CONTENTS

Configuration ····· 1
Specifications ····· 3
General Dimensions ····· 5

Boom and Jib Arrangements

Crane Boom Arrangements ····· 7
Long Boom Arrangements ····· 8
Fixed Jib Arrangements ····· 8
Luffing Boom Arrangements for Luffing ····· 9
Luffing Boom Arrangements for Crane ····· 9
Luffing Jib Arrangements ····· 10

Working Ranges and Lifting Capacities

Crane Boom Working Ranges ····· 12
Crane Boom Lifting Capacity ····· 13
Auxiliary Sheave Lifting Capacity for Crane Boom ····· 14
Luffing Boom Lifting Capacity ····· 15
Auxiliary Sheave Lifting Capacity for Luffing Boom ····· 15
Long Boom Working Ranges ····· 16
Long Boom Lifting Capacity ····· 17
Auxiliary Sheave Lifting Capacity for Long Boom ····· 17
Fixed Jib Working Ranges ····· 18
Fixed Jib Lifting Capacities ····· 19
Luffing Jib Working Ranges ····· 21
Luffing Jib Lifting Capacities ····· 23
Luffing Boom Lifting Capacities with Luffing Jib ····· 27

Transportation Plan ····· 28
Parts and Attachments ····· 29

https://truckmanualshub.com/

SPECIFICATIONS

Power Plant

Model: Hino diesel engine P11C-UN
Type: Water-cooled, direct fuel injection, with turbocharger Compiles with NRMM (Europe) Stage IIIA and US EPA Tier III.
Displacement: 10.520 liters
Rated Power:247 kW/2,000 min^{-1} {rpm} (ISO)
Max. torque: 1,300 N·m/1,500 min^{-1}
Cooling system: Liquid, recirculating bypass
Starter: 24 V/6.0 kW
Radiator: Corrugated type core, thermostatically controlled
Air cleaner: Dry type with replaceable paper element
Throttle: Electric throttle control, twist grip type
Fuel filter: Replaceable paper element
Batteries: Two 12V, 170Ah/20HR capacity batteries, parallel connected.
Fuel tank capacity: 400 liters

Hydraulic System

Four variable displacement piston pumps are driven by heavy-duty pump drive. Two of variable displacement pumps are used in the main hook hoist circuit, auxiliary hook hoist circuit, and each propel circuit. One of the other two pumps is used in the boom hoist circuit and third hoist circuit. The other is used in the swing circuit.
Control: Full-flow hydraulic control system for infinitely variable pressure to front and rear drums, boom hoist brakes and clutches. Controls respond instantly to the touch, delivering smooth function operation.
Cooling: Oil-to-air heat exchanger (plate-fin type)
Filtration: Full-flow and bypass type with replaceable element
Electrical system: All wiring corded for easy servicing, individual fused branch circuits.

Max. relief valve pressure:
Load hoist, boom hoist and propel system:
31.9 MPa {325 kgf/cm^2}
Swing system: 27.5 MPa {280 kgf/cm^2}
Control system: 7.0 MPa {71 kgf/cm^2}
Reservoir capacity: 535 liters

Boom Hoisting System

Powered by a hydraulic motor through a planetary reducer.
Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.
Drum lock: External ratchet for locking drum.
Drum: Single drum, grooved for 20 mm dia. wire rope.
Line speed: Single line on first drum layer
Hoisting/Lowering: 48 to 2 m/min

Diameter of wire ropes
Boom guy line: 30 mm
Boom hoist reeving: 12 parts of 20 mm dia. high strength wire rope
Boom backstops: Telescopic type with spring bumper
Required for all boom lengths

Load Hoist System

Front and rear drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers.
Negative Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through a counter-balance valve. (Positive free fall brake is optional item.)
Drum lock: External ratchet for locking drum
Drums:
Front drum:
666 mm P.C.D. x 672 mm Lg. wide drum, grooved for 26 mm wire rope. Rope capacity is 275 m working length and 350 m storage length.
Rear drum:
666 mm P.C.D. x 672 mm Lg. wide drum, grooved for 26 mm wire rope. Rope capacity is 255 m working length and 350 m storage length.
Note: Rope lengths listed above denote drum capacity and may differ from actual rope lengths supplied when machinery is shipped.
Line speed: Single line on the first drum layer
Hoisting/Lowering: 120 to 3 m/min
Line Pull:
Rated line pull (Single-line): 132 kN {13.5 tf}

Swing System

Swing unit is powered by hydraulic motor driving spur gear through planetary reducer, the swing system provides 360° rotation.
Swing parking brakes : A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.
Swing circle: Single-row ball bearing with an integral internally cut swing gear.
Swing lock: Manually, four position lock for transportation
Swing speed: 2.1 min^{-1} {rpm}

Upper Structure

Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine with low noise level. Complies with EC Directive 2000/14/EC.
Counterweight: 53.0 ton
Note: Lifting capacity setting with 48.0 ton counterweight (without carbody weight) avaliable as option.

https://truckmanualshub.com/

Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, high backed seat with a head-rest and armrests, and intermittent wiper and window washer (roof and front window).

Cab fittings:
Air conditioner, convenient compartment (for tool), cup holder, ashtray, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, foot-rest, shoe tray

Controls:
Four adjustable levers for front drum, rear drum, boom drum and swing controls, and boom hoist pedal.

Lower Structure

Steel-welded carbody with axles. Crawler assemblies are designed with quick disconnect feature for individual removal as a unit from axles. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.

Carbody weight: 10.0 ton

Crawler drive: Independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

Crawler brakes: Spring-set, hydraulically released parking brakes are built into each propel drive.

Steering mechanism: A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

Track rollers: Sealed track rollers for maintenance-free operation.

Shoes (flat): 60 shoes, 910 mm wide each crawler
(Optional 1,220 mm shoe is available)

Max. travel speed: 1.3/0.9 km/h

Max. gradeability: 30%

Weight

Including upper and lower machine, 53.0 ton counterweight and 10.0 ton carbody weight, 15.2 m basic boom (or 32.7 m basic luffing boom + 22.9 m basic luffing jib), hook and other accessories.

Specification	Weight	Ground pressure
Crane boom	Approx. 136 ton,	106 kPa {1.08 kgf/cm²}
Luffing jib	Approx. 149 ton,	116 kPa {1.18 kgf/cm²}

Attachment

Boom and Jib:
Welded lattice construction using tubular, high-tensile steel chords with pin connections between sections.

Boom and Jib Length

	Min. Length (Min. Combination)	Max. Length (Max. Combination)
Crane Boom	15.2 m	76.2 m
Luffing Boom	14.4 m	47.9 m
Long Boom	51.8 m	82.3 m
Fixed Jib	24.4 m + 12.2 m	61.0 m + 30.5 m
Luffing Jib	32.7 m + 22.9 m	47.9 m + 32.0 m/ 44.8 m + 53.3 m

Main Specifications (Model: CKE1350-1F)

Crane Boom	
Max. Lifting Capacity	135 t/4.5 m
Max. Length	76.2 m
Luffing Boom	
Max. Lifting Capacity	80 t/8.0 m
Max. Length	47.9 m
Long Boom	
Max. Lifting Capacity	44.3 t/10.6 m
Max. Length	82.3 m
Fixed Jib	
Max. Lifting Capacity	26.8 t/16.0 m
Max. Length	30.5 m
Max. Combination	61.0 m + 30.5 m
Luffing Jib	
Max. Lifting Capacity	36 t/12.0 m
Max. Combination	47.9 m + 32.0 m, 44.8 m + 53.3 m
Main & Aux. Winch	
Max. Line Speed	120 m/min (1st layer)
Rated Line Pull (Single Line)	132 kN {13.5 tf}
Wire Rope Diameter	26 mm
Wire Rope Length	275 m (Main) 255 m (Aux.)
Brake Type	Spring-set hydraulically released (Nagative)
Free-Fall Brake Type	Wet-type multiple disc brake (Optional)

Working Speed	
Swing Speed	2.1 min^{-1} {rpm}
Travel Speed	1.3/0.9 km/h
Power Plant	
Model	Hino P11C-UN
Engine Output	247 kW/2,000 min^{-1} {rpm}
Fuel Tank Capacity	400 liters
Hydraulic System	
Main Pumps	4 variable displacement
Max. Pressure	31.9 MPa {325 kgf/cm²}
Hydraulic Tank Capacity	535 liters
Self-Removal Device	Standard counterweight removal
Weight	
Operating Weight*	Approx. 136 t
Ground Pressure*	106 kPa {1.08 kgf/cm²}
Counterweight	53.0 t (Upper), 10.0 t (Lower)
Transport Weight**	Approx. 39.7 t

* Including upper and lower machine, 53.0 ton counterweight and 10.0 ton carbody weight, basic boom, hook, and other accessories.
** Base machine with trans-lifter, 70 t hook, main and aux. winches (non-free fall) including wire rope, self removal device.
Units are SI units. { } indicates conventional units.

https://truckmanualshub.com/

GENERAL DIMENSIONS

Crane Boom

(Unit: mm)

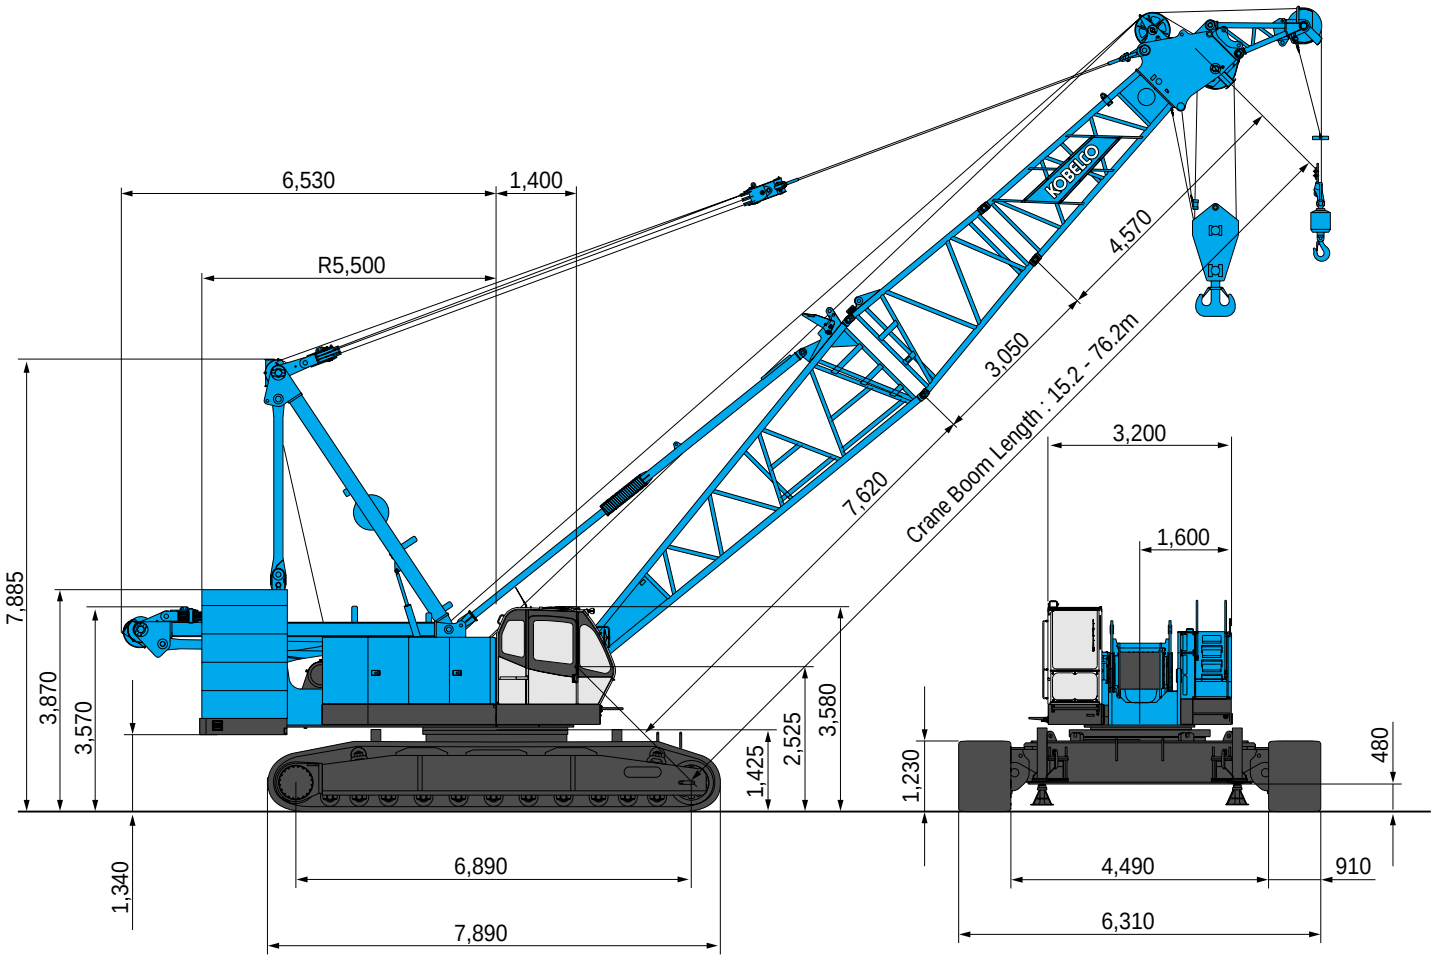

Limit of Hook Lifting

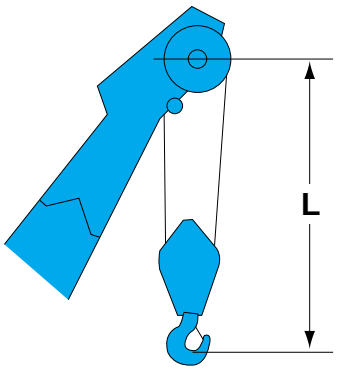

Hook	L
135 t hook	4.7 m
70 t hook	4.5 m
35 t hook	4.3 m

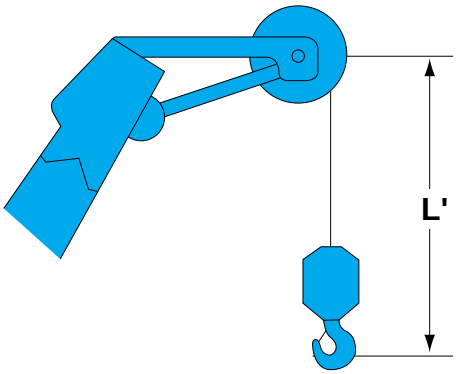

Hook	L'
13.5 t ball hook	3.7 m
13.5 t swivel hook	3.4 m

https://truckmanualshub.com/

Luffing Jib

(Unit: mm)

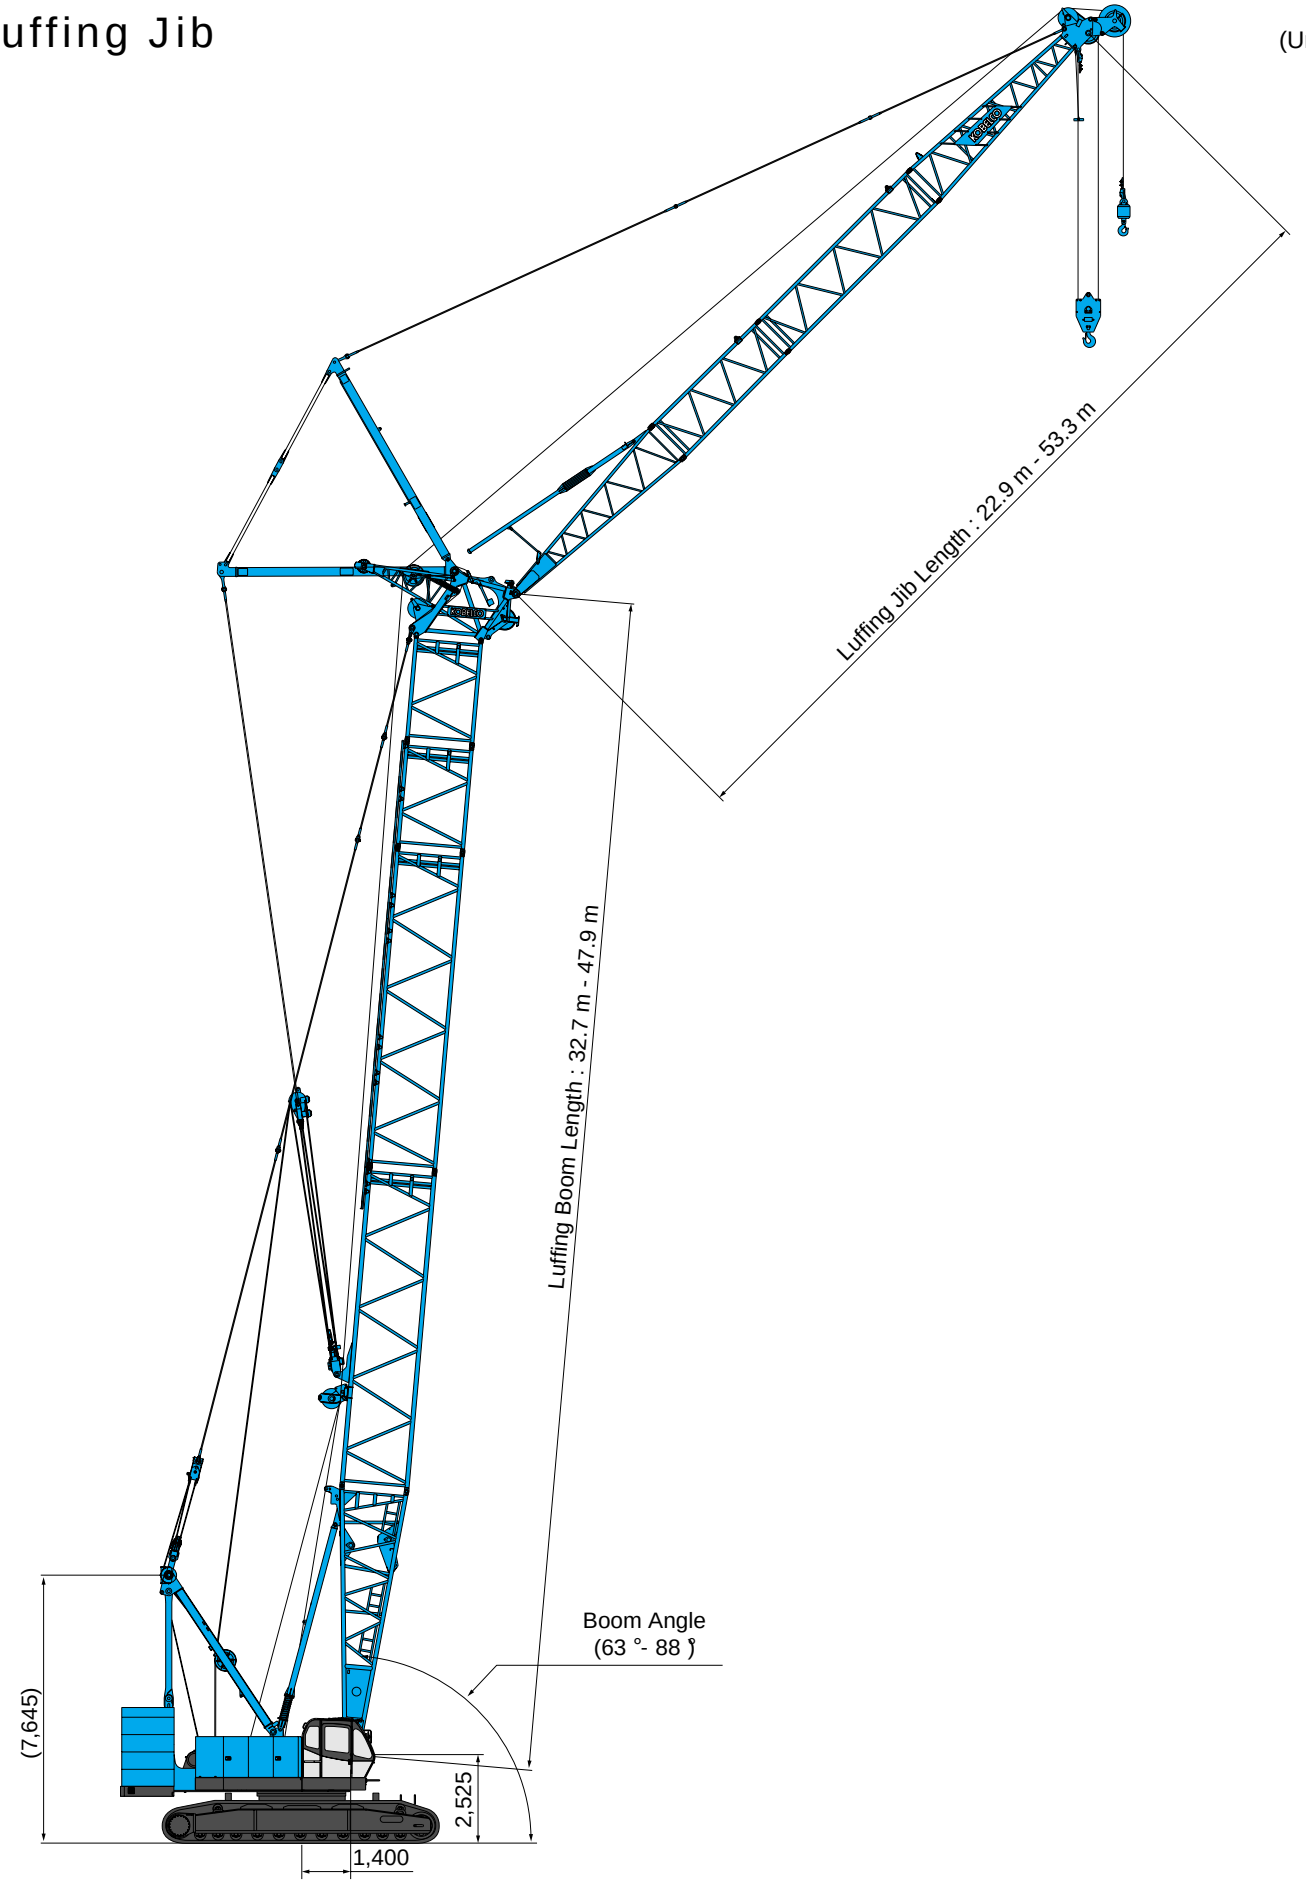

https://truckmanualshub.com/

BOOM AND JIB ARRANGEMENTS

Crane Boom Arrangements

Boom length m (ft)	Boom arrangement
15.2 (50)	B 10T T
18.3 (60)	※ B 10 10T T
21.3 (70)	※ B 10 10 10T T B 20 10T T
24.4 (80)	※ B 10 20 10T T B 30 10T T
27.4 (90)	※ B 10 10 20 10T T B 10 30 10T T B 20 20 10T T
30.5 (100)	※ B 10 20 20 10T T B 20 30 10T T B 10 10 30 10T T
33.5 (110)	※ B 10 20 30 10T T B 30 30 10T T
36.6 (120)	※ B 10 10 20 30 10T T B 20 20 30 10T T B 10 30 30 10T T
39.6 (130)	※ B 10 20 20 30 10T T B 20 30 30 10T T B 10 10 30 30 10T T
42.7 (140)	※ B 10 20 30 30 10T T B 30 30 30 10T T
45.7 (150)	※ B 10 10 20 30 30 10T T B 20 20 30 30 10T T B 10 30 30 30 10T T

Boom length m (ft)	Boom arrangement
48.8 (160)	※ B 10 20 20 30 30 10T T B 20 30 30 30 10T T B 10 10 30 30 30 10T T
51.8 (170)	※ B 10 20 30 30 30 10T T B 30 30 30 30 10T T
54.9 (180)	※ B 10 10 20 30 30 30 10T T B 10 30 30 30 30 10T T B 20 20 30 30 30 10T T
57.9 (190)	※ B 10 20 20 30 30 30 10T T B 10 10 30 30 30 30 10T T B 20 30 30 30 30 10T T
61.0 (200)	※ B 10 20 30 30 30 30 10T T B 30 30 30 30 30 10T T
64.0 (210)	※ B 10 10 20 30 30 30 30 10T T B 20 20 30 30 30 30 10T T B 10 30 30 30 30 30 10T T
67.1 (220)	※ B 10 20 20 30 30 30 30 10T T B 20 30 30 30 30 30 10T T B 10 10 30 30 30 30 30 10T T
70.1 (230)	※ B 10 20 30 30 30 30 30 10T T
73.2 (240)	※ B 10 10 20 30 30 30 30 30 10T T B 20 20 30 30 30 30 30 10T T
76.2 (250)	※ B 10 20 20 30 30 30 30 30 10T T

Symbol	Boom Length	Remarks
B	7.6 m	Boom Base
T	4.6 m	Boom Top
10T	3.0 m	Tapered Boom
10	3.0 m	Insert Boom
20	6.1 m	Insert Boom
30	9.1 m	Insert Boom

↗ mark shows the guy line installing position when the fixed jib is used.

※ Indicates the most flexible combination of insert booms, which can be modified to form all shorter boom arrangements.

https://truckmanualshub.com/

Long Boom Arrangements

Boom length m (ft)	Boom arrangement
51.8 (170)	B 30A 30 10 30 10T 14A JT
54.9 (180)	B 30A 30 20 30 10T 14A JT
57.9 (190)	B 30A 30 20 30 10 10T 14A JT
61.0 (200)	B 30A 30 10 20 30 10 10T 14A JT
64.0 (210)	B 30A 30 10 20 30 10 10T 14A 10 JT
67.1 (220)	B 30A 30 10 20 30 10 10T 14A 20 JT
70.1 (230)	B 30A 30 10 20 30 10 10T 14A 10 20 JT
73.2 (240)	B 30A 30 10 20 30 10 10T 14A 20 20 JT
76.2 (250)	B 30A 30 10 20 30 10 10T 14A 20 30 JT
79.2 (260)	B 30A 30 10 20 30 10 10T 14A 10 20 30 JT
82.3 (270)	B 30A 30 10 20 30 10 10T 14A 10 30 30 JT

Symbol	Long Boom Length	Remarks
B	7.6 m	Boom Base
JT	6.4 m	Luffing Jib Top
10T	3.0 m	Tapered Boom
10	3.0 m	Insert Boom
20	6.1 m	Insert Boom
30	9.1 m	Insert Boom
30A	9.1 m	Special Insert Boom for Luffing
14A	4.3 m	Relay Jib
10	3.0 m	Luffing Insert Jib
20	6.1 m	Luffing Insert Jib
30	9.1 m	Luffing Insert Jib

Fixed Jib Arrangements

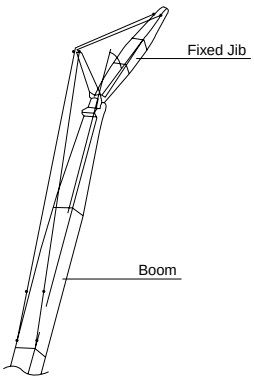

Crane boom length	Jib length m (ft)	Jib arrangement
24.4 m ~ 61.0 m	12.2 (40)	B 10 T
	18.3 (60)	B 10 20 T
	24.4 (80)	B 10 20 20 T
	30.5 (100)	B 10 20 20 20 T

Symbol	Jib Length	Remarks
B	4.6 m	Jib Base
T	4.6 m	Jib Top
10	3.0 m	Insert Jib
20	6.1 m	Insert Jib

https://truckmanualshub.com/

Luffing Boom Arrangements for Luffing

Boom length m (ft)	Boom arrangement
32.7 (107)	Rail for upper spreader of luffing jib B 30A 30 10 10 T
35.7 (117)	※ B 30A 30 10 20 T
38.8 (127)	※ B 30A 30 10 20 10 T
41.8 (137)	※ B 30A 30 10 30 10 T B 30A 30 10 20 20 T

Boom length m (ft)	Boom arrangement
44.8 (147)	※ B 30A 30 10 20 20 10 T B 30A 30 10 20 30 T
47.9 (157)	※ B 30A 30 10 20 30 10 T

※ Indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.

Symbol	Luffing Boom Length	Remarks
B	7.6 m	Boom Base
T	0.7 m	Luffing Boom Top
10	3.0 m	Insert Boom
20	6.1 m	Insert Boom
30	9.1 m	Insert Boom
30A	9.1 m	Special Insert Boom for Luffing

Luffing Boom Arrangements for Crane

Boom length m (ft)	Boom arrangement
14.4 (47)	B 10 10 T B 20 T
17.4 (57)	※ B 20 10 T
20.5 (67)	※ B 30A 10 T
23.5 (77)	※ B 30A 10 10 T B 30A 20 T
26.6 (87)	※ B 30A 20 10 T B 30A 30 T
29.6 (97)	※ B 30A 10 20 10 T B 30A 20 20 T B 30A 30 10 T
32.7 (107)	※ B 30A 20 20 10 T B 30A 30 10 10 T B 30A 30 20 T
35.7 (117)	※ B 30A 10 20 20 10 T B 30A 20 30 10 T B 30A 30 10 20 T

Boom length m (ft)	Boom arrangement
38.8 (127)	※ B 30A 10 20 30 10 T B 30A 30 10 20 10 T B 30A 30 20 20 T
41.8 (137)	※ B 30A 20 20 30 10 T B 30A 30 10 30 10 T B 30A 30 10 20 20 T B 30A 30 30 20 T
44.8 (147)	※ B 30A 10 20 20 30 10 T B 30A 30 10 20 20 10 T B 30A 30 10 20 30 T
47.9 (157)	※ B 30A 10 20 30 30 10 T B 30A 30 10 20 30 10 T B 30A 30 20 30 20 T

※ Indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.

Symbol	Luffing Boom Length	Remarks
B	7.6 m	Boom Base
T	0.7 m	Luffing Boom Top
10	3.0 m	Insert Boom
20	6.1 m	Insert Boom
30	9.1 m	Insert Boom
30A	9.1 m	Special Insert Boom for Luffing

https://truckmanualshub.com/

Luffing Jib Arrangements

Jib length m (ft)	Jib arrangement
22.9 (75)	JB 14A 20 JT
25.9 (85)	※ JB 14A 10 20 JT JB 14A 30 JT
29.0 (95)	※ JB 14A 10 10 20 JT JB 14A 20 20 JT JB 14A 10 30 JT
32.0 (105)	※ JB 14A 10 20 20 JT JB 14A 20 30 JT JB 14A 10 10 30 JT
35.1 (115)	※ JB 14A 10 20 30 JT JB 14A 30 30 JT

Jib length m (ft)	Jib arrangement
38.1 (125)	※ JB 14A 10 10 20 30 JT JB 14A 20 20 30 JT JB 14A 10 30 30 JT
41.1 (135)	※ JB 14A 10 20 20 30 JT JB 14A 20 30 30 JT
44.2 (145)	※ JB 14A 10 20 30 30 JT
47.2 (155)	※ JB 14A 10 10 20 30 30 JT JB 14A 20 20 30 30 JT
50.3 (165)	※ JB 14A 10 20 20 30 30 JT
53.3 (175)	※ JB 14A 10 20 30 30 30 JT

※ Indicates the most flexible combination of insert luffing jibs, which can be modified to form all shorter luffing jib arrangements.

Symbol	Luffing Jib Length	Remarks
JB	6.1 m	Luffing Jib Base
JT	6.4 m	Luffing Jib Top
14A	4.3 m	Relay Jib
10	3.0 m	Luffing Insert Jib
20	6.1 m	Luffing Insert Jib
30	9.1 m	Luffing Insert Jib

Luffing Boom and Jib Combinations

		Jib Length (m)										
		22.9	25.9	29.0	32.0	35.1	38.1	41.1	44.2	47.2	50.3	53.3
Boom Length (m)	32.7	○	○	○	○	○	○	○	○	○	○	○
	35.7	○	○	○	○	○	○	○	○	○	○	○
	38.8	○	○	○	○	○	○	○	○	○	○	○
	41.8	○	○	○	○	○	○	○	○	○	○	○
	44.8	○	○	○	○	○	○	○	○	○	○	○
	47.9	○	○	○	○	×	×	×	×	×	×	×

○ : Combinations which is allowed. × : Combinations which is not allowed.

https://truckmanualshub.com/

Hook Blocks

A range of hook blocks can be specified, each with a safety latch.

Hooks	Weight (kg)	No. of sheaves	No. of lines and max. rated loads (tons)							
			1	2	3	4	5	6	7	8
135-ton	1,700	5	-	27.0	40.5	54.0	67.5	81.0	94.5	108.0
70-ton	1,200	3	-	27.0	40.5	54.0	67.5	70.0	-	-
35-ton	900	1	-	27.0	35.0	-	-	-	-	-
13.5-ton ball hook	450	0	13.5	-	-	-	-	-	-	-
13.5-ton swivel hook	100	0	13.5	-	-	-	-	-	-	-

Hooks	Weight (kg)	No. of sheaves	No. of lines and max. rated loads (tons)	
			9	10
135-ton	1,700	5	121.5	135.0
70-ton	1,200	3	-	-
35-ton	900	1	-	-
13.5-ton ball hook	450	0	-	-
13.5-ton swivel hook	100	0	-	-

Main Hoist Drum Rated Loads in Metric Tons

No. of Parts of Line	1	2	3	4	5	6	7	8
Max. Loads (ton)	13.5	27.0	40.5	54.0	67.5	81.0	94.5	108.0

No. of Parts of Line	9	10
Max. Loads (ton)	121.5	135.0

Symbols for Attachments:

Crane Boom	Auxiliary Sheave for Crane Boom	Luffing Boom	Auxiliary Sheave for Luffing Boom	Long Boom	Auxiliary Sheave for Long Boom	Fixed Jib	Luffing Jib	Luffing Boom with Luffing Jib

https://truckmanualshub.com/

WORKING RANGES AND LIFTING CAPACITIES

Crane Boom Working Ranges

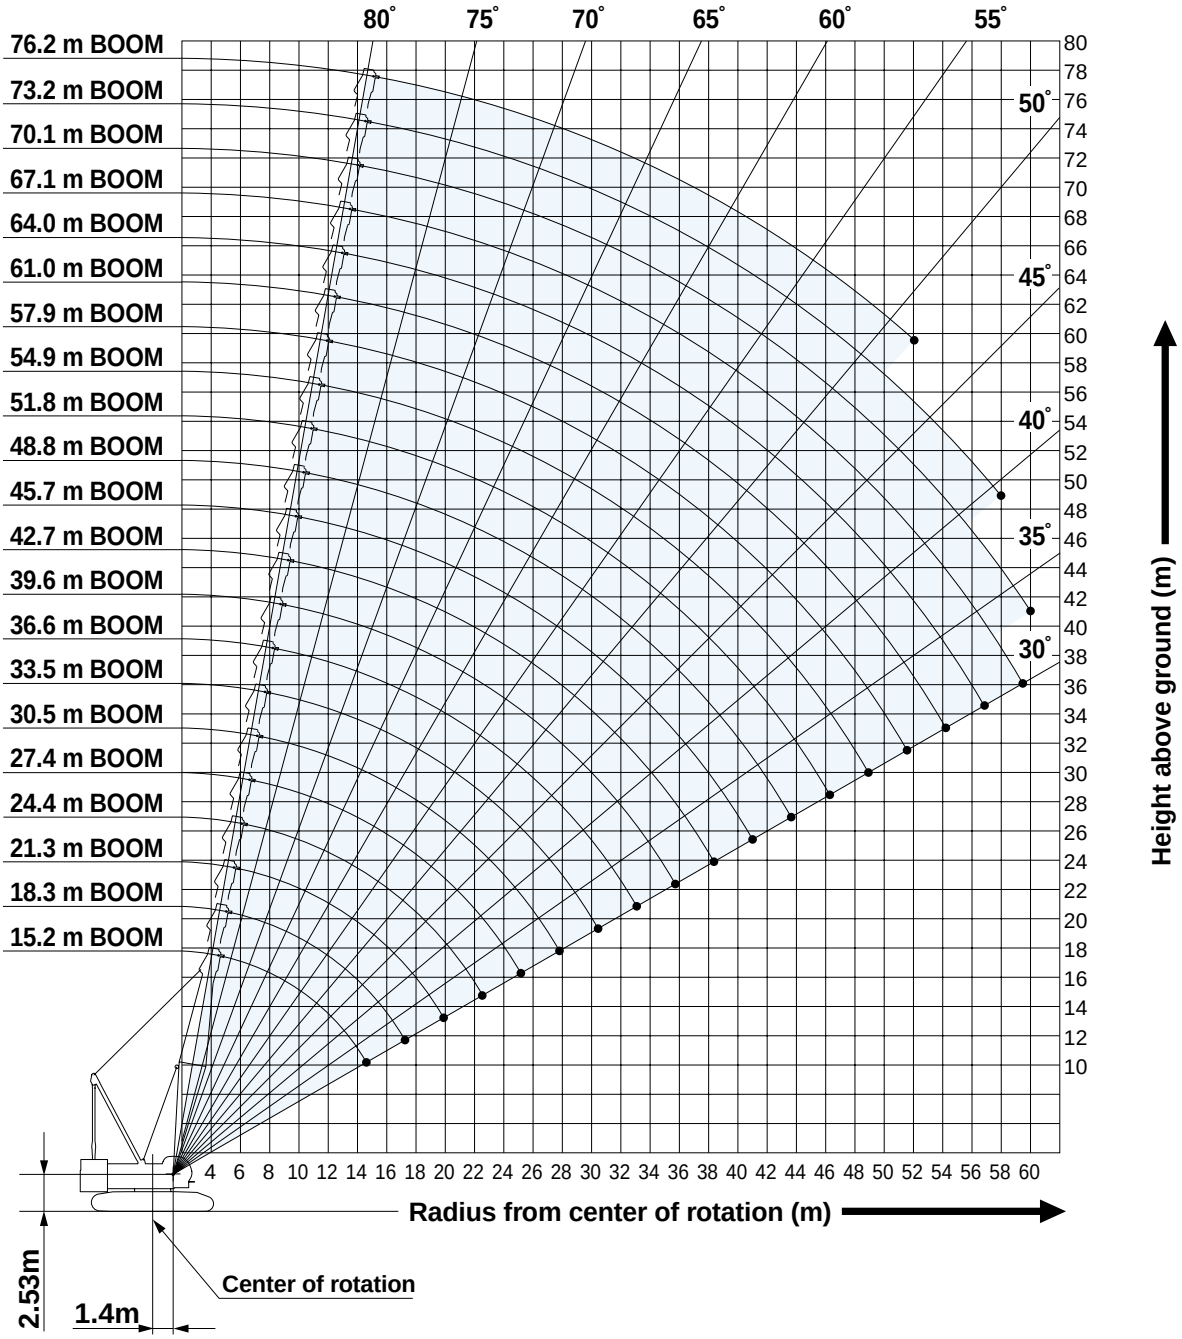

NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Weight of hook block(s), slings and other load handling accessories is included in rated load. Their total weight must be subtracted from rated load to obtain weight that can be lifted.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom inserts and guy lines must be arranged as shown in the "Operator's Manual".
9. Boom hoist reeving is 12 part line.
10. Gantry must be in raised position for all conditions.
11. Boom backstops are required for all boom lengths.
12. The boom should be erected over the front of crawlers, not laterally.
13. Ratings shown in ▭ are determined by the strength of the boom or other structural component.
14. When erecting or lowering the boom length of 73.2 m or over, the pillow plate for erection must be placed at the end of crawlers.
15. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
16. Crane boom ratings: Deduct weight of hook block, slings, and all other load handling accessories from crane boom ratings shown.
17. Auxiliary sheave ratings for crane boom: Deduct weight of hook block, slings, and all other load handling accessories from auxiliary sheave ratings for crane boom shown.
18. Crane boom lengths for auxiliary sheave mounting are 15.2 m to 73.2 m.

Crane Boom Lifting Capacity

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

Working radius (m) \ Boom length (m)	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7	48.8	Boom length (m) / Working radius (m)
4.5	4.5 m/135.0												**4.5**
5.0	131.1	5.1 m/128.4	5.6 m/117.2										**5.0**
6.0	110.4	110.1	109.6	6.1 m/107.8	6.7 m/95.1								**6.0**
7.0	95.1	94.8	93.3	91.1	89.3	7.2 m/84.2	7.7 m/75.3						**7.0**
8.0	79.5	79.9	79.1	77.4	75.9	74.6	72.4	8.2 m/67.8	8.8 m/61.7				**8.0**
9.0	67.7	68.8	68.5	67.2	66.0	64.9	62.5	61.5	60.0	9.3 m/56.3	9.8 m/51.8		**9.0**
10.0	58.4	59.0	59.0	58.8	58.3	57.4	56.5	55.0	53.6	52.2	50.9	10.4 m/47.8	**10.0**
12.0	44.3	45.7	45.6	45.4	45.2	45.2	45.1	44.9	44.1	43.0	42.0	41.0	**12.0**
14.0	33.5	37.1	37.0	36.8	36.6	36.5	36.5	36.3	36.2	36.1	35.6	34.7	**14.0**
16.0	14.8 m/29.3	30.0	31.0	30.8	30.6	30.5	30.4	30.2	30.1	30.0	29.9	29.8	**16.0**
18.0		17.5 m/24.8	26.6	26.4	26.2	26.1	26.0	25.8	25.7	25.6	25.4	25.3	**18.0**
20.0			21.7	23.0	22.8	22.7	22.6	22.4	22.3	22.2	22.0	21.9	**20.0**
22.0			20.1 m/21.3	19.9	20.1	20.0	19.9	19.7	19.6	19.5	19.3	19.2	**22.0**
24.0				22.8 m/18.5	18.0	17.9	17.7	17.5	17.4	17.3	17.1	17.0	**24.0**
26.0					25.4 m/16.0	16.1	16.0	15.7	15.6	15.5	15.3	15.2	**26.0**
28.0						14.2	14.5	14.2	14.1	13.9	13.8	13.6	**28.0**
30.0						28.1 m/14.1	13.2	12.9	12.8	12.7	12.5	12.3	**30.0**
32.0							30.7 m/12.5	11.8	11.7	11.5	11.4	11.2	**32.0**
34.0								33.3 m/10.9	10.8	10.6	10.4	10.3	**34.0**
36.0									9.7	9.8	9.6	9.4	**36.0**
38.0										8.9	8.8	8.7	**38.0**
40.0										38.6 m/8.6	8.1	8.0	**40.0**
42.0											41.2 m/7.5	7.4	**42.0**
44.0												43.9 m/6.5	**44.0**
Reeves	10	10	9	8	8	7	6	6	5	5	4	4	**Reeves**

Working radius (m) \ Boom length (m)	51.8	54.9	57.9	61.0	64.0	67.1	70.1	73.2	76.2	Boom length (m) / Working radius (m)
10.0	10.9 m/44.2	11.4 m/40.1	11.9m/38.4							**10.0**
12.0	40.0	39.1	38.2	12.5 m/35.8	13.0 m/33.4	13.5 m/26.7				**12.0**
14.0	33.9	33.2	32.5	31.7	30.9	26.7	14.1 m/26.7	14.6 m/24.4	15.1 m/20.4	**14.0**
16.0	29.3	28.7	28.1	27.4	26.7	26.3	25.7	22.7	19.4	**16.0**
18.0	25.2	25.1	24.6	24.0	23.4	23.0	22.5	20.6	17.5	**18.0**
20.0	21.7	21.6	21.5	21.2	20.7	20.4	19.9	18.8	15.8	**20.0**
22.0	19.0	18.9	18.8	18.6	18.4	18.1	17.7	17.1	14.3	**22.0**
24.0	16.8	16.7	16.6	16.4	16.2	16.2	15.8	15.4	13.0	**24.0**
26.0	15.0	14.9	14.7	14.6	14.4	14.4	14.2	13.8	11.8	**26.0**
28.0	13.5	13.4	13.2	13.1	12.9	12.8	12.7	12.4	10.7	**28.0**
30.0	12.2	12.1	11.9	11.7	11.6	11.5	11.4	11.2	9.7	**30.0**
32.0	11.1	10.9	10.8	10.6	10.4	10.4	10.2	10.0	8.8	**32.0**
34.0	10.1	10.0	9.8	9.6	9.4	9.4	9.2	9.1	8.0	**34.0**
36.0	9.2	9.1	8.9	8.8	8.6	8.5	8.4	8.2	7.2	**36.0**
38.0	8.5	8.4	8.2	8.0	7.8	7.8	7.6	7.4	6.5	**38.0**
40.0	7.8	7.7	7.5	7.3	7.1	7.1	6.9	6.7	5.8	**40.0**
42.0	7.2	7.1	6.9	6.7	6.5	6.5	6.3	6.1	5.2	**42.0**
44.0	6.7	6.5	6.4	6.2	6.0	5.9	5.7	5.5	4.6	**44.0**
46.0	5.9	6.0	5.9	5.7	5.4	5.3	5.2	4.9	4.0	**46.0**
48.0	46.5 m/5.7	5.3	5.4	5.2	4.9	4.9	4.7	4.4	3.5	**48.0**
50.0		49.2 m/4.8	4.7	4.7	4.5	4.4	4.2	4.0	2.9	**50.0**
52.0			51.8 m/4.1	4.2	4.1	4.0	3.8	3.6	2.4	**52.0**
54.0				3.6	3.6	3.5	3.4	3.2		**54.0**
56.0				54.4 m/3.4	3.0	3.1	3.0	2.8		**56.0**
58.0					57.1m/2.8	2.6	2.5	2.4		**58.0**
60.0						59.7 m/2.2	2.1			**60.0**
Reeves	4	3	3	3	3	2	2	2	2	**Reeves**

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structural components.
Refer to notes P12.

https://truckmanualshub.com/

Auxiliary Sheave Lifting Capacity for Crane Boom (With 70 t Main Hook)

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

Working radius (m) \ Boom length (m)	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7	48.8	Boom length (m) / Working radius (m)
5.0	5.5 m/27.0												**5.0**
6.0	27.0	6.1 m/27.0	6.6 m/27.0										**6.0**
7.0	27.0	27.0	27.0	7.1 m/27.0	7.7 m/27.0								**7.0**
8.0	27.0	27.0	27.0	27.0	27.0	8.2 m/27.0	8.7 m/27.0						**8.0**
9.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	9.2 m/27.0	9.8 m/27.0				**9.0**
10.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	10.3 m/27.0	10.8 m/27.0		**10.0**
12.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	11.4 m/27.0	**12.0**
14.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	**14.0**
16.0	14.8 m/27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	**16.0**
18.0		17.5 m /23.3	25.1	24.9	24.7	24.6	24.5	24.3	24.2	24.1	23.9	23.8	**18.0**
20.0			20.2	21.5	21.3	21.2	21.1	20.9	20.8	20.7	20.5	20.4	**20.0**
22.0			20.1 m/19.8	18.4	18.6	18.5	18.4	18.2	18.1	18.0	17.8	17.7	**22.0**
24.0				22.8 m/17.0	16.5	16.4	16.2	16.0	15.9	15.8	15.6	15.5	**24.0**
26.0					25.4 m/14.5	14.6	14.5	14.2	14.1	14.0	13.8	13.7	**26.0**
28.0						12.7	13.0	12.7	12.6	12.4	12.3	12.1	**28.0**
30.0						28.1 m/12.6	11.7	11.4	11.3	11.2	11.0	10.8	**30.0**
32.0							30.7 m/11.0	10.3	10.2	10.0	9.9	9.7	**32.0**
34.0								33.3 m/9.4	9.3	9.1	8.9	8.8	**34.0**
36.0									8.2	8.3	8.1	7.9	**36.0**
38.0										7.4	7.3	7.2	**38.0**
40.0										38.6 m/7.1	6.6	6.5	**40.0**
42.0											41.2 m/6.0	5.9	**42.0**
44.0												43.9 m/5.0	**44.0**
Reeves	2	2	2	2	2	2	2	2	2	2	2	2	**Reeves**

Working radius (m) \ Boom length (m)	51.8	54.9	57.9	61.0	64.0	67.1	70.1	73.2	Boom length (m) / Working radius (m)
12.0	11.9 m/27.0	12.4 m/27.0	12.9 m/27.0	13.5 m/27.0					**12.0**
14.0	27.0	27.0	27.0	27.0	27.0	14.5 m/25.2	15.1 m/25.2	15.6 m/22.9	**14.0**
16.0	27.0	27.0	26.6	25.9	25.2	24.8	24.2	21.2	**16.0**
18.0	23.7	23.6	23.1	22.5	21.9	21.5	21.0	19.1	**18.0**
20.0	20.2	20.1	20.0	19.7	19.2	18.9	18.4	17.3	**20.0**
22.0	17.5	17.4	17.3	17.1	16.9	16.6	16.2	15.6	**22.0**
24.0	15.3	15.2	15.1	14.9	14.7	14.7	14.3	13.9	**24.0**
26.0	13.5	13.4	13.2	13.1	12.9	12.9	12.7	12.3	**26.0**
28.0	12.0	11.9	11.7	11.6	11.4	11.3	11.2	10.9	**28.0**
30.0	10.7	10.6	10.4	10.2	10.1	10.0	9.9	9.7	**30.0**
32.0	9.6	9.4	9.3	9.1	8.9	8.9	8.7	8.5	**32.0**
34.0	8.6	8.5	8.3	8.1	7.9	7.9	7.7	7.6	**34.0**
36.0	7.7	7.6	7.4	7.3	7.1	7.0	6.9	6.7	**36.0**
38.0	7.0	6.9	6.7	6.5	6.3	6.3	6.1	5.9	**38.0**
40.0	6.3	6.2	6.0	5.8	5.6	5.6	5.4	5.2	**40.0**
42.0	5.7	5.6	5.4	5.2	5.0	5.0	4.8	4.6	**42.0**
44.0	5.2	5.0	4.9	4.7	4.5	4.4	4.2	4.0	**44.0**
46.0	4.4	4.5	4.4	4.2	3.9	3.8	3.7	3.4	**46.0**
48.0	46.5 m/4.2	3.8	3.9	3.7	3.4	3.4	3.2	2.9	**48.0**
50.0		49.2 m/3.3	3.2	3.2	3.0	2.9	2.7	2.5	**50.0**
52.0			51.8 m/2.6	2.7	2.6	2.5	2.3	2.1	**52.0**
54.0				2.1	2.1	2.0			**54.0**
Reeves	2	2	2	2	2	2	2	2	**Reeves**

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structural components.
Refer to notes P12.

https://truckmanualshub.com/

Luffing Boom Lifting Capacity

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

Working radius (m) \ Boom length (m)	14.4	17.4	20.5	23.5	26.6	29.6	32.7	35.7	38.8	41.8	44.8	47.9	Boom length (m) / Working radius (m)
5.0	5.4 m/80.0												**5.0**
6.0	80.0	80.0	6.5 m/80.0										**6.0**
7.0	80.0	80.0	80.0	80.0	7.5 m/80.0								**7.0**
8.0	80.0	79.4	78.8	77.0	75.2	8.1 m/72.7	8.6 m/66.0						**8.0**
9.0	68.2	68.2	68.1	66.8	65.3	63.8	62.5	9.1 m/60.3	9.7 m/55.7				**9.0**
10.0	58.3	58.3	58.2	58.1	57.7	56.4	55.2	54.1	53.4	10.2 m/51.3	10.7 m/48.0	11.2 m/44.5	**10.0**
12.0	44.1	44.9	44.8	44.7	44.6	44.4	44.3	43.8	43.1	42.3	41.9	41.2	**12.0**
14.0	32.5	36.4	36.2	36.1	36.0	35.8	35.6	35.5	35.4	35.3	35.0	34.2	**14.0**
16.0	14.6 m/29.1	29.3	30.2	30.1	30.0	29.8	29.6	29.5	29.4	29.2	29.2	29.0	**16.0**
18.0		17.3 m/24.5	25.8	25.7	25.6	25.3	25.2	25.1	24.9	24.8	24.7	24.5	**18.0**
20.0			19.9 m/20.7	22.3	22.2	21.9	21.8	21.7	21.5	21.4	21.3	21.1	**20.0**
22.0				19.0	19.5	19.3	19.1	19.0	18.8	18.7	18.6	18.4	**22.0**
24.0				22.5 m/17.8	17.3	17.1	16.9	16.8	16.6	16.5	16.4	16.2	**24.0**
26.0					25.2 m/15.5	15.3	15.2	15.0	14.8	14.7	14.6	14.4	**26.0**
28.0						27.8 m/13.4	13.7	13.5	13.3	13.2	13.1	12.9	**28.0**
30.0							12.2	12.2	12.0	11.9	11.8	11.6	**30.0**
32.0							30.5 m/11.7	11.1	10.9	10.8	10.7	10.5	**32.0**
34.0								33.1 m/10.2	10.0	9.8	9.7	9.5	**34.0**
36.0									35.7 m/8.8	9.0	8.9	8.6	**36.0**
38.0										7.9	8.1	7.9	**38.0**
40.0										38.4 m/7.7	7.2	7.2	**40.0**
42.0											41.0 m/6.7	6.4	**42.0**
44.0												43.7 m/5.6	**44.0**
Reeves	6	6	6	6	6	6	5	5	5	4	4	4	**Reeves**

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structural components.
Refer to notes P12 and below.

Auxiliary Sheave Lifting Capacity for Luffing Boom (With 70 t Main Hook)

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

Working radius (m) \ Boom length (m)	14.4	17.4	20.5	23.5	26.6	29.6	32.7	35.7	38.8	41.8	44.8	47.9	Boom length (m) / Working radius (m)
7.0	27.0	7.6 m/27.0											**7.0**
8.0	27.0	27.0	8.1 m/27.0	8.6 m/27.0									**8.0**
9.0	27.0	27.0	27.0	27.0	9.1 m/27.0	9.7 m/27.0							**9.0**
10.0	27.0	27.0	27.0	27.0	27.0	27.0	10.2 m/27.0	10.7 m/27.0	11.3 m/27.0	11.8 m/27.0			**10.0**
12.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	12.3 m/27.0	12.8 m/27.0	**12.0**
14.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	**14.0**
16.0	14.6 m/27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	**16.0**
18.0		17.3 m/23.0	24.3	24.2	24.1	23.8	23.7	23.6	23.4	23.3	23.2	23.0	**18.0**
20.0			19.9 m/19.2	20.8	20.7	20.4	20.3	20.2	20.0	19.9	19.8	19.6	**20.0**
22.0				17.5	18.0	17.8	17.6	17.5	17.3	17.2	17.1	16.9	**22.0**
24.0				22.5 m/16.3	15.8	15.6	15.4	15.3	15.1	15.0	14.9	14.7	**24.0**
26.0					25.2 m/14.0	13.8	13.7	13.5	13.3	13.2	13.1	12.9	**26.0**
28.0						27.8 m/11.9	12.2	12.0	11.8	11.7	11.6	11.4	**28.0**
30.0							10.7	10.7	10.5	10.4	10.3	10.1	**30.0**
32.0							30.5 m/10.2	9.6	9.4	9.3	9.2	9.0	**32.0**
34.0								33.1 m/8.7	8.5	8.3	8.2	8.0	**34.0**
36.0									35.7 m/7.3	7.5	7.4	7.1	**36.0**
38.0										6.4	6.6	6.4	**38.0**
40.0										38.4 m/6.2	5.7	5.7	**40.0**
42.0											41.0 m/5.2	4.9	**42.0**
44.0												43.7 m/4.1	**44.0**
Reeves	2	2	2	2	2	2	2	2	2	2	2	2	**Reeves**

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structural components.
Refer to notes P12 and below.

Note: Luffing boom
19. Luffing boom ratings: Deduct weight of hook block, slings and all other load handling accessories from luffing boom ratings shown.
20. Auxiliary sheave ratings for luffing boom: Deduct weight of hook block, slings and all other load handling accessories from auxiliary sheave ratings for luffing boom shown.
21. Luffing boom lengths for auxiliary sheave mounting are 14.4 m to 47.9 m.

https://truckmanualshub.com/

Long Boom Working Ranges

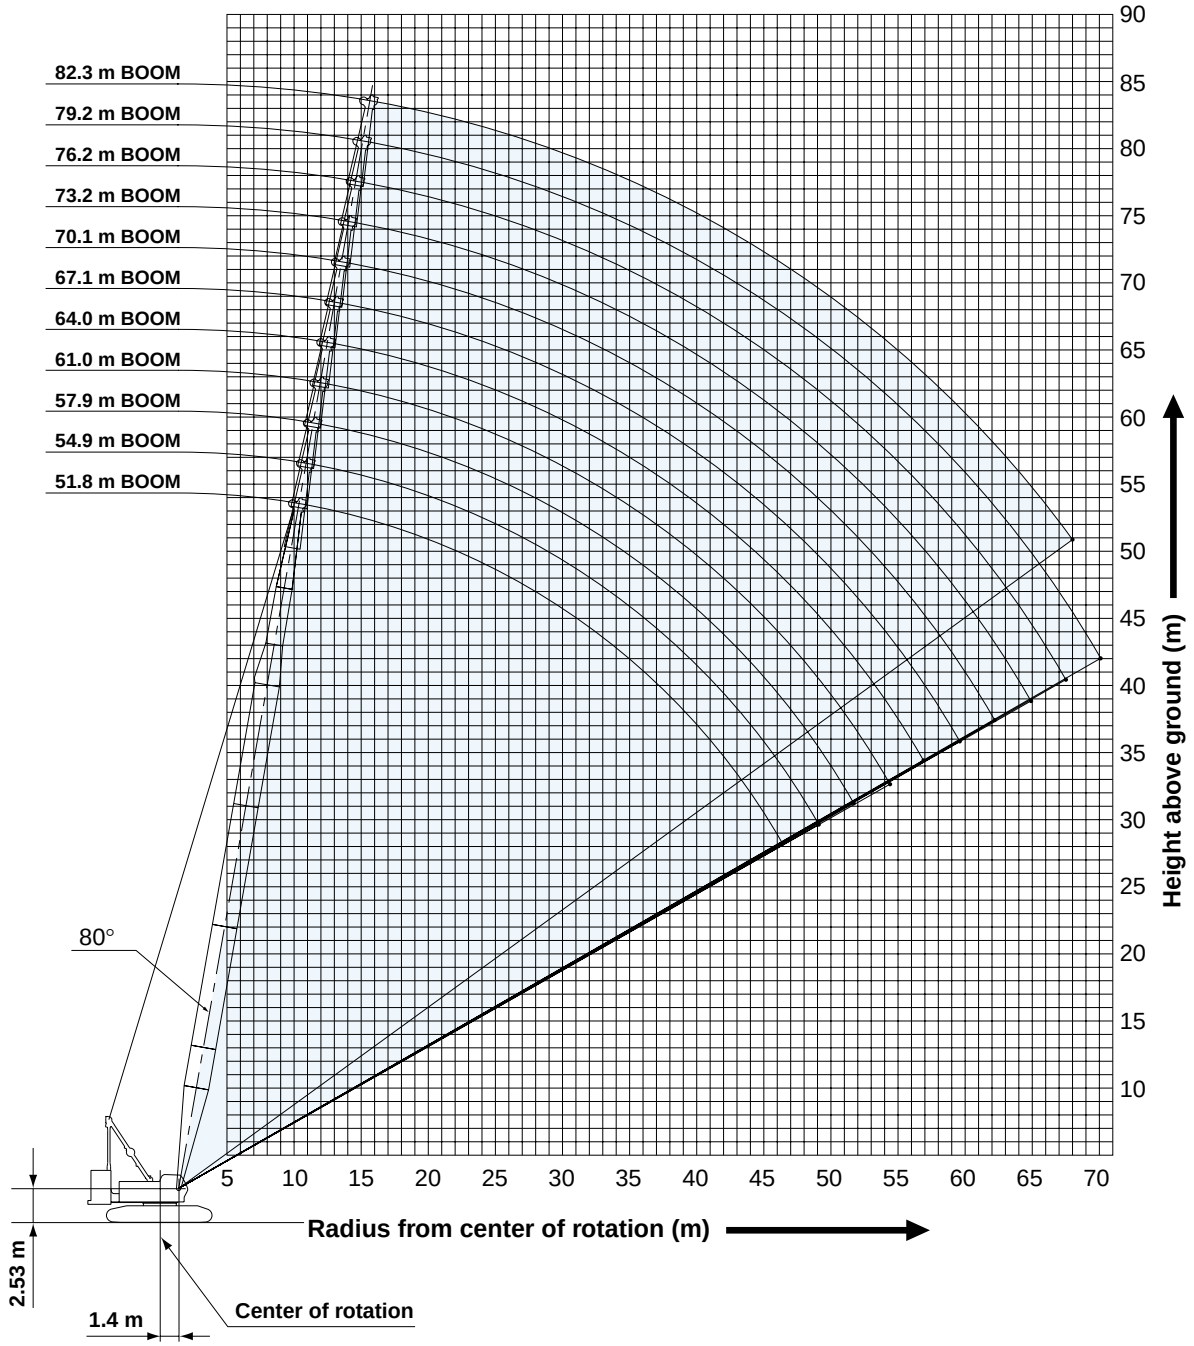

NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Weight of hook block(s), slings and other load handling accessories is included in rated load. Their total weight must be subtracted from rated load to obtain weight that can be lifted.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom inserts and guy lines must be arranged as shown in the “Operator's Manual”.
9. Boom hoist reeving is 12 part line.
10. Gantry must be in raised position for all conditions.
11. Boom backstops are required for all boom lengths.
12. The boom should be erected over the front of crawlers, not laterally.
13. Ratings shown in ▭ are determined by the strength of the boom or other structural component.
14. Instruction in the “Operator's Manual” must be strictly observed when operating the machine.
15. Long boom ratings: Deduct weight of hook block, slings, and all other load handling accessories from long boom ratings shown.
16. Auxiliary sheave ratings for long boom: Deduct weight of hook block, slings, and all other load handling accessories from auxiliary sheave ratings for long boom shown.
17. Long boom lengths for auxiliary sheave mounting are 51.8 m to 79.2 m.

https://truckmanualshub.com/

Long Boom Lifting Capacity

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

Working radius (m) \ Boom length (m)	51.8	54.9	57.9	61.0	64.0	67.1	70.1	73.2	76.2	79.2	82.3	Boom length (m) / Working radius (m)
10.0	10.6 m/44.3	11.2 m/40.5	11.7 m/38.2									**10.0**
12.0	41.6	40.1	37.8	12.2 m/35.3	12.7 m/33.5	13.3 m/27.0	13.8 m/26.0					**12.0**
14.0	36.1	36.0	35.5	33.4	32.4	27.0	25.8	14.3 m/22.3	14.9 m/19.4	15.4 m/17.0	15.9 m/15.0	**14.0**
16.0	30.1	30.0	29.8	29.7	29.6	27.0	23.7	20.8	18.5	16.6	14.9	**16.0**
18.0	25.6	25.6	25.4	25.2	25.1	25.2	22.0	19.2	17.1	15.3	13.7	**18.0**
20.0	22.2	22.2	22.0	21.8	21.7	21.8	20.5	17.9	15.9	14.2	12.7	**20.0**
22.0	19.5	19.5	19.3	19.1	19.0	19.1	19.0	16.8	14.9	13.3	11.9	**22.0**
24.0	17.4	17.3	17.1	16.9	16.8	16.9	16.8	15.8	14.0	12.5	11.1	**24.0**
26.0	15.6	15.5	15.3	15.1	15.0	15.1	15.0	14.9	13.2	11.8	10.5	**26.0**
28.0	14.1	14.0	13.8	13.6	13.5	13.6	13.5	13.4	12.5	11.1	9.9	**28.0**
30.0	12.8	12.7	12.5	12.3	12.2	12.3	12.2	12.1	11.9	10.6	9.5	**30.0**
32.0	11.7	11.6	11.4	11.2	11.1	11.2	11.0	11.0	10.9	10.1	9.0	**32.0**
34.0	10.7	10.6	10.4	10.2	10.1	10.2	10.1	10.0	10.0	9.7	8.6	**34.0**
36.0	9.8	9.8	9.6	9.4	9.2	9.3	9.2	9.2	9.1	9.0	8.3	**36.0**
38.0	9.1	9.0	8.8	8.6	8.5	8.6	8.4	8.4	8.3	8.2	8.0	**38.0**
40.0	8.4	8.3	8.1	7.9	7.8	7.9	7.8	7.7	7.7	7.5	7.5	**40.0**
42.0	7.8	7.7	7.5	7.3	7.2	7.3	7.2	7.1	7.0	6.9	6.9	**42.0**
44.0	7.3	7.2	7.0	6.8	6.7	6.7	6.6	6.6	6.5	6.4	6.3	**44.0**
46.0	6.8	6.7	6.5	6.3	6.2	6.2	6.1	6.1	6.0	5.9	5.8	**46.0**
48.0	46.4 m/6.8	6.3	6.1	5.9	5.7	5.8	5.7	5.6	5.5	5.4	5.4	**48.0**
50.0		49.1 m/6.1	5.7	5.5	5.3	5.4	5.2	5.2	5.1	5.0	4.9	**50.0**
52.0			51.7 m/5.4	5.1	5.0	5.0	4.9	4.8	4.7	4.6	4.5	**52.0**
54.0				4.8	4.6	4.6	4.5	4.4	4.4	4.2	4.1	**54.0**
56.0				54.4 m/4.7	4.3	4.3	4.2	4.1	4.0	3.9	3.8	**56.0**
58.0					56.9 m/4.1	4.0	3.8	3.8	3.7	3.5	3.4	**58.0**
60.0						59.6 m/3.8	3.5	3.5	3.4	3.2	3.1	**60.0**
62.0							3.3	3.2	3.1	3.0	2.9	**62.0**
64.0							62.2 m/3.2	2.9	2.9	2.7	2.6	**64.0**
66.0								64.9 m/2.8	2.6	2.5	2.4	**66.0**
68.0									67.5 m/2.4	2.2	2.1	**68.0**
70.0										2.0		**70.0**
72.0										70.1 m/2.0		**72.0**
Reeves	4	3	3	3	3	2	2	2	2	2	2	**Reeves**

Auxiliary Sheave Lifting Capacity for Long Boom (With 35 t Main Hook)

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

Working radius (m) \ Boom length (m)	51.8	54.9	57.9	61.0	64.0	67.1	70.1	73.2	76.2	79.2	Boom length (m) / Working radius (m)
10.0	11.3 m/13.5	11.9 m/13.5									**10.0**
12.0	13.5	13.5	12.4 m/13.5	12.9 m/13.5	13.4 m/13.5						**12.0**
14.0	13.5	13.5	13.5	13.5	13.5	13.5	14.5 m/13.5	15.0 m/13.5	15.6 m/13.5		**14.0**
16.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	16.1 m/13.5	**16.0**
18.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	**18.0**
20.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	12.9	**20.0**
22.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	12.0	**22.0**
24.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	12.7	11.2	**24.0**
26.0	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	11.9	10.5	**26.0**
28.0	12.8	12.7	12.5	12.3	12.2	12.3	12.2	12.1	11.2	9.8	**28.0**
30.0	11.5	11.4	11.2	11.0	10.9	11.0	10.9	10.8	10.6	9.3	**30.0**
32.0	10.4	10.3	10.1	9.9	9.8	9.9	9.7	9.7	9.6	8.8	**32.0**
34.0	9.4	9.3	9.1	8.9	8.8	8.9	8.8	8.7	8.7	8.4	**34.0**
36.0	8.5	8.5	8.3	8.1	7.9	8.0	7.9	7.9	7.8	7.7	**36.0**
38.0	7.8	7.7	7.5	7.3	7.2	7.3	7.1	7.1	7.0	6.9	**38.0**
40.0	7.1	7.0	6.8	6.6	6.5	6.6	6.5	6.4	6.4	6.2	**40.0**
42.0	6.5	6.4	6.2	6.0	5.9	6.0	5.9	5.8	5.7	5.6	**42.0**
44.0	6.0	5.9	5.7	5.5	5.4	5.4	5.3	5.3	5.2	5.1	**44.0**
46.0	5.5	5.4	5.2	5.0	4.9	4.9	4.8	4.8	4.7	4.6	**46.0**
48.0	47.4 m/5.2	5.0	4.8	4.6	4.4	4.5	4.4	4.3	4.2	4.1	**48.0**
50.0		4.7	4.4	4.2	4.0	4.1	3.9	3.9	3.8	3.7	**50.0**
52.0		50.1 m/4.7	4.1	3.8	3.7	3.7	3.6	3.5	3.4	3.3	**52.0**
54.0			52.7 m/3.9	3.5	3.3	3.3	3.2	3.1	3.1	2.9	**54.0**
56.0				55.4 m/3.3	3.0	3.0	2.9	2.8	2.7	2.6	**56.0**
58.0					57.9 m/2.8	2.7	2.5	2.5	2.4	2.2	**58.0**
60.0						2.5	2.2	2.2	2.1		**60.0**
62.0						60.6 m/2.4	2.0				**62.0**
Reeves	1	1	1	1	1	1	1	1	1	1	**Reeves**

Note: Ratings according to EN13000.

Ratings shown in [ ] are determined by the strength of the boom or other structural components.

Refer to notes P16.

https://truckmanualshub.com/

Fixed Jib Working Ranges

Jib Offset Angle: 10°, 30°

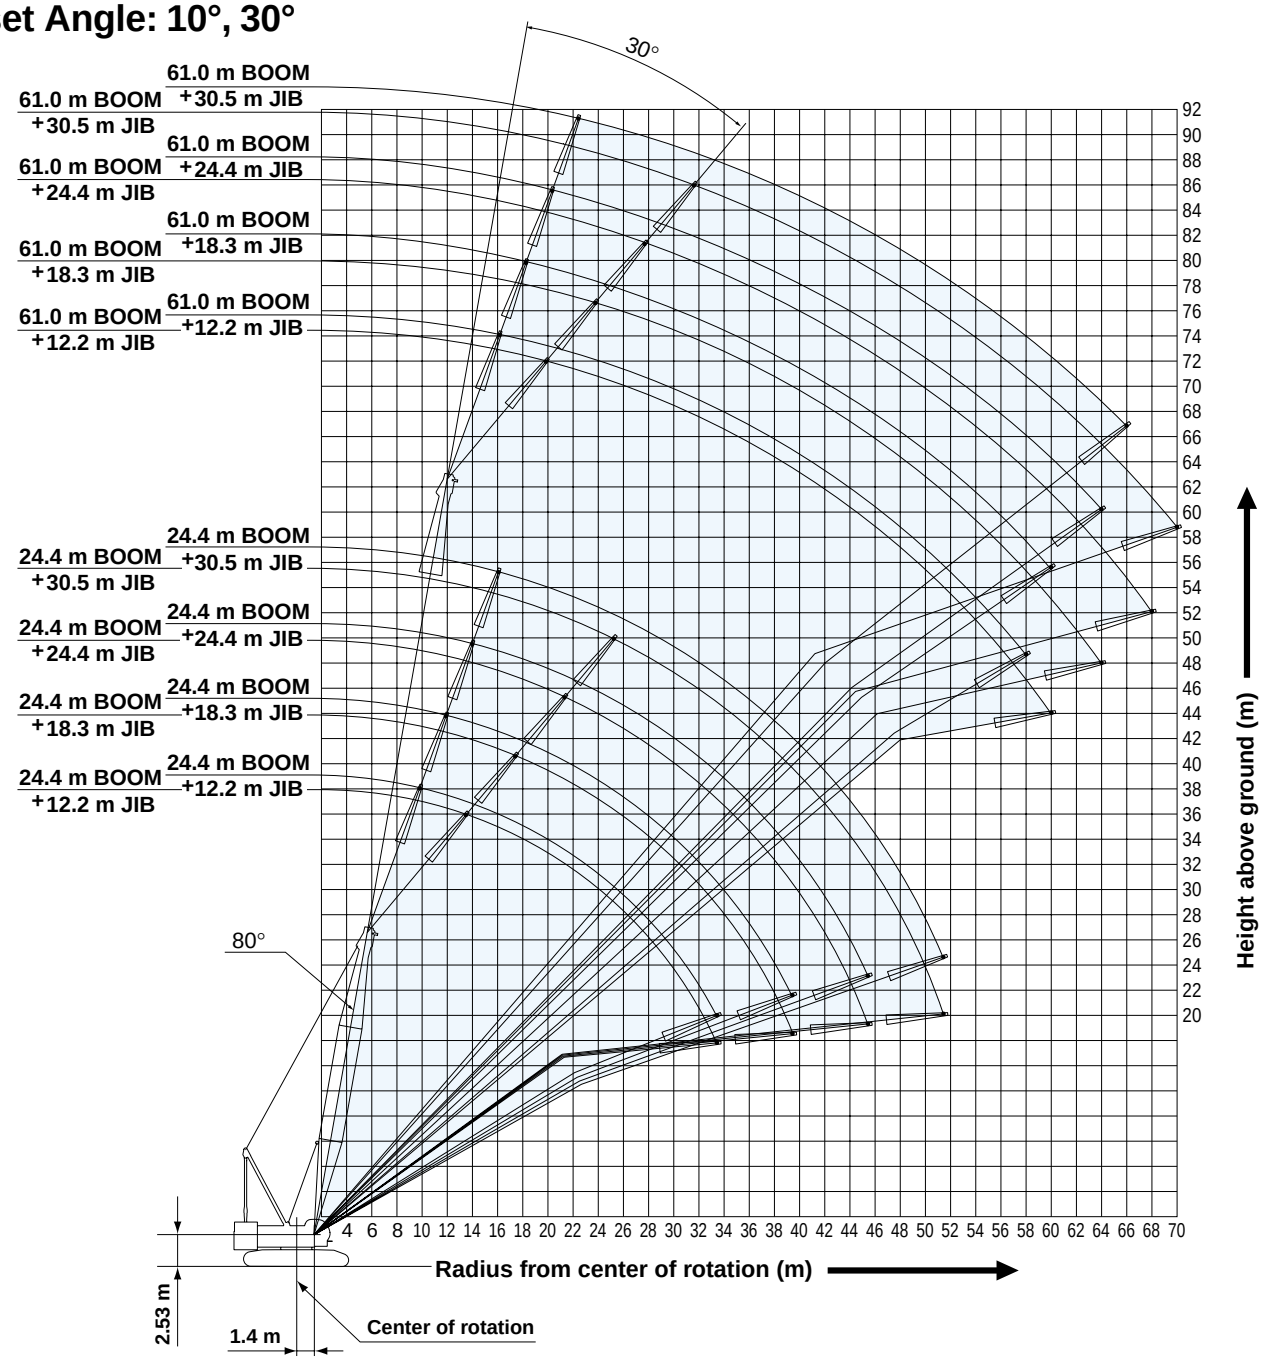

NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Weight of hook block(s), slings and other load handling accessories is included in rated load. Their total weight must be subtracted from rated load to obtain weight that can be lifted.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1 % gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom/ jib inserts and guy lines must be arranged as shown in the “Operator's Manual”.
9. Gantry must be in raised position for all conditions.
10. The boom should be erected over the front of crawlers, not laterally.
11. Boom backstops are required for all boom lengths.
12. Ratings shown in ▭ are determined by the strength of the boom or other structural component.
13. When erecting or lowering the boom length 73.2 m or over, the pillow plate must placed at the end of crawlers.
14. Instruction in the “Operator's Manual” must be strictly observed when operating the machine.
15. Fixed jib ratings: Deduct weight of jib hook block, slings, and all other load handling accessories from fixed jib ratings shown.
16. Crane boom lengths for fixed jib mounting are 24.4 m to 61.0 m.
17. One part of line on hook is not allowed to use for 12.2 m jib length with offset angle 10 degrees.

https://truckmanualshub.com/

Fixed Jib Lifting Capacities (Without Main Hook)

Unit: metric ton

Jib Offset Angle: 10°

Counterweight: 53.0 t, Carbody weight: 10.0 t

Boom length (m)	24.4				33.5				42.7				51.8				Boom length (m)
Jib length (m)	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	Jib length (m)
Working radius (m)																	Working radius (m)
9.0	9.9 m/26.8																9.0
10.0	26.8				11.5 m/26.8												10.0
12.0	26.7	19.2			26.8	13.5 m/19.2			13.0 m/26.8								12.0
14.0	25.8	18.9	14.3 m/9.9		26.8	19.1	15.9 m/9.9		26.8	15.1 m/19.2			14.6 m/26.8				14.0
16.0	24.9	18.3	9.7	16.4 m/5.9	26.0	18.8	9.9		26.8	19.1	17.5 m/9.9		26.8	16.7 m/19.1			16.0
18.0	24.1	17.7	9.5	5.8	25.3	18.4	9.7	5.9	26.0	18.8	9.8	19.6 m/5.9	25.6	19.0	19.1 m/9.9		18.0
20.0	22.9	16.8	9.2	5.6	23.0	17.9	9.5	5.7	22.5	18.4	9.7	5.9	22.1	18.8	9.8	21.2 m/5.9	20.0
22.0	20.8	15.2	8.8	5.3	20.3	17.4	9.3	5.6	19.8	18.0	9.5	5.7	19.3	18.4	9.6	5.8	22.0
24.0	18.6	13.9	8.4	5.0	18.1	16.4	9.0	5.4	17.6	17.6	9.4	5.6	17.1	17.4	9.5	5.7	24.0
26.0	16.8	12.8	8.0	4.8	16.2	15.1	8.6	5.1	15.7	16.0	9.1	5.5	15.2	15.5	9.4	5.6	26.0
28.0	15.2	11.9	7.7	4.5	14.7	14.0	8.3	4.9	14.2	14.4	8.8	5.2	13.7	13.9	9.2	5.5	28.0
30.0	13.9	11.1	7.4	4.3	13.4	13.1	8.0	4.7	12.9	13.1	8.5	5.0	12.4	12.6	8.9	5.3	30.0
34.0	11.2	9.7	6.9	4.0	11.3	11.5	7.5	4.3	10.7	10.9	8.0	4.7	10.2	10.4	8.4	4.9	34.0
38.0		8.7	6.5	3.7	9.7	9.8	7.1	4.0	9.1	9.3	7.6	4.3	8.6	8.8	8.0	4.6	38.0
42.0		40.0 m/8.3	6.2	3.4	7.8	8.5	6.7	3.8	7.8	8.0	7.2	4.1	7.3	7.5	7.6	4.3	42.0
46.0			6.0	3.2		7.3	6.4	3.5	6.7	6.9	6.8	3.8	6.2	6.4	6.7	4.1	46.0
50.0				3.1		48.0 m/6.4	6.1	3.3	5.2	6.0	6.3	3.6	5.2	5.5	5.8	3.9	50.0
54.0							5.4	3.2		4.9	5.5	3.4	4.1	4.6	5.0	3.7	54.0
58.0								3.0		56.0 m/4.3	4.6	3.3	3.1	3.7	4.3	3.5	58.0
62.0								60.0 m/2.9			60.0 m/4.1	3.1		2.9	3.5	3.3	62.0
66.0												3.0		64.0 m/2.4	2.8	3.1	66.0
70.0															68.0 m/2.4	2.4	70.0
Reeves	2	2	1	1	2	2	1	1	2	2	1	1	2	2	1	1	Reeves

Boom length (m)	57.9				61.0				Boom length (m)
Jib length (m)	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	Jib length (m)
Working radius (m)									Working radius (m)
14.0	15.7 m/24.0								14.0
16.0	24.0	17.8 m/19.1			16.2 m/21.2				16.0
18.0	23.5	19.1			20.7	18.3 m/19.1			18.0
20.0	21.7	18.9	20.1 m/9.9		20.3	18.9	20.7 m/9.9		20.0
22.0	19.0	18.7	9.7	22.2 m/5.9	18.7	18.7	9.8	22.8 m/5.9	22.0
24.0	16.7	17.0	9.6	5.8	16.6	16.7	9.6	5.8	24.0
26.0	14.9	15.2	9.5	5.7	14.8	14.9	9.5	5.7	26.0
28.0	13.3	13.6	9.3	5.6	13.2	13.4	9.4	5.6	28.0
30.0	12.0	12.2	9.2	5.5	11.9	12.1	9.3	5.5	30.0
34.0	9.8	10.1	8.7	5.1	9.7	10.0	8.8	5.2	34.0
38.0	8.2	8.4	8.2	4.8	8.1	8.3	8.4	4.9	38.0
42.0	6.9	7.1	7.4	4.5	6.7	7.0	7.3	4.6	42.0
46.0	5.8	6.0	6.3	4.2	5.6	5.9	6.2	4.3	46.0
50.0	4.8	5.1	5.4	4.0	4.6	4.9	5.3	4.1	50.0
54.0	3.8	4.2	4.7	3.8	3.7	4.0	4.5	3.9	54.0
58.0	2.9	3.4	3.9	3.6	2.8	3.2	3.7	3.7	58.0
62.0	2.1	2.6	3.2	3.3	2.1	2.5	3.0	3.1	62.0
66.0		64.0 m/2.3	2.5	2.7		64.0 m/2.1	2.3	2.5	66.0
70.0			68.0 m/2.2	2.1			68.0 m/2.0	68.0 m/2.2	70.0
Reeves	2	2	1	1	2	2	1	1	Reeves

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structural components.
Refer to notes P18.
※ One part of line on hook is not allowed to use for 12.2 m jib length with offset angle 10 degrees.

https://truckmanualshub.com/

Unit: metric ton

Jib Offset Angle: 30°

Counterweight: 53.0 t, Carbody weight: 10.0 t

Boom length (m)	24.4				33.5				42.7				51.8				Boom length (m)
Jib length (m)	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	Jib length (m)
Working radius (m)																	Working radius (m)
12.0	13.5 m/18.2																12.0
14.0	17.8				15.1 m/18.2												14.0
16.0	16.4	17.5 m/12.4			17.7				16.7 m/18.2								16.0
18.0	15.2	12.1			16.5	19.0 m/12.5			17.5				18.3 m/18.2				18.0
20.0	14.3	11.2	21.4 m/7.4		15.6	12.1			16.6	20.6 m/12.5			17.4				20.0
22.0	13.4	10.5	7.4		14.7	11.3	23.0 m/7.5		15.8	12.0			16.7	22.2 m/12.5			22.0
24.0	12.7	9.8	7.2	25.3 m/4.1	14.0	10.7	7.4		15.1	11.4	24.5 m/7.5		15.9	11.9			24.0
26.0	12.1	9.2	7.0	4.0	13.4	10.1	7.2	26.9 m/4.1	14.4	10.8	7.4		15.3	11.4	26.1 m/7.5		26.0
28.0	11.6	8.8	6.8	3.8	12.8	9.6	7.0	4.0	13.8	10.3	7.2	28.5 m/4.0	14.2	10.9	7.3		28.0
30.0	11.1	8.3	6.5	3.7	12.3	9.2	6.8	3.8	13.2	9.9	7.0	3.9	12.8	10.5	7.2	30.1 m/4.0	30.0
34.0	10.5	7.6	5.9	3.5	11.5	8.4	6.4	3.6	11.0	9.1	6.8	3.7	10.6	9.7	6.9	3.8	34.0
38.0		7.1	5.4	3.3	9.8	7.8	5.9	3.4	9.3	8.5	6.3	3.6	8.9	9.1	6.7	3.7	38.0
42.0		40.0 m/7.0	5.0	3.1	8.2	7.4	5.5	3.3	8.0	8.0	5.9	3.4	7.5	8.0	6.3	3.5	42.0
46.0			4.8	3.0		7.0	5.2	3.1	6.9	7.2	5.6	3.3	6.4	6.8	5.9	3.4	46.0
50.0				2.9		48.0 m/6.9	4.9	3.0	5.4	6.3	5.3	3.1	5.5	5.9	5.6	3.2	50.0
54.0				52.0 m/2.9			4.7	2.9		5.4	5.0	3.0	4.4	5.1	5.3	3.1	54.0
58.0								2.9		56.0 m/4.7	4.8	3.0	3.3	4.2	4.6	3.1	58.0
62.0								60.0 m/2.9			4.0	2.9		3.3	3.9	3.0	62.0
66.0												2.9		64.0 m/2.8	3.1	2.9	66.0
70.0												68.0 m/2.9			2.3	2.9	70.0
74.0																2.2	74.0
Reeves	2	1	1	1	2	1	1	1	2	1	1	1	2	1	1	1	Reeves

Boom length (m)	57.9				61.0				Boom length (m)
Jib length (m)	12.2	18.3	24.4	30.5	12.2	18.3	24.4	30.5	Jib length (m)
Working radius (m)									Working radius (m)
18.0	19.4 m/18.1				19.9 m/18.1				18.0
20.0	17.9				18.1				20.0
22.0	17.1	23.3 m/12.5			17.3	23.8 m/12.4			22.0
24.0	16.4	12.3			16.7	12.4			24.0
26.0	15.5	11.7	27.2 m/7.5		15.3	11.9	27.7 m/7.5		26.0
28.0	13.9	11.3	7.4		13.8	11.4	7.5		28.0
30.0	12.5	10.8	7.3	31.1 m/4.0	12.4	11.0	7.3	31.6 m/4.0	30.0
34.0	10.2	10.1	7.0	3.9	10.1	10.2	7.1	3.9	34.0
38.0	8.5	9.1	6.8	3.7	8.4	9.0	6.8	3.7	38.0
42.0	7.1	7.7	6.5	3.6	7.0	7.6	6.6	3.6	42.0
46.0	6.0	6.5	6.1	3.4	5.9	6.4	6.2	3.5	46.0
50.0	5.1	5.6	5.8	3.3	4.9	5.4	5.8	3.3	50.0
54.0	4.1	4.7	5.0	3.2	3.9	4.6	4.9	3.2	54.0
58.0	3.2	3.9	4.3	3.1	3.1	3.8	4.2	3.1	58.0
62.0	2.3	3.1	3.6	3.0	2.2	3.0	3.4	3.1	62.0
66.0		2.3	2.9	3.0		2.3	2.7	3.0	66.0
70.0			2.2	2.6			2.1	2.4	70.0
74.0				72.0 m/2.3				72.0 m/2.2	74.0
Reeves	2	1	1	2	1	1	1	1	Reeves

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structual components.
Refer to notes P18.

https://truckmanualshub.com/

Luffing Jib Working Ranges

Boom Angle: 88°

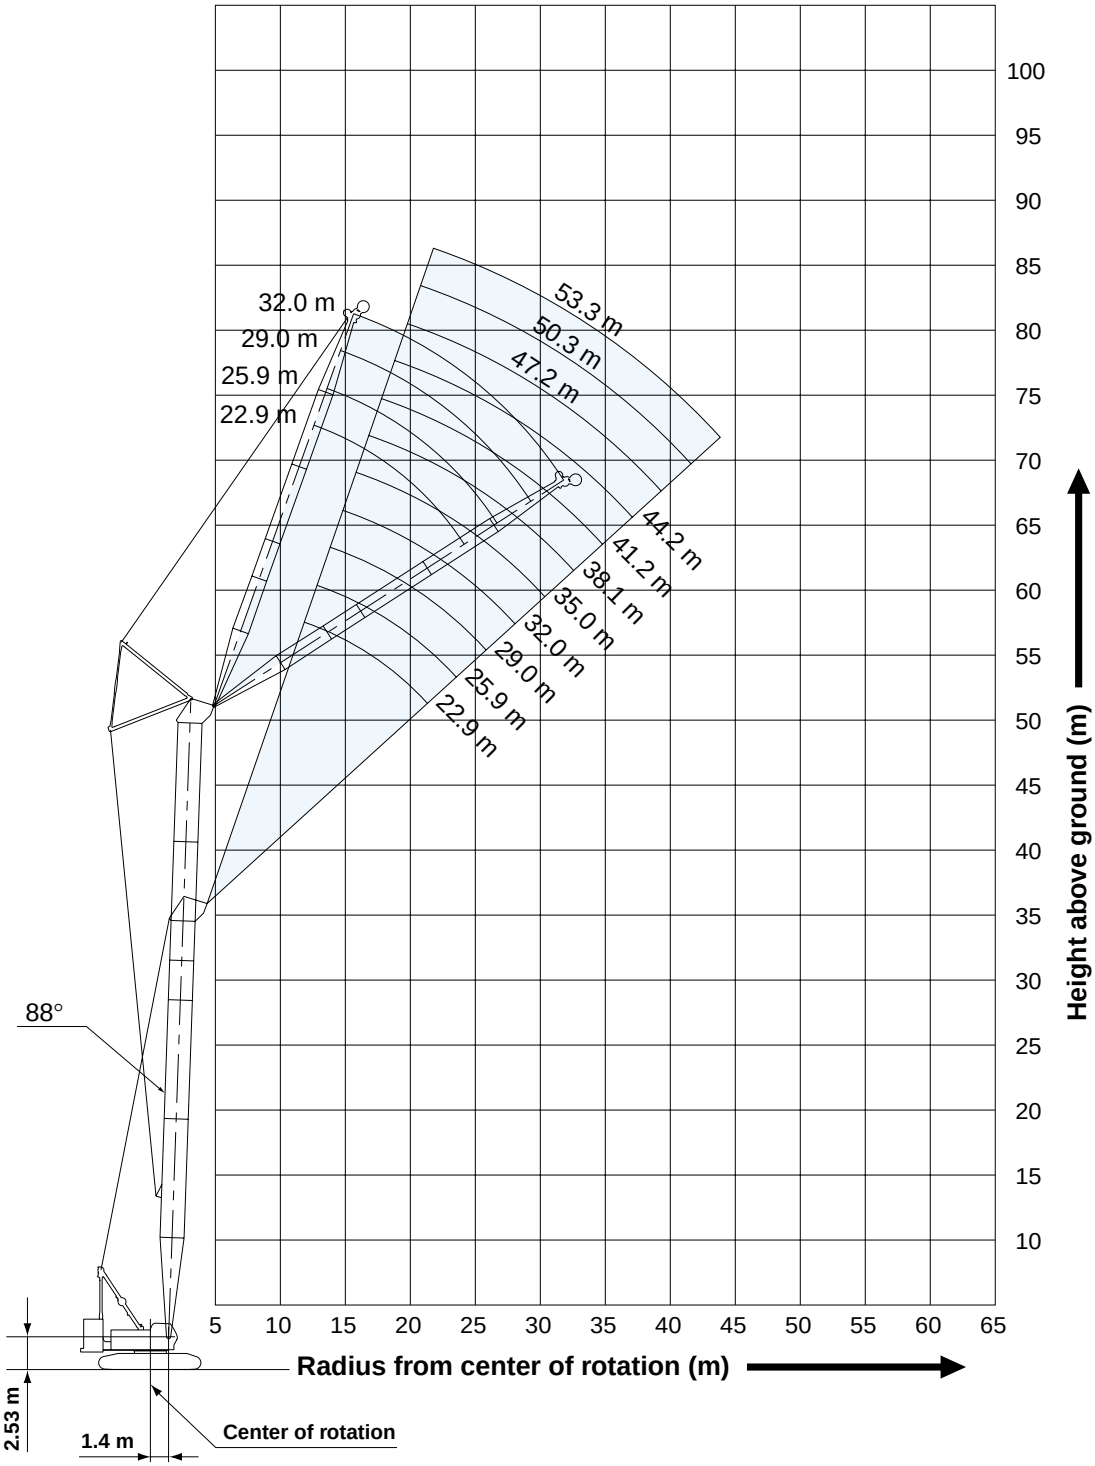

NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Weight of hook block(s), slings and other load handling accessories is included in rated load. Their total weight must be subtracted from rated load to obtain weight that can be lifted.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefor has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom/jib inserts and guy lines must be arranged as shown in the “Operator's Manual”.
9. Luffing boom hoist reeving is 12 part line.
10. Luffing jib hoist reeving is 8 part line.
11. Gantry must be in raised position for all conditions.

https://truckmanualshub.com/

Boom Angle: 68°

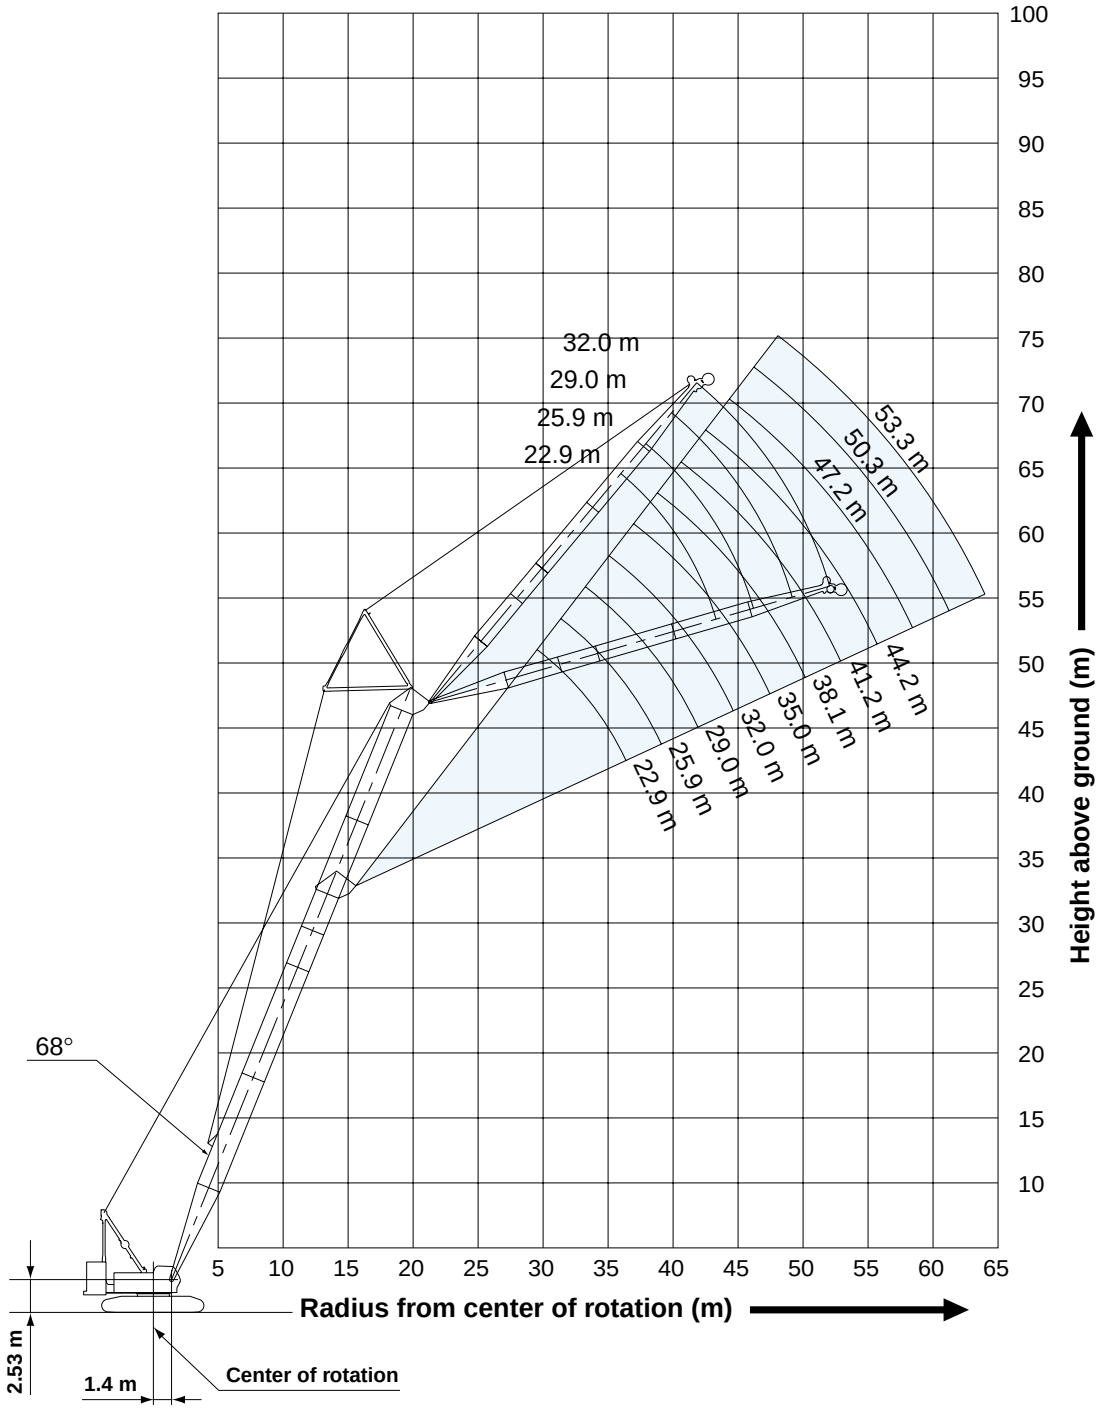

12. Boom and jib backstops are required for all boom and jib combinations.
13. Ratings shown in ▭ are determined by the strength of the boom or other structural component.
14. The boom should be erected over the front of crawlers, not laterally.
15. When erecting or lowering booms of the following lengths, pillow plate must placed at the end of crawlers:
    With 53.0 ton counterweight + 10.0 ton carbody weight:
    Boom length 44.8 m or over
    With optional 48.0 ton counterweight (no carbody weight):
    Boom length 38.8 m or over
16. Instruction in the “Operator's Manual” must be strictly observed when operating the machine.
17. The minimum rated load is 2.0 ton.
18. Luffing jib ratings: Deduct weight of jib hook block, slings, and all other load handling accessories from luffing jib ratings shown.
19. Luffing boom ratings with luffing jib: Deduct weight of main hook block, slings and all other load handling accessories from luffing boom ratings with luffing jib shown.

Luffing Jib Lifting Capacities (Without Main Hook)

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

32.7 m Boom Length

Boom length (m)	32.7																Boom length (m)
Jib length (m)	22.9				29.0				35.1				41.1				Jib length (m)
Boom angle / Working Radius (m)	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	Boom angle / Working Radius (m)
12.0	36.0																12.0
14.0	32.0				32.0												14.0
16.0	28.0				28.0				26.6								16.0
18.0	24.4	26.4			24.6				24.4				21.0				18.0
20.0	20.3	23.2			20.8	22.7			20.9				19.9				20.0
22.0	17.1	20.6			17.7	20.2			17.9	19.9			18.5				22.0
24.0	14.5	18.4			15.2	18.1			15.5	17.9			15.9	17.4			24.0
26.0		16.3			13.2	16.3			13.5	16.1			13.9	15.8			26.0
28.0		13.8			11.5	14.7			11.9	14.5			12.3	14.3			28.0
30.0			11.2		10.0	12.8			10.5	13.2			10.9	12.9			30.0
34.0			9.7	8.8		9.7	9.1		8.2	10.3			8.6	10.3			34.0
38.0				7.7			8.0	7.2	36.0 m/7.3	8.1	7.5		6.9	8.2			38.0
42.0				40.0 m/7.2			7.0	6.4		40.0 m/7.1	6.8	5.9	5.4	6.6	6.2		42.0
46.0								5.6			5.9	5.3		5.2	5.6	4.7	46.0
50.0											48.0 m/5.5	4.6			4.9	4.3	50.0
54.0												52.0 m/4.3			4.3	3.7	54.0
58.0																56.0 m/3.5	58.0
Reeves	3				3				2				2				Reeves

Boom length (m)	32.7							Boom length (m)
Jib length (m)	47.2				53.3			Jib length (m)
Boom angle / Working Radius (m)	88°	83°	68°	63°	88°	83°	68°	Boom angle / Working Radius (m)
20.0	16.8							20.0
22.0	15.9				13.3			22.0
24.0	15.1				12.6			24.0
26.0	13.7	15.0			12.0			26.0
28.0	12.1	13.8			11.4	13.1		28.0
30.0	10.7	12.7			10.5	12.4		30.0
34.0	8.5	10.1			8.4	10.7		34.0
38.0	6.8	8.1			6.7	8.6		38.0
42.0	5.5	6.6			5.4	6.9		42.0
46.0	4.4	5.3	4.9		44.0 m/4.0	5.6	48.0 m/4.2	46.0
50.0	48.0 m/3.9	4.2	4.6	3.6		4.3	4.2	50.0
54.0		52.0 m/3.7	3.9	3.4			3.7	54.0
58.0			3.4	2.9			3.1	58.0
62.0			60.0 m/3.2	2.5			2.7	62.0
64.0							2.5	64.0
Reeves	2				2			Reeves

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structural components.
Refer to notes P21 and 22.

35.7 m Boom Length

Boom length (m)	35.7																Boom length (m)
Jib length (m)	22.9				29.0				35.1				41.1				Jib length (m)
Boom angle / Working Radius (m)	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	Boom angle / Working Radius (m)
12.0	35.8																12.0
14.0	31.8				31.0												14.0
16.0	27.8				27.8				24.9								16.0
18.0	24.6	26.2			24.5				23.6				19.9				18.0
20.0	20.4	23.0			20.9	22.5			21.1				18.9				20.0
22.0	17.2	20.4			17.8	20.0			18.0	19.7			17.9				22.0
24.0	14.6	18.2			15.3	17.9			15.5	17.7			16.0	17.2			24.0
26.0		16.5			13.3	16.2			13.6	16.0			14.0	15.7			26.0
28.0		14.2			11.6	14.7			11.9	14.5			12.3	14.2			28.0
30.0			32.0 m/9.9		10.1	13.2			10.5	13.2			10.9	13.0			30.0
34.0			9.3	36.0 m/7.7		9.9	36.0 m/8.1		8.3	10.5			8.6	10.5			34.0
38.0			8.0	7.4			7.7	40.0 m/6.2	36.0 m/7.3	8.2	40.0 m/6.7		6.9	8.4			38.0
42.0				40.0 m/6.8			6.7	6.0		40.0 m/7.3	6.5	44.0 m/5.0	5.4	6.7	5.8		42.0
46.0							44.0 m/6.2	5.2			5.6	4.9		5.3	5.3	48.0 m/3.9	46.0
50.0											4.9	4.3			4.6	3.9	50.0
54.0												52.0 m/4.0			4.0	3.4	54.0
58.0															56.0 m/3.7	2.9	58.0
Reeves	3				3				2				2				Reeves

https://truckmanualshub.com/

Unit: metric ton

Counterweight: 53.0 t,
Carbody weight: 10.0 t

35.7 m Boom Length

Boom length (m)	35.7						Boom length (m)
Jib length (m)	47.2				53.3		Jib length (m)
Boom angle	88°	83°	68°	63°	88°	83°	Boom angle
Working Radius (m)							Working Radius (m)
20.0	16.0						20.0
22.0	15.2				12.8		22.0
24.0	14.4				12.1		24.0
26.0	13.7	14.8			11.5		26.0
28.0	12.1	13.7			10.9	12.7	28.0
30.0	10.8	12.6			10.4	12.0	30.0
34.0	8.5	10.3			8.4	10.6	34.0
38.0	6.9	8.3			6.7	8.7	38.0
42.0	5.5	6.7			5.4	7.0	42.0
46.0	4.4	5.4	4.6		44.0 m/3.9	5.7	46.0
50.0	48.0 m/3.9	4.3	4.2	52.0 m/2.9		4.4	50.0
54.0		52.0 m/3.8	3.7	2.9			54.0
58.0			3.2	2.6			58.0
62.0			2.7	2.2			62.0
64.0				2.0			64.0
Reeves	2				2		Reeves

38.8 m Boom Length

Boom length (m)	38.8																Boom length (m)
Jib length (m)	22.9				29.0				35.1				41.1				Jib length (m)
Boom angle	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	Boom angle
Working Radius (m)																	Working Radius (m)
12.0	35.6																12.0
14.0	31.6				28.7												14.0
16.0	27.6				27.2				23.2								16.0
18.0	24.8	26.0			24.5				22.0				18.8				18.0
20.0	20.6	22.8			21.1	22.3			20.9				17.8				20.0
22.0	17.3	20.2			17.9	19.8			18.1	19.4			16.9				22.0
24.0	14.7	18.1			15.4	17.7			15.6	17.5			16.1	17.0			24.0
26.0		16.3			13.4	16.0			13.6	15.8			14.1	15.5			26.0
28.0		14.7			11.6	14.5			12.0	14.3			12.4	14.0			28.0
30.0		11.7	32.0 m/9.4		10.1	13.3			10.6	13.1			11.0	12.8			30.0
34.0			8.9			10.2	36.0 m/7.6		8.3	10.7			8.7	10.7			34.0
38.0			7.7	6.6		36.0 m/8.4	7.3		36.0 m/7.3	8.4	40.0 m/6.2		6.9	8.5			38.0
42.0			40.0 m/7.1	5.9			6.3	5.2		40.0 m/7.4	6.1		5.5	6.8	44.0 m/4.9		42.0
46.0							44.0 m/5.9	4.7			5.3	4.1		5.4	4.9		46.0
50.0								48.0 m/4.4			4.6	3.8			4.2	3.1	50.0
54.0												3.3			3.6	2.9	54.0
58.0															56.0 m/3.4	2.5	58.0
62.0																60.0 m/2.3	62.0
Reeves	3				3				2				2				Reeves

Boom length (m)	38.8					Boom length (m)
Jib length (m)	47.2			53.3		Jib length (m)
Boom angle	88°	83°	68°	88°	83°	Boom angle
Working Radius (m)						Working Radius (m)
20.0	15.2					20.0
22.0	14.4			12.3		22.0
24.0	13.7			11.6		24.0
26.0	13.0	14.8		11.1		26.0
28.0	12.2	13.6		10.5		28.0
30.0	10.8	12.5		10.0	11.9	30.0
34.0	8.6	10.5		8.4	10.5	34.0
38.0	6.9	8.4		6.8	8.9	38.0
42.0	5.5	6.8		5.4	7.2	42.0
46.0	4.4	5.5	48.0 m/3.8	44.0 m/3.7	5.8	46.0
50.0	48.0 m/3.9	4.4	3.8		4.6	50.0
54.0		52.0 m/3.9	3.3			54.0
58.0			2.8			58.0
62.0			2.4			62.0
Reeves	2			2		Reeves

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structual components.
Refer to notes P21 and 22.

https://truckmanualshub.com/

Unit: metric ton

Counterweight: 53.0 t, Carbody weight: 10.0 t

41.8 m Boom Length

Boom length (m)	41.8																Boom length (m)
Jib length (m)	22.9				29.0				35.1				41.1				Jib length (m)
Boom angle / Working Radius (m)	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	Boom angle / Working Radius (m)
12.0	32.8																12.0
14.0	31.1				26.6												14.0
16.0	27.4				25.2				21.7								16.0
18.0	24.7	25.7			24.0				20.6				17.7				18.0
20.0	20.8	22.6			21.3	22.1			19.5				16.8				20.0
22.0	17.5	20.0			18.1	19.6			18.2	19.2			15.9				22.0
24.0	14.8	17.9			15.5	17.6			15.7	17.3			15.1				24.0
26.0		16.2			13.4	15.8			13.7	15.6			14.2	15.1			26.0
28.0		14.7			11.7	14.4			12.0	14.2			12.4	13.9			28.0
30.0		12.6			10.2	13.2			10.6	12.9			11.0	12.7			30.0
34.0			8.3			10.5			8.3	11.0			8.7	10.7			34.0
38.0			7.3	6.1		36.0 m/9.0	6.7		36.0 m/7.3	8.6			6.9	8.7			38.0
42.0			40.0 m/6.8	5.5			6.0	4.7		6.6	5.4		5.5	6.9	44.0 m/4.5		42.0
46.0				44.0 m/5.1			5.2	4.3			4.9	3.7		5.5	4.5		46.0
50.0								3.7			4.2	3.4		48.0 m/4.8	3.9	52.0 m/2.5	50.0
54.0											52.0 m/3.9	2.9			3.3	2.5	54.0
58.0												56.0 m/2.7			2.9	2.2	58.0
62.0																60.0 m/2.0	62.0
Reeves	3				2				2				2				Reeves

Boom length (m)	41.8					Boom length (m)
Jib length (m)	47.2			53.3		Jib length (m)
Boom angle / Working Radius (m)	88°	83°	68°	88°	83°	Boom angle / Working Radius (m)
20.0	14.4					20.0
22.0	13.6			11.8		22.0
24.0	12.9			11.2		24.0
26.0	12.3			10.6		26.0
28.0	11.7	13.4		10.1		28.0
30.0	10.9	12.5		9.6	11.4	30.0
34.0	8.6	10.6		8.4	10.2	34.0
38.0	6.9	9.1		6.8	8.8	38.0
42.0	5.5	7.4		5.5	7.3	42.0
46.0	4.4	6.0	48.0 m/3.4	44.0 m/3.7	5.9	46.0
50.0	48.0 m/3.8	4.8	3.4		4.8	50.0
54.0		3.6	3.0			54.0
58.0			2.5			58.0
62.0			2.1			62.0
64.0			2.0			64.0
Reeves	2			2		Reeves

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structural components.
Refer to notes P21 and 22.

44.8 m Boom Length

Boom length (m)	44.8															Boom length (m)
Jib length (m)	22.9				29.0				35.1				41.1			Jib length (m)
Boom angle / Working Radius (m)	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	Boom angle / Working Radius (m)
12.0	30.2															12.0
14.0	28.6				24.6											14.0
16.0	27.2				23.3				20.3							16.0
18.0	24.7	25.5			22.2				19.2				16.6			18.0
20.0	20.9	22.4			21.0	21.8			18.3				15.7			20.0
22.0	17.6	19.8			18.2	19.4			17.4				14.9			22.0
24.0	14.9	17.7			15.6	17.4			15.8	17.0			14.2			24.0
26.0		16.0			13.5	15.7			13.8	15.4			13.5	15.0		26.0
28.0		14.5			11.8	14.2			12.1	14.0			12.5	13.7		28.0
30.0		13.1			10.2	13.0			10.7	12.8			11.1	12.5		30.0
34.0			36.0 m/7.3			10.7			8.3	10.8			8.8	10.6		34.0
38.0			7.0	40.0 m/5.2		36.0 m/9.3	6.2		36.0 m/7.4	8.8			7.0	8.9		38.0
42.0			6.0	5.0			5.6	44.0 m/3.9		6.8	4.9		5.5	7.1		42.0
46.0				44.0 m/4.7			4.8	3.9			4.5	48.0 m/3.0		5.6	3.8	46.0
50.0							48.0 m/4.5	3.3			3.9	3.0		48.0 m/4.9	3.5	50.0
54.0											3.4	2.6			3.0	54.0
58.0												56.0 m/2.4			2.6	58.0
Reeves	3				2				2				2			Reeves

https://truckmanualshub.com/

Unit: metric ton

Counterweight: 53.0 t,
Carbody weight: 10.0 t

44.8 m Boom Length

Boom length (m)	44.8				Boom length (m)
Jib length (m)	47.2		53.3		Jib length (m)
Boom angle	88°	83°	88°	83°	Boom angle
Working Radius (m)					Working Radius (m)
20.0	13.7				20.0
22.0	13.0		11.2		22.0
24.0	12.3		10.6		24.0
26.0	11.7		10.1		26.0
28.0	11.1	13.1	9.6		28.0
30.0	10.6	12.4	9.1	10.8	30.0
34.0	8.6	10.4	8.2	9.7	34.0
38.0	6.9	8.9	6.8	8.7	38.0
42.0	5.6	7.6	5.5	7.4	42.0
46.0	4.4	6.1		6.0	46.0
50.0	48.0 m/3.7	4.9		4.9	50.0
54.0		3.7			54.0
Reeves	2		2		Reeves

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structual components.
Refer to notes P21 and 22.

47.9 m Boom Length

Boom length (m)	47.9												Boom length (m)
Jib length (m)	22.9				29.0				32.0				Jib length (m)
Boom angle	88°	83°	68°	63°	88°	83°	68°	63°	88°	83°	68°	63°	Boom angle
Working Radius (m)													Working Radius (m)
12.0	27.8												12.0
14.0	26.4				22.7								14.0
16.0	25.0				21.5				20.3				16.0
18.0	23.8	25.2			20.4				19.2				18.0
20.0	21.1	22.1			19.4				18.3				20.0
22.0	17.7	19.6			18.3	19.0			17.4	18.9			22.0
24.0	15.0	17.5			15.7	17.2			15.9	17.0			24.0
26.0		15.8			13.6	15.5			13.8	15.3			26.0
28.0		14.4			11.8	14.1			12.0	13.9			28.0
30.0		13.1			10.3	12.8			10.6	12.7			30.0
34.0			36.0 m/6.7			10.9			32.0 m/9.3	10.8			34.0
38.0			6.5			36.0 m/9.5	40.0 m/5.2			8.7			38.0
42.0			5.5	4.2			5.1			40.0 m/7.5	4.6		42.0
46.0				3.8			4.4	3.0			4.2	48.0 m/2.6	46.0
50.0							48.0 m/4.0	2.8			3.6	2.6	50.0
54.0								52.0 m/2.6			52.0 m/3.4	2.2	54.0
Reeves	3				2				2				Reeves

https://truckmanualshub.com/

Luffing Boom Lifting Capacities with Luffing Jib

Attached at 23 Degree Boom to Luffing Jib Offset Angle

Unit: metric ton

Counterweight: 53.0 t,
Carbody weight: 10.0 t

32.7 m Boom Length

Boom length (m)	32.7					
Jib length (m)	22.9	29.0	35.1	41.1	47.2	53.3
8.6 m	53.9	50.5	47.4	43.7	39.6	35.6
9.0 m	50.5	47.3	44.3	40.6	36.7	32.8
10.0 m	43.5	40.4	37.6	34.2	30.5	26.8
12.0 m	32.7	29.9	27.4	24.3	21.1	17.8
14.0 m	24.5	21.9	19.5	16.7	13.7	10.7
16.0 m	18.7	16.3	14.1	11.5	8.6	5.9
18.0 m	14.4	12.1	10.0	7.6	4.9	
20.0 m	11.2	9.0	7.0			
22.0 m	8.7	6.5				
24.0 m	6.7					
26.0 m	5.0					
Reeves	4	4	4	4	3	3

41.8 m Boom Length

Boom length (m)	41.8					
Jib length (m)	22.9	29.0	35.1	41.1	47.2	53.3
10.0 m	39.6	36.6	34.0	30.8	27.3	23.9
12.0 m	31.0	28.3	25.9	23.0	19.9	16.8
14.0 m	24.3	21.8	19.6	17.0	14.1	11.3
16.0 m	18.5	16.1	14.1	11.6	8.9	6.3
18.0 m	14.3	12.1	10.1	7.8	5.3	
20.0 m	11.0	8.9	7.1	4.8		
22.0 m	8.5	6.4				
24.0 m	6.4					
Reeves	3	3	3	3	3	2

35.7 m Boom Length

Boom length (m)	35.7					
Jib length (m)	22.9	29.0	35.1	41.1	47.2	53.3
9.1m	48.5	45.3	42.3	38.8	35.0	31.1
10.0 m	42.5	39.4	36.7	33.3	29.7	26.1
12.0 m	32.5	29.8	27.3	24.3	21.1	17.9
14.0 m	24.5	21.9	19.6	16.9	13.9	11.0
16.0 m	18.7	16.3	14.2	11.9	8.9	6.1
18.0 m	14.4	12.1	10.1	7.7	5.1	
20.0 m	11.2	9.0	7.1			
22.0 m	8.6	6.5				
24.0 m	6.7					
26.0 m	5.0					
Reeves	4	4	4	3	3	3

44.8 m Boom Length

Boom length (m)	44.8					
Jib length (m)	22.9	29.0	35.1	41.1	47.2	53.3
10.7 m	36.4	33.6	31.1	28.0	24.7	21.4
12.0 m	30.6	28.0	25.6	22.8	19.7	16.6
14.0 m	24.1	21.6	19.5	16.8	14.0	11.2
16.0 m	18.5	16.2	14.2	11.8	9.1	6.6
18.0 m	14.2	12.0	10.1	7.8	5.4	
20.0 m	11.0	8.9	7.1	4.9		
22.0 m	8.4	6.4				
24.0 m	6.3					
Reeves	3	3	3	3	2	2

38.8 m Boom Length

Boom length (m)	38.8					
Jib length (m)	22.9	29.0	35.1	41.1	47.2	53.3
9.7 m	43.7	40.6	37.8	34.5	30.9	27.2
10.0 m	41.4	38.5	35.7	32.4	28.9	25.4
12.0 m	31.6	28.9	26.5	23.5	20.4	17.2
14.0 m	24.3	21.8	19.6	16.9	14.0	11.1
16.0 m	18.5	16.1	14.0	11.5	8.8	6.2
18.0 m	14.3	12.1	10.1	7.7	5.1	
20.0 m	11.1	8.9	7.0			
22.0 m	8.5	6.4				
24.0 m	6.4					
Reeves	4	4	3	3	3	3

47.9 m Boom Length

Boom length (m)	47.9		
Jib length (m)	22.9	29.0	32.0
11.2 m	33.2	30.5	29.3
12.0 m	30.1	27.5	26.3
14.0 m	23.5	21.1	20.0
16.0 m	18.4	16.2	15.2
18.0 m	14.1	12.0	11.1
20.0 m	10.9	8.8	8.0
22.0 m	8.3	6.4	5.5
24.0 m	6.2		
Reeves	3	3	5

Note:
Ratings according to EN13000.
Ratings shown in [ ] are determined by the strength of the boom or other structual components.
Refer to notes P21 and 22.

https://truckmanualshub.com/

TRANSPORTATION PLAN

Luffing Boom 44.8 m + Luffing Jib 53.3 m

Configuration	Description	Total Weight
No.1 Low Loader 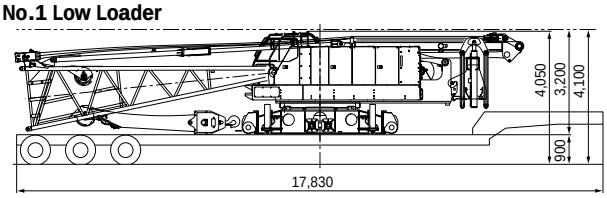 	Base machine with non-free fall winches (main & aux.) = Third drum for luffing jib hoist including wire rope = Total	39.7 ton 2.37 ton 42.07 ton
No.2 Low Loader 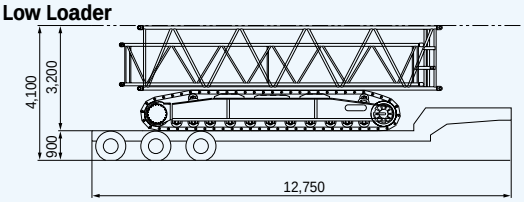 	Crawler (2 x 14.5 ton) = 9.1 m Insert Boom = 9.1 m Luffing Insert Jib = Total	29.0 ton 1.36 ton 0.84 ton 31.2 ton
No.3 Low Loader 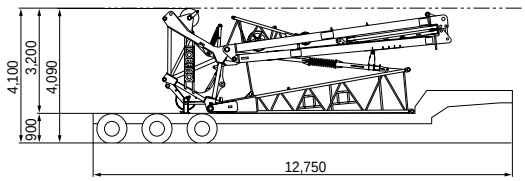 	Luffing Boom Top Assembly =	5.3 ton
No.4 Tent Side Truck 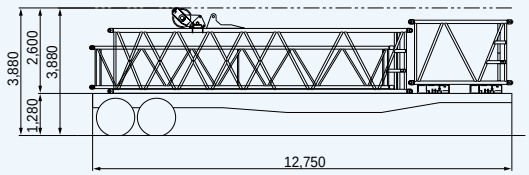 	9.1 m Special Insert Boom For Luffing = 9.1 m Luffing Insert Jib = 3.0 m Insert Boom = Counterweight C (2 x 2.5 ton) = Total	2.31 ton 0.84 ton 0.63 ton 5.0 ton 8.78 ton
No.5 Tent Side Truck 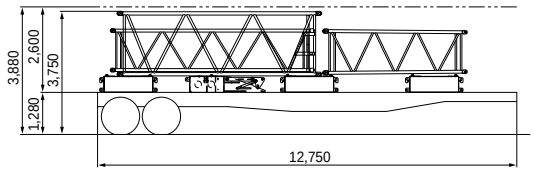 	6.1 m Insert Boom = 6.1 m Luffing Insert Jib = 4.3 m Relay Jib = Counterweight B (3 x 5.0 ton) = Carbodyweight = Total	1.00 ton 0.63 ton 0.41 ton 15.0 ton 5.0 ton 22.04 ton
No.6 Tent Side Truck 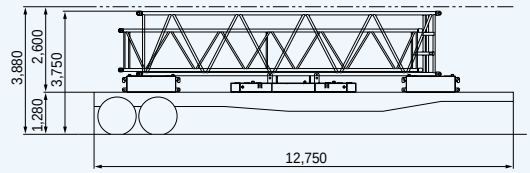 	9.1 m Insert Boom = 9.1 m Luffing Insert Jib = Counterweight A = Counterweight B (2 x 5.0 ton) = Total	1.36 ton 0.84 ton 8.0 ton 10.0 ton 20.2 ton
No.7 Tent Side Truck 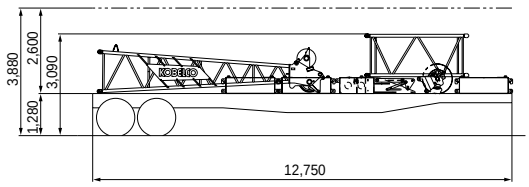 	3.0 m Luffing Insert Jib = Luffing Jib Top = Counterweight B (3 x 5.0 ton) = Carbodyweight = Auxiliary Sheave = Total	0.37 ton 1.34 ton 15.0 ton 5.0 ton 0.38 ton 22.09 ton

Note: Estimated weights may vary ± 2%.
This transportation plan depends on specifications of your trailers/trucks and the areas or countries where you transport.

https://truckmanualshub.com/

PARTS AND ATTACHMENTS

Dimensions: mm Weight: kg

Base Machine

With trans-lifter, 70 t hook, main and aux. winches (non-free fall) including wire rope, self removal device

Weight: 39,700 kg*1 Width: 3,200 mm

*1: With free-fall main and auxiliary winches, total weight increases by 790 kg.

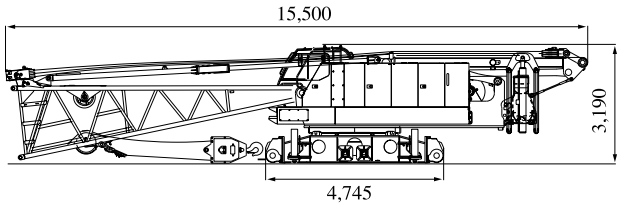

Crawler

Weight: 14,500kg Width: 910 mm



Gantry (with lower spreader)

Weight: 2,520kg

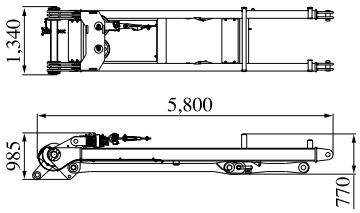

Translifter

Weight: 370kg / 1 piece



Boom Top

Weight: 1,880kg (with guy cables)



Tapered Insert Boom

Weight: 490kg



Boom Base (with boom backstop)

Weight: 3,680kg

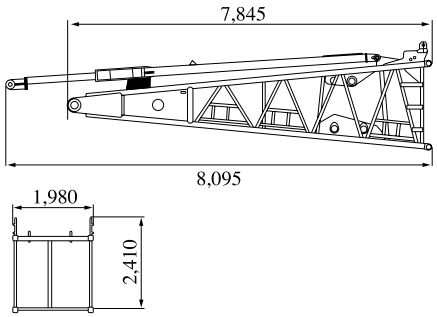

Insert Boom



	L (mm)	Weight (kg)*
3.0 m	3,180	630
6.1 m	6,230	1,000
9.1 m	9,270	1,360

* with guy cables

Counterweight A

Weight: 8,000kg

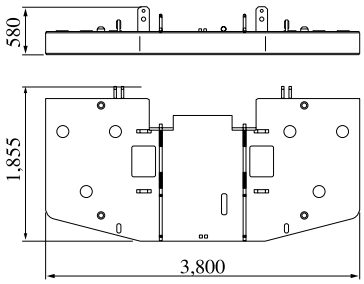

Counterweight B

Weight: 5,000kg x 8 pieces



Counterweight C

Weight: 2,500kg x 2 pieces



Carbodyweight

Weight: 5,000kg x 2 pieces



https://truckmanualshub.com/

Dimensions: mm Weight: kg

Luffing Boom Top Assembly
Weight: 5,300 kg

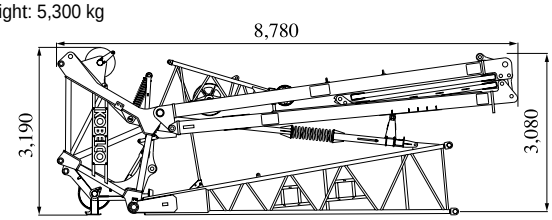

Luffing Boom Top
Weight: 2,465 kg



Luffing Jib Base
Weight: 1,200 kg

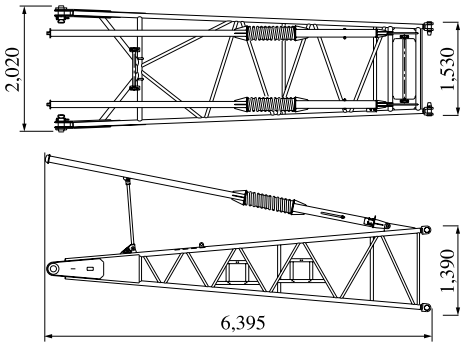

Luffing Jib Top
Weight: 1,340 kg (with guy cables)



Luffing Insert Jib



	L (mm)	Weight (kg)*
3.0 m	3,165	370
6.1 m	6,210	630
9.1 m	9,260	840

* with guy cables

Relay Jib (tapered Jib)
Weight: 410 kg

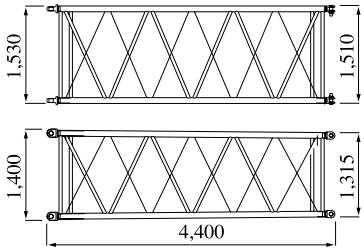

Jib Top (For Crane)
Weight: 315 kg

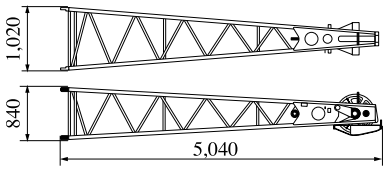

Jib Base with Strut (For Crane)
Weight: 510 kg Width: 1,040 mm

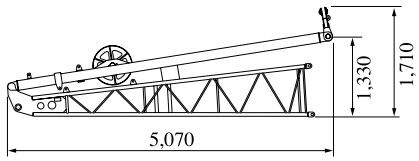

Other Attachments

Attachments	Weight	Dimensions (L x W x H)
9.1 m special insert boom for luffing	2,310 kg (with guy cables)	9,270 mm x 1,980 mm x 2,595 mm
3.0 m insert jib (for crane)	110 kg	3,130 mm x 840 mm x 1,020 mm
6.1 m insert jib (for crane)	190 kg	6,175 mm x 840 mm x 1,020 mm
Jib strut (for luffing)	2,010 kg	6,945 mm x 2,080 mm x 1,150 mm
Auxiliary sheave (for luffing)	380 kg	1,012 mm x 895 mm
Auxiliary sheave (for crane)	295 kg	725 mm x 2,030 mm
Rear guide roller	380 kg	2,880 mm x 1,100 mm x 1,090 mm
Boom upper spreader	485 kg	2,045 mm x 365 mm x 880 mm
Boom lower spreader	320 kg	1,150 mm x 255 mm x 910 mm
Jib upper spreader (for luffing)	260 kg	925 mm x 605 mm x 1,200 mm
Jib lower spreader (for luffing)	405 kg	1,940 mm x 460 mm x 1,070 mm
135 t hook block	1,700 kg	710 mm x 700 mm x 1,975 mm
70 t hook block	1,200 kg	470 mm x 700 mm x 1,825 mm
35 t hook block	900 kg	365 mm x 700 mm x 1,575 mm
Ball hook	450 kg	380 mm dia x 1,200 mm
Swivel hook	100 kg	300 mm x 160 mm dia. x 950 mm
Self removal device	1,680 kg	1,050 mm x 1,760 mm x 2,180 mm
Backstop (1 piece)	460 kg	6,985 mm x 275 mm

Note: Estimated weights may vary ± 2%.

https://truckmanualshub.com/

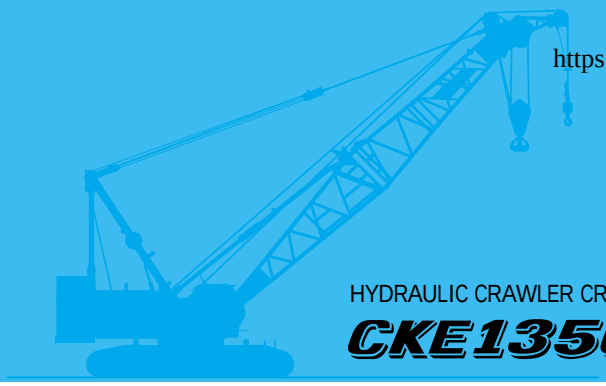

HYDRAULIC CRAWLER CRANE

CKE1350

Standard Equipment

Upper structure/Lower structure

Counterweight: 53.0 ton (total weight)
Carbody weight: 10.0 ton (total weight)
910 mm shoe crawlers
Batteries (170 Ah/20 HR)
Trans-lifter (jack system)
Gantry raising/lowering cylinder
Electric hand throttle grip
Variable boom hoist speed controller
Variable main/aux. hoist speed controller
Swing neutral-free/brake select switch
Side deck for cab
Steps (crawlers)
Two front working lights
Tools (for routine maintenance)
Two rear view mirrors
Electric fuel pump
Counterweight self removal
Crawler self removal
Cable roller (for boom)
Upper spreader storage guide
Tool box (front of left-side guard)

Cab/Control

Boom hoist pedal (EU area only)
Air conditioner
Cup holder
Ashtray
Cigar lighter
Intermittent wiper & window washer (skylight and front window)
Sun visor
Roof blind
Floor mat (cloth)
Foot rest
Shoe tray
Level gauge (operator cabin)

Safety Device

Load Moment Indicator (with boom lowering slow stop function)
LMI release key (for hook over-hoist prevention device and boom over-hoist prevention device)
LCD multi display
Ultimate stop function for boom over-hoist
Function lock lever
Propel lever lock
Mechanical drum lock pawl (main, aux. and boom hoist)
Signal horn
Swing parking brake
Mechanical swing lock pin (four positions)
Swing flashers/warning buzzer
Cab window guard (left side)
Cab top guard
Fire extinguisher
External lamp for over-load alarm
Life hammer

Note: Standard equipment may vary depending on your areas or countries.
Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice.

Copyright by KOBELCO CRANES CO., LTD. No part of this catalog may be reproduced in any manner without notice.

KOBELCO CRANES CO., LTD.
17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN
Tel: +81-3-5789-2130 Fax: +81-3-5789-3372

Inquiries To:

KOBELCO is the corporate mark used by Kobe Steel on a variety of products and in the names of a number of Kobe Steel Group companies.

Bulletin No. CKE1350-1FSPEC-EU3 080201IF Printed in Japan