



204 HP



77,150 lbs.

830 R-HD

C Series

green line Material Handling Machine



SENEBOGEN®

LEADING THROUGH INNOVATION

- Working radius up to 54'
- No computers required to control hydraulic system
- Ultra fine hydraulic oil filtration system reduces maintenance cost and down time of machine
- Central lubrication system standard
- State-of-the-art load-sensing hydraulic system
- Powerful maintenance-friendly design
- Low noise emission

Specifications



Engine

- 6 cylinder, water cooled, turbo Deutz diesel engine BF6M1013EC, with direct injection
- Output as per DIN/ISO: 204 HP at 2000 rpm
- Radiator fan is hydraulically driven and is reversible to clean out debris from radiator
- Equipped with engine intercooler
- Dry air filter with cyclone prefilter, safety element and pollution indicator
- Fuel tank capacity: 122 gallons
- Electrical system: 24 volt, 2 x 12 volt high performance batteries



Hydraulic System

- Computer free load-sensing hydraulic system with energy saving flow on demand control and pressure cut off function
- All working functions can be operated simultaneously and be individually controlled very precisely due to the independent and proportional split of the oil feed from the variable displacement pump
- Hydraulic system designed for low pressure losses and heat generation by large diameter piping and hoses as well as large control valves
- Pilot operated joy sticks control all working and auxiliary functions
- Flow rate 1 x 140 gpm
- Working pressure 5075 psi
- Hydraulic tank capacity 79.25 gallons
- Special ultra fine filtration system (99.95% efficiency at 2 micron) designed to protect the hydraulic system, extending the life of all components and reducing the down time of the machine as well as the maintenance and repair costs
- Full flow return oil filters with extended change intervals
- Oversized hydraulic oil cooler, mounted completely separated from the water radiator, maintaining the oil temperature at an ideal level. The fan is hydraulically driven and thermostatically controlled
- Centralized pressure test ports, easily accessible from ground level, mounted and well protected on the left side of the machine, enable fast trouble shooting of all machine functions without any electronic support



Swing System

- Axial piston motor, spring-loaded hydraulically releasable multiple-disk brake, planetary gear and pinion shaft
- Large dimensioned swing bearing
- Swing speed 0 - 8 rpm, infinitely controllable
- Hydraulic motor with integrated hydraulic brake valves keep wear and tear of braking system to a minimum



Undercarriage

- Transport optimized, variable gauge crawler undercarriage as rigid, torsion-free box-type design, available in two configurations:
 - R20/370-280 - Mechanically extendable undercarriage
 - T20/330L - Hydraulically extendable undercarriage
 - Maintenance-free crawler B60 with triple grouser track shoes 2'3" (700 mm), crawler length 16'9"
- Option:
- Canted flat track shoes
 - Each track is independently driven by an axial piston motor through a compact-planetary gear. The drives are integrated into the track frames
 - Lockable storage compartment
 - Spring-loaded hydraulically releasable multiple disk brakes as safety parking brakes
 - Hydraulic brake valves protect the drive motors on steep gradients

Travel speeds vary infinitely:
• 0 - 2.1 mph



Uppercarriage

- Torsion-free upper frame with continuous bearing-plates for optimal power introduction, precision machined
- Steel bushings for the boom pivot
- Low noise emission



Working Equipment

- Box-type design with large dimensioned sealed bearings for long working life
- Grapple open-close and rotate circuits installed on the machine
- Working cylinders with hydraulic end position damping
- Optimized design for high lifting capacities
- Equipped standard with safety check valves (load holding valves) for boom and stick cylinders
- The 830 R-HD C Series material handling equipment has been specially designed for the increased demands of high-performance operation, increased productivity and output



Magnet System

- 15 kW Baldor generator, belt driven for easy operation and maintenance, combined with a Hubbell controller



Grapple

- 0.75, 1.0 and 1.25 cu. yds. scrap grapple with rotation, 4 or 5 tine, open, semi-closed or closed, depending on the weight of the grapple and operating reach
- 0.75 to 2.0 cu. yds. clamshell grapple with rotation, depending on the material density, weight of the grapple and operating reach
- Log grapple available in different sizes and configurations depending on material being handled
- Contact Sennebogen for approval of the attachment before operating the machine
- Always refer to the lifting capacities on the chart before installing any attachment



Operating Weight

- Basic 830 R-HD with crawler undercarriage R20/370-280, material handling boom 24'3", stick 18'8" and scrap grapple 1 cu. yd.

Approximate weight 77,150 lbs.
Given weights may vary with different equipment




Operator's Cab

- Comfortable F2000 operator's cab resiliently mounted
- Sound absorbing insulation
- Roomy compartment with excellent all-round visibility
- All weather design with tinted safety glass
- Door window as sliding window
- Windshield can be pushed up under cab roof
- Large skylight
- Windshield wiper/washer on both windshield and skylight
- Sun visor
- Large capacity storage bin
- Ergonomically designed, air suspension and heated seat with adjustable armrests and lumbar support
- Well laid out instrument panel with ergonomically shaped joy sticks
- Infinitely variable cab heating system, outside air and circulating air stages with particle filter
- Five adjustable air vents for optimum work environment
- New Sennebogen Diagnostic System (SDS) for monitoring all essential machine and engine functions with visual and audible warning system
- 12 and 24 volt power supply
- Air conditioning
- AM/FM radio with cassette

Certification according to regulations

Subject to technical modification

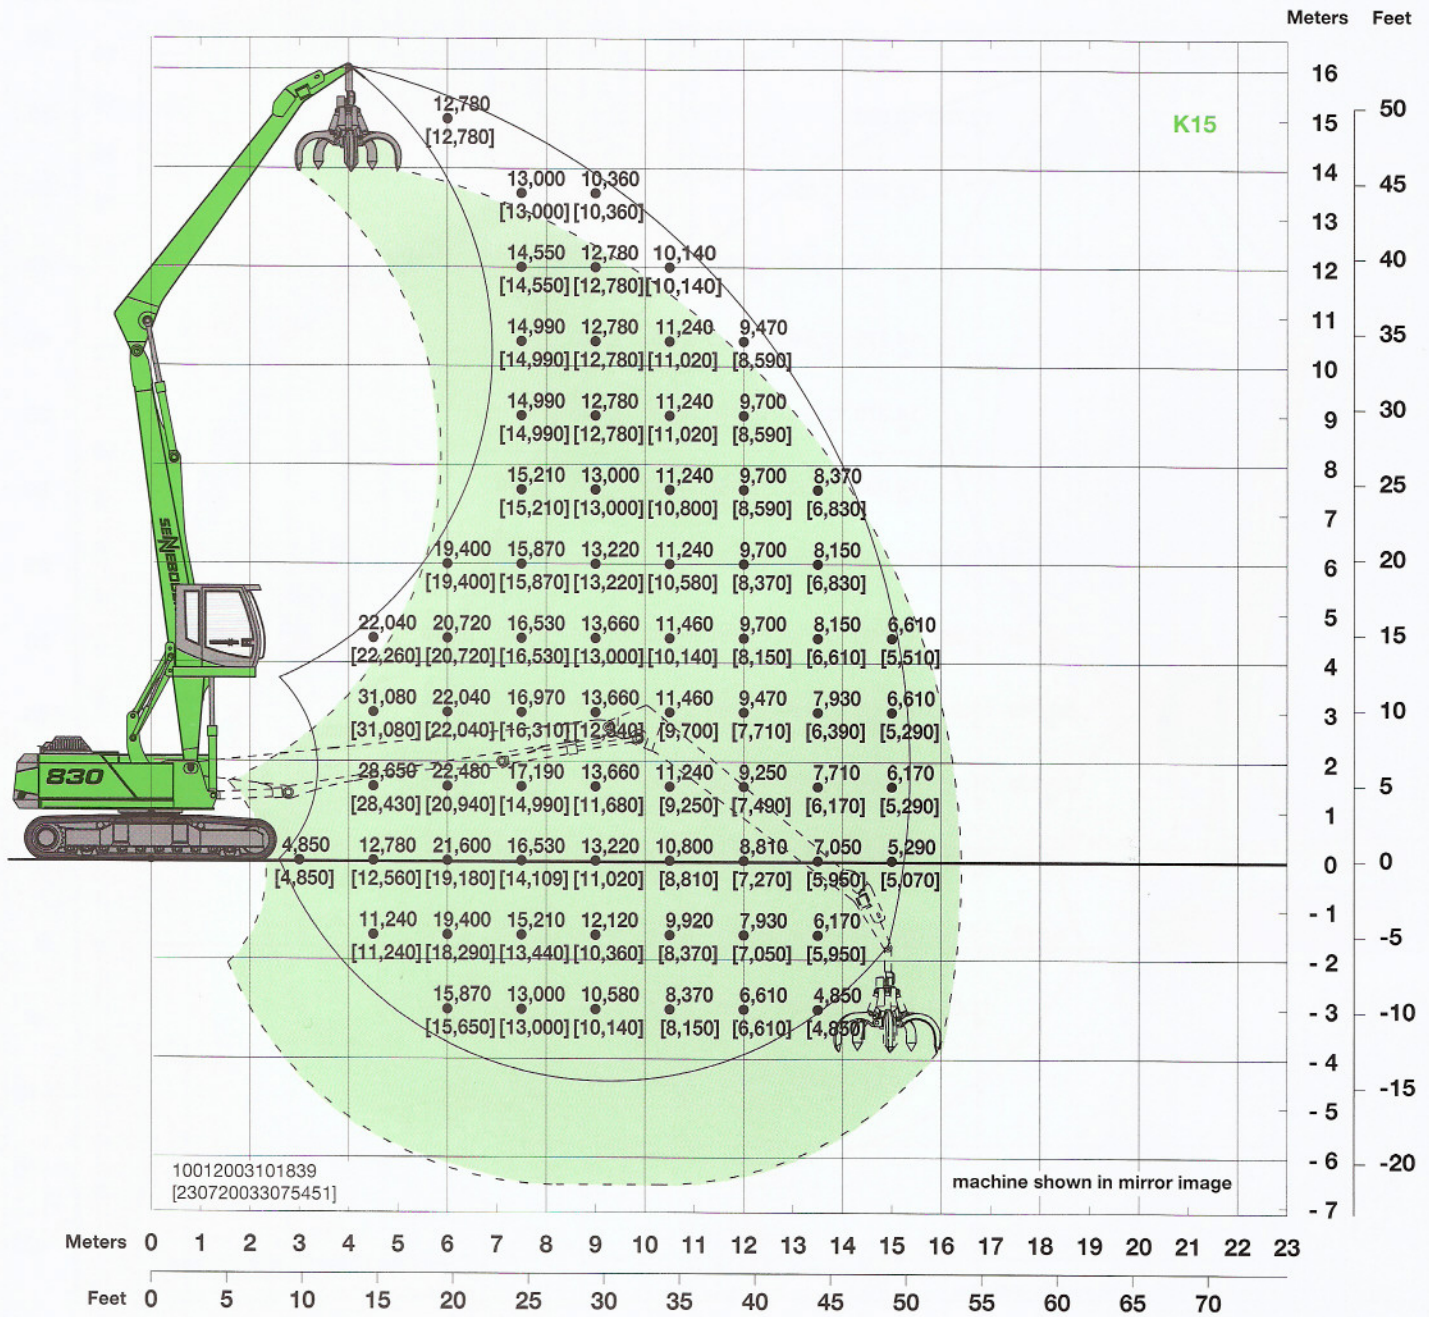

830 R-HD

- **Undercarriage:** Mechanically extendable wide gauge or optional hydraulically extendable undercarriage with crawler B60, crawler length 16'9"
- **Boom:** 27'10"
- **Stick:** 23'7"
- **Cab:** C 270 hydraulic elevating cab with operator's eye level 18'

Load chart

Notes:


Lifting capacities are stated in pounds. Indicated loads are based on ISO 10567 and do not exceed 75% of tipping and 87% of hydraulic capacity. Machine on firm, level supporting surface. Loads valid for 360° with maximum extended undercarriage. The upper capacities are valid with wide gauge undercarriage, the lower capacities in brackets [...] are valid with hydraulic extendable undercarriage.

Lifting capacities do not include working attachments such as scrap grapples, magnets, etc. Their weights must be deducted from the numbers indicated in the lifting charts.

SENEBOGEN


green line

830 R-HD

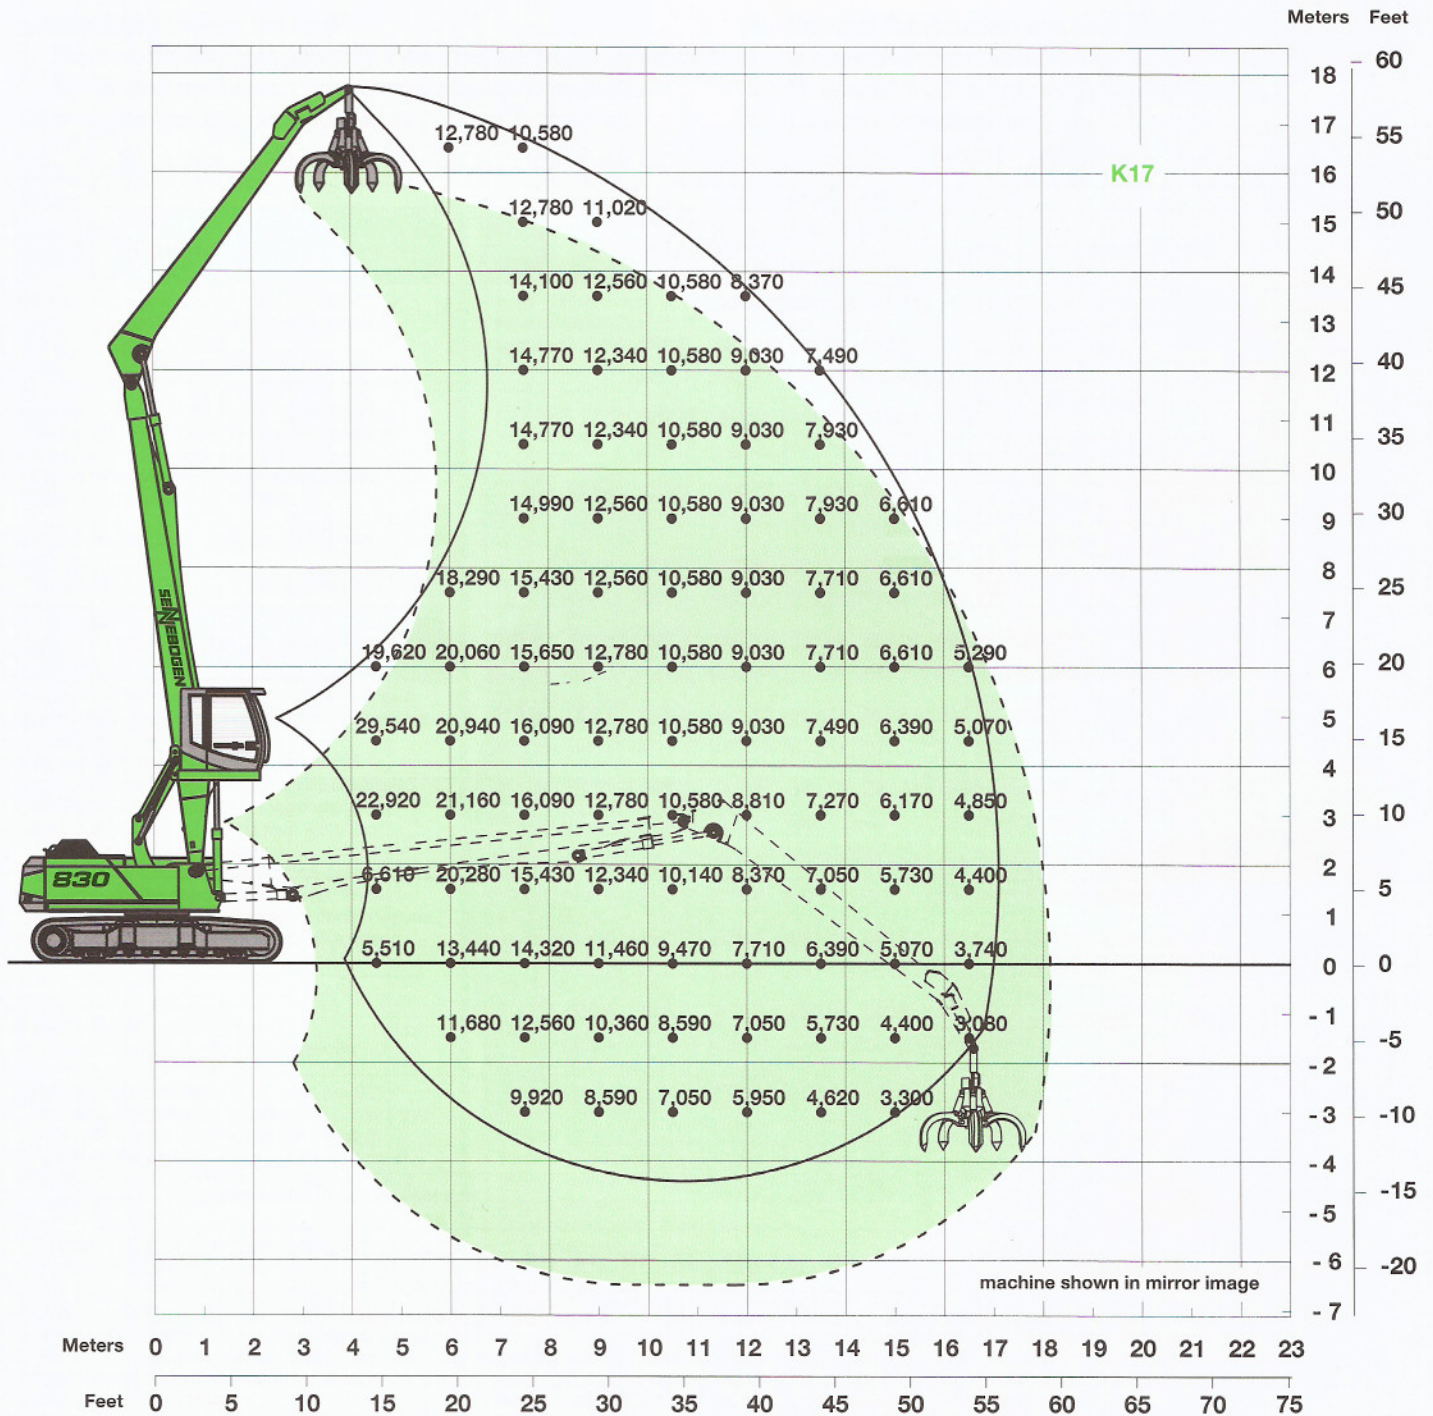

830 R-HD

- Undercarriage: Mechanically extendable wide gauge or optional hydraulically extendable undercarriage with crawler B60, crawler length 16'9"
- Boom: 24'3"
- Stick: 18'8"
- Cab: C 270 hydraulic elevating cab with operator's eye level 18'

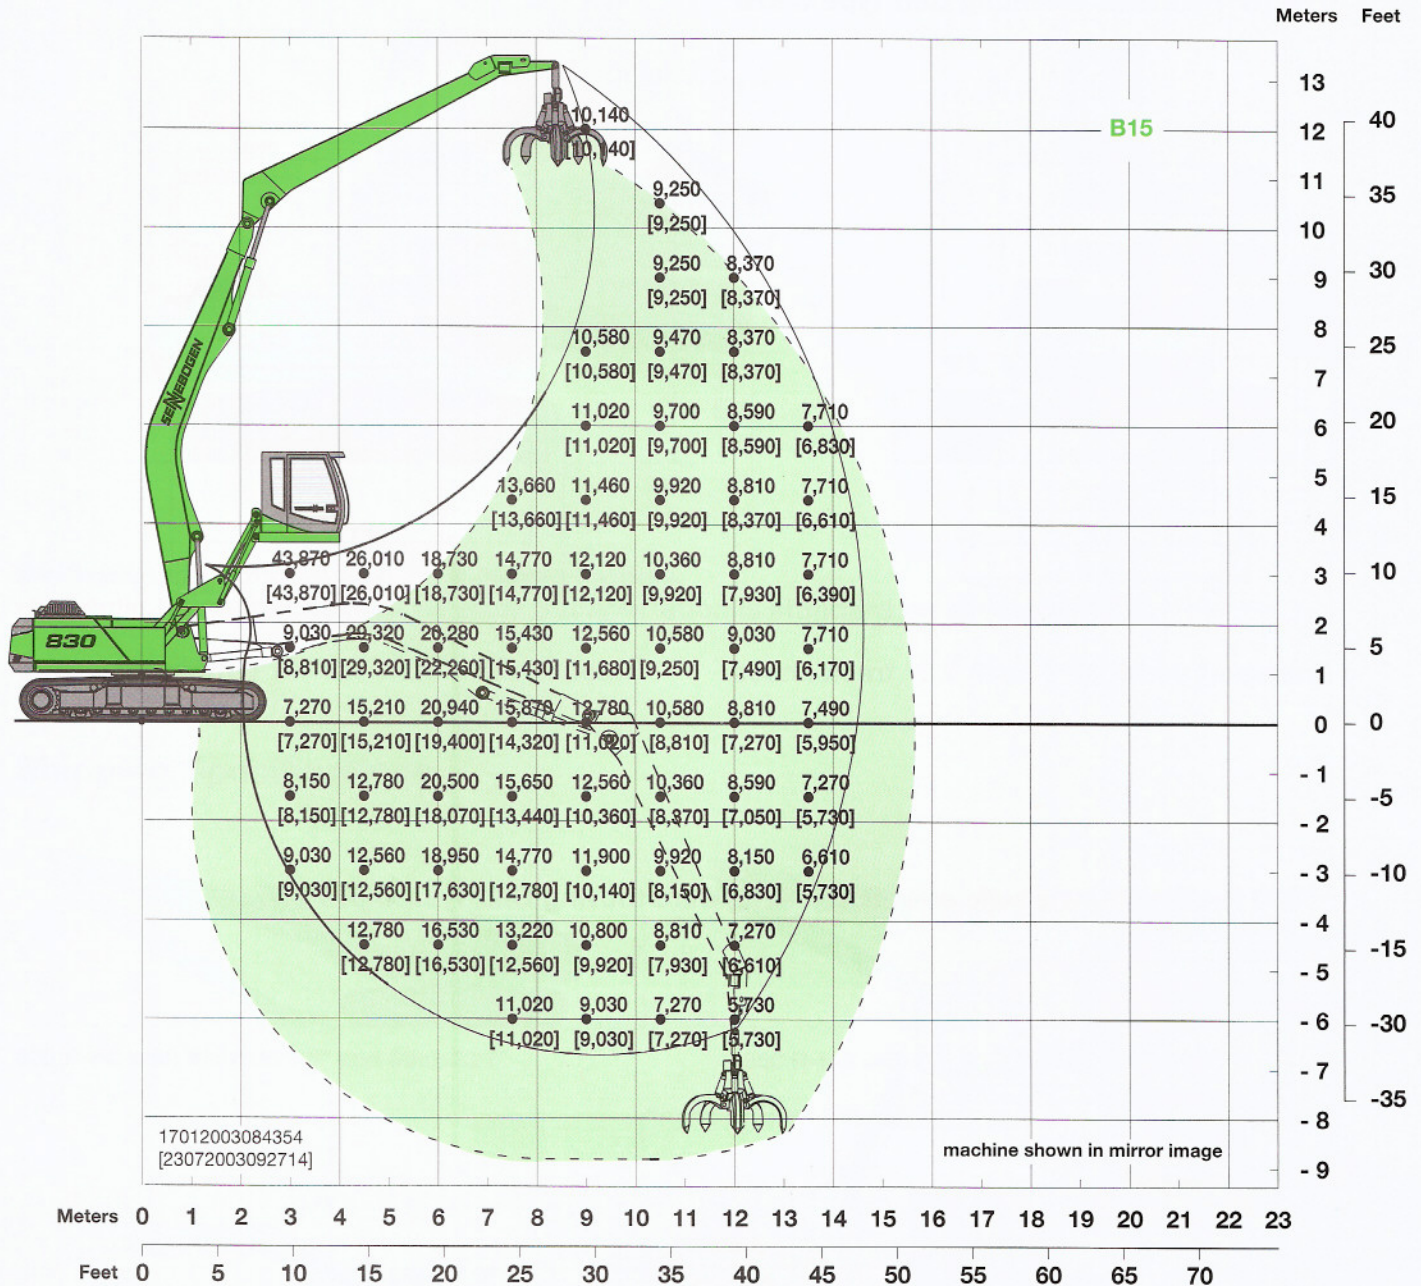


830 R-HD

- Undercarriage: Mechanically extendable wide gauge or optional hydraulically extendable undercarriage with crawler B60, crawler length 16'9"
- Boom: 27'10" banana type
- Stick: 23'7"
- Cab: C 300/260 hydraulic elevating and forward moving cab with operator's eye level 19'6"


Machine Specifications

- 830 R-HD with mechanically extendable wide gauge crawler undercarriage R20/370-280L, 8'10" hydraulic elevating Cab Type C 270

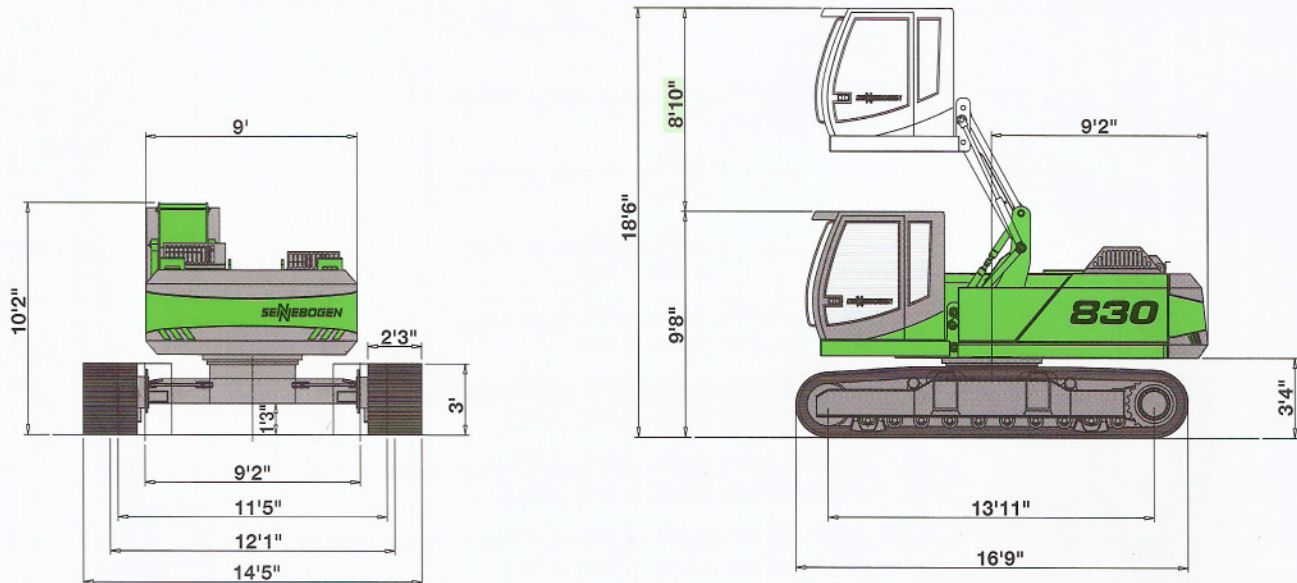


Transport width 12'1" with 2'3" track shoes

- 830 R-HD with hydraulic elevating and forward moving Cab Type C 300/260

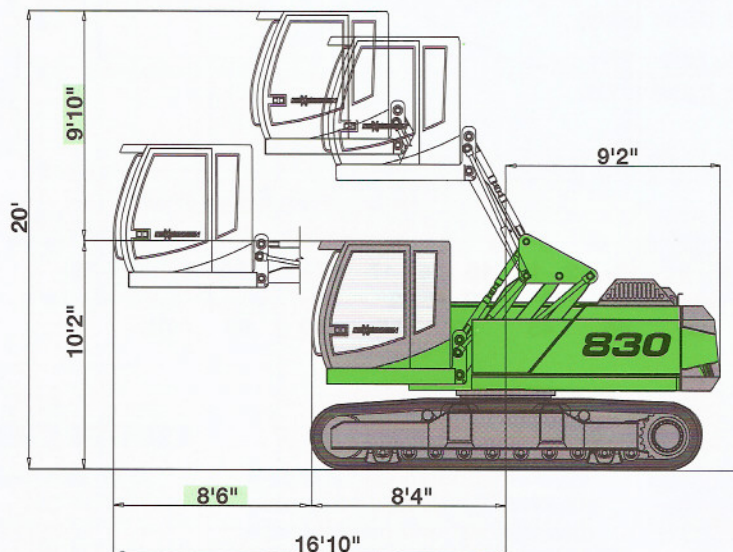

- 830 R-HD with hydraulically extendable crawler undercarriage T20/330L, fixed hi-rise cab 3'3"

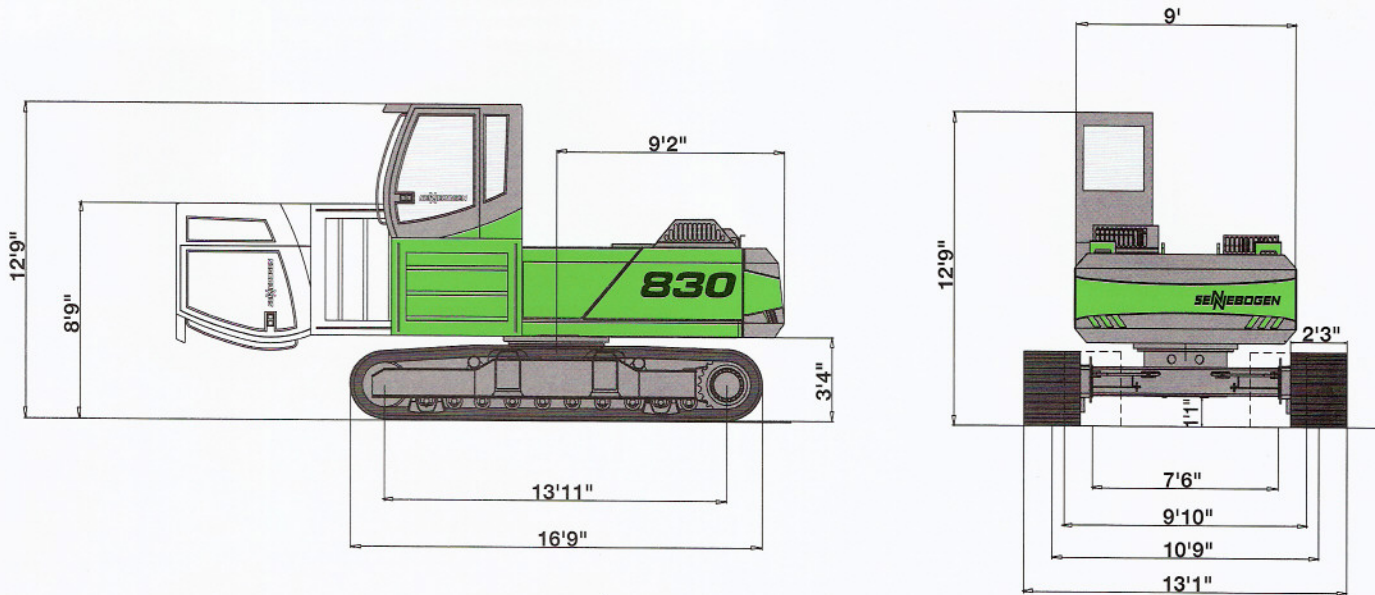


Available with optional 5', 6'7" or higher models.


Hydraulic tilting mechanism for easy transportation is standard on all hi-rise cabs.

Transport width 9'10" with 2'3" track shoes.


Shipping Specifications

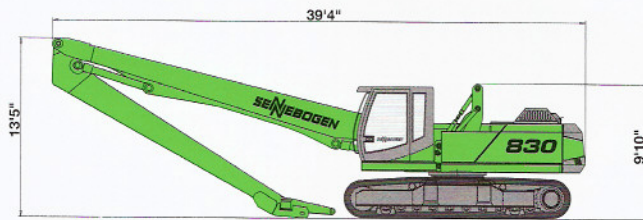


830 R-HD with Boom 27'10" and Stick 23'7"

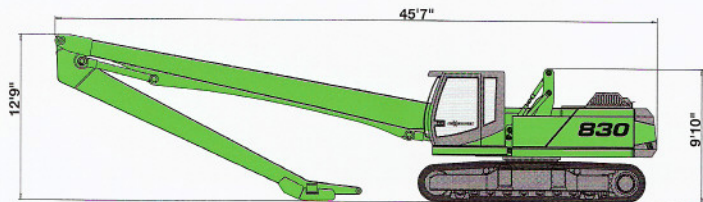

830 R-HD with Boom 32'10" and Stick 24'7"

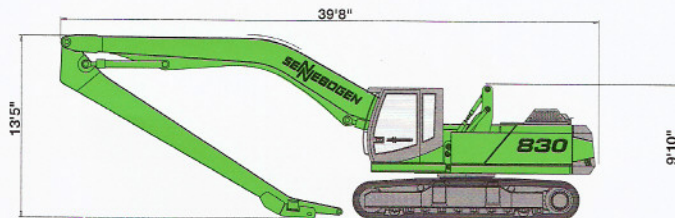

830 R-HD with Banana Boom 27'10" and Stick 23'7"

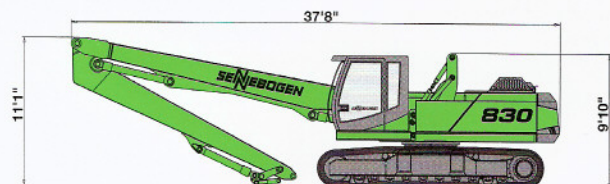

830 R-HD with Boom 24'3" and special Stick 18'8" with reversing mechanism

SENNEBOGEN

green line

830 R-HD




Comfortable F2000 operator's cab

- Advanced design, clear layout
- Low noise and vibration
- Excellent all-round visibility
- Fully adjustable air suspension seat, heated
- Heating and air conditioning with fresh / recirculation airflow and air filter


Serviceability

- The C Series machines offer a coarse particle separator at the front of engine cooler and air filter
- Ease of access for air filter and battery maintenance
- Hydraulic oil cooler separated from radiator, mounted on the left side towards the back of the machine, hydraulically driven and easy to clean
- The radiator fan is reversible and controlled from the cab, allowing the driver to clean out any debris from the radiator compartment

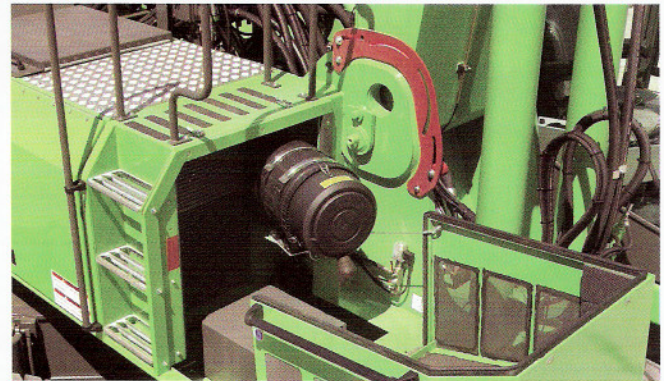

Large engine compartment

- Powerful water-cooled Deutz diesel engine longitudinally mounted for ease of access
- Daily service conveniently and easily performed from ground level
- Large access door with gas shocks provide easy access to engine compartment

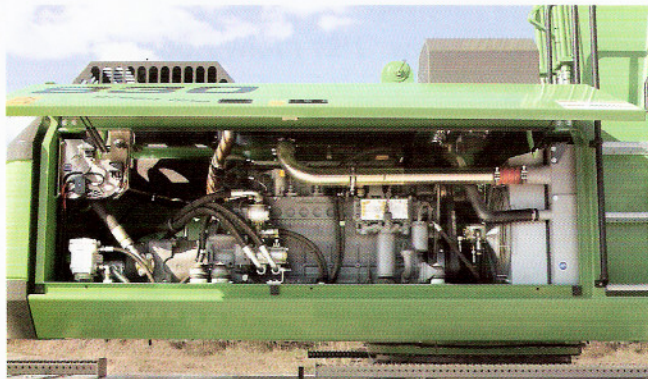

Left side compartment holds key components

- Diesel tank
- Electrical box with all fuses and relays for easy access and centralized electrical maintenance
- Central lubrication system
- Centralized pressure test ports for trouble shooting of all working functions



SENNEBOGEN LLC
2835 Jeff Adams Drive, Suite H
Charlotte, NC 28206

Telephone (Toll Free) 1-877-309-0099

Fax: 704-347-8894

E-Mail: sales@sennebogen-na.com

Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations shown may include optional equipment.

www.sennebogen-na.com