USED ON

# AICHI

## ELECTRONIC JOYSTICKS

Single-axis

Used on SV06, 08CNL, SV2032/263, TZ12A/ITZ40A

**REF 150TA9746**

Single-axis

Used on SR21A, SP12-400C/ SP14-460CJ, SP12C/SP14C, SR18, 21A(J)/ISR60, 70(J)

**REF 150TA9747**

Single-axis

Used on SR14CJ, SR21A, SR14C, SR12C, SR12-400C/SR14-460CJ

**REF 150TA9745**

Single-axis

Used on SR123/ISR403, RZ150/ IRZ500, SR182/ISR602, SR210/ ISR700, SR182, SR123, RZ090

**REF 145TA3097**

Single-axis

Used on SR12B, ISR40B, SR12B(J), ISR40B(J)

**REF 150TA9743**

## BELLOWS

- Biggest inner diameter top: 6,5 mm
- Biggest inner diameter bottom: 32 mm
- Height: 34 mm

Used on SR21A, SP12-400C/ SP14-460CJ, SP12C/SP14C, SR18, 21A(J)/ISR60, 70(J)

**REF 150TA9654**

- Biggest inner diameter top: 7 mm
- Biggest inner diameter bottom: 32 mm
- Height: 33,5 mm

Used on SR21A, SV06C/SV08C, SP18A/SP21A(J)/SP25B, SR18, 21A(J), SV06CNL/SV08CNL

**REF 150TA9653**

## PRINTED CIRCUIT BOARDS

Interface card

Used on SR123/ISR403, SR182/ISR602

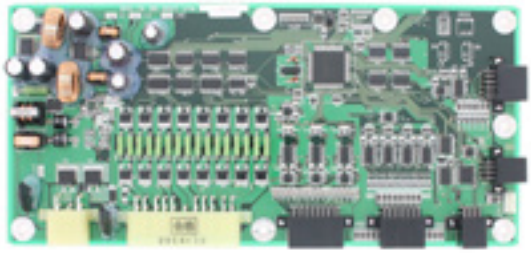

Controller

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SR18, 21A(J)

**Although these electronic cards may resemble the one fitted on your mobile elevating work platform there can be a big difference. Therefore we always ask you to supply us with part number or full vehicle details before ordering a similar unit.**

**This is just a small selection of our electronic boards. For all other types, please feel free to call us!**

## BACK-UP ALARM

- Voltage: 12–24 V
- Volume: 85 dB
- Conformity: not approved
- Dimensions: 45,5 x Ø 46,2 mm

Used on SR21A, SR210, SR18, 21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SP25A/ISP830, SP25A

**REF 126TA6161**

## CABLE LOOMS

- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 32 m
- Number of plugs: 5

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SR18, 21A(J), SP18, 21A(J)/ISP60, 70(J), SP18A(J)/SP21A(J)/SP2

**REF 165TA3832**

- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 32,2 m
- Number of plugs: 5

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SR18, 21A(J), SP18, 21A(J)/ISP60, 70(J), SP18A(J)/SP21A(J)/SP2

**REF 165TA3834**

- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 9,1 m
- Number of plugs: 6

Used on SV60CNL/SV08CNL

**REF 165TA3833**

- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 18,65 m
- Number of plugs: 4

Used on SR12B(J)/ISR40B(J)

**REF 150TA9790**

- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 18,44 m
- Number of plugs: 7

Used on SR123/ISR403

**REF 150TA9788**

- Cable type: cables < 6 mm²
- Type of loom: multiple cables
- Total length: 18 m
- Number of plugs: 6

**REF 150TA9789**

- Cable type: < 6 mm²
- Type of loom: multiple cables
- Total length: 25,5 m
- Number of plugs: 6

Used on SR182/ISR602, SR182

**REF 150TA9787**

- Cable type: < 6 mm²
- Type of loom: multiple cables
- Total length: 25,86 m
- Number of plugs: 7

Used on SR182/ISR602

**REF 150TA9786**

## CONTACTOR

- Voltage: 24 V
- Maximum current interrupted: 100 A
- Maximum current uninterrupted: 100 A
- Magnetic blowouts: no
- Dust cover: enclosed version

Used on SR123/ISR403, RZ150/IRZ500, SR210/ISR700, SR182/ISR602, SR123J/ISR403J

**REF 165TA3835**

## RELAYS

Voltage: 24 V

Used on SR18, 21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J), SR18, 21A(J)

**REF 150TA9645**

Voltage: 24 V

Used on SR21A, SV06C/SV08C, SR18, 21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J), SR18, 21A(J)

**REF 131TA2686**

Voltage: 24 V

Used on SR123/ISR403, SR123J/ISR403J, RZ090

**REF 165TA2432**

Voltage: 24 V

Used on SR123/ISR403, SR123J/ISR403J

**REF 150TA9644**

## DASHBOARD WARNING LIGHTS

Built-in diameter: 11 mm

Used on SR21A, SV06C/SV08C, SR12B(J)/ISR40B(J), TZ12A/ITZ40A, TZ15B/ITZ50B

**REF 150TA9587**

Lens colour: green

Used on SV06, 08CNL/SV2032, 263, SV06C/SV08C, SV06CNL/SV08CNL

**REF 165TA3836**

## CONTROL PANEL HOUSING

- Length: 220 mm
- Width: 225 mm
- Height: 120 mm

Used on SV06C/SV08C, SV06CNL/SV08CNL

**REF 150TA9631**

## PROTECTIVE COVER

- Length: 216 mm
- Width: 125 mm
- Height: 176 mm

Used on SV06CNL, SV08CNL, SV06C, SV08C

**REF 150TA9744**

## SERVOMOTOR

- Voltage: 24 VDC
- Length: 140 mm
- Width: 120 mm
- Height: 150 mm

**REF 150TA9552**

## ELECTRIC MOTOR

- Minimum voltage: 12 VDC
- Total length: 140 mm
- Diameter: 106 mm
- Cable length: 690 mm

Used on SR12B(J)/ISR40B(J)

**REF 150TA9593**

## LINEAR ACCELERATOR

Dimensions: 215 x 88 x 50 mm

**REF 165TA3837**

## KEY SWITCHES

- Number of positions: 5
- Built-in diameter: 22 mm
- With key number: K30

Used on SR21A, SR18, 21A(J)/ISR60, 70(J), SP18, 21A(J)/ISP60, 70(J), SR18, 21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J)/SP2, SP25A/ISP830

**REF 110TA7785**

**Spare part key**

**REF 110TA3109**

- Number of positions: 3
- Built-in diameter: 22 mm
- With key number: 6896

Used on SR12-400C/SR14-460CJ, SV06C/SV08C, SP12V/SP14C, SV06-08CNL/SV2032-263, SR14CJ, SR14C, SR12C

**REF 150TA9633**

**Spare part key**

**REF 141TA2679**

## EMERGENCY SWITCH

- Built-in diameter: 22 mm
- Current: 10 A
- Voltage: 600 VAC
- NC contact

Used on SP25A/ISP830, SR12B(J)/ISR40B(J), SP350, SR123/ISR403

**REF 146TA4839**

## LIMIT SWITCHES

- Number of NO contacts: 4
- Number of NC contacts: 2
- Current: 5 A

Used on SR182/ISR602, SR210/ISR700, SR123/ISR403, RZ090

**REF 146TA8300**

- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 2 A

Used on SR14CJ, SR21A, SR14C, SR12C, SR12-400C/SR14-460CJ, SV06C/SV08C, SP12C/SP14C, SP18A/SP21A(J)/SP25B

**REF 146TA8337**

- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 2 A

Used on SR14CJ, SR14C, SR12C, SR12-400C/SR14-460CJ

**REF 146TA8340**

- Number of NO contacts: 1
- Number of NC contacts: 1
- Current: 3 A

Used on SR123/ISR403, RZ150/IRZ500, RZ150, SR210/ISR700, SR182/ISR602, RV093/IRV303-90, RV123/IRV403-90

**REF 127TA2381**

## TOGGLE SWITCHES

| | Position | Number of connections | Voltage V | Current A | Used on | REF |
|---|---|---|---|---|---|---|
| | On–off–on | 3 | 125/250 | 6 | SV06C/SV08C, SV06CNL/SV08CNL, SR123, SR182, SV06-08CNL/SV2032-263 | 146TA8322 |
| | On–on | 3 | 125/250 | 6 | SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SV06C/SV08C, SP12C/SP14C, SR210, SR18-21A(J)/ISR60-70(J) | 146TA8323 |
| | On–off–on | 3 | 125/250 | 6 | SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SR210, SR18-21A(J)/ISR60-70(J), SP18A/SP21A(J)/SP25B | 146TA8324 |
| | On–off–on | 3 | 125/250 | 6 | SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SP12-400C/SP14-460CJ, SV06C/SV08C, SP12C/SP14C | 146TA8325 |
| | On–off–on | 6 | 125/250 | 6 | SR14CJ, SR21A, SR12C, SR12-400C, SR14-460CJ, SP12-400C/SP14-460CJ, SR210, SP12C/SP14C | 146TA8328 |

## SPECIAL NUT

Used on SR14CJ, SR21A, SR14C, SR12C, SV06C/SV08C, SP12C/SP14C, SR18-21A(J)/ISR60-70(J), SP18A/SP21A(J)/SP25B

**REF 150TA9719**

## RUBBER CAP

- Diameter: 16 mm
- Height: 13 mm

Used on SR210, SR12B(J)/ISR40B(J), SR123/ISR403

**REF 150TA9655**

## FOOT SWITCHES

Used on SR123/ISR403, RZ150/IRZ500, SR210/ISR700

**REF 146TA8356**

Used on SR21A, SR12-400C/SR14-460CJ, SP18, 21A(J)/ISP60, 70(J), SP12C/14C, SP25A/ISP830, SP25A, SP350

**REF 146TA9481**

Foot switch cover

Used on SR210, SP25A/ISP830, SP25A, SR12B(J)/ISR40B(J), RZ150, SR210/ISR700, RZ090, RV123/IRV403-90

**REF 150TA9676**

## BUTTONS

- NO contact
- Current: 10 A
- Voltage: 600 V

Used on SR14CJ, SR21A, SR12C, SR12-400C/SR14-460CJ, SR18, 21A(J)/ISR60, 70(J)

**REF 146TA8330**

- NO contact
- Current: 10 A
- Voltage: 600 V

Used on SR210, SR123/ISR403, RZ150/IRZ500, RZ150, SR210/ISR700, SR182/ISR602, SR123/ISR403J

**REF 146TA8331**

## SWITCH

Single-axis

Used on SV06CNL, SV08CNL

**REF 165TA3838**

## PROXIMITY SENSORS

- Height: 93 mm
- Length: 150 mm
- Voltage: 24 VDC
- Switch type: stroke sensor

Used on SP18, 21A(J)/ISP60, 70(J), TZ12A/ITZ40A, TZ15B/ITZ50B, SR21A, SR18A/SP21A(J)/SP2, SR18(J)/SR21A(J)

**REF 150TA9640**

- Height: 150 mm
- Length: 150 mm
- Voltage: 24 VDC
- Switch type: distance sensor

Used on SR12A, SP18A/SP21A(J) SP25B, SP18-21A(J)/ISP60-70, SR18-21A(J), SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

**REF 150TA9670**

## TILT SENSOR

- Dimensions: 52,5 x 48 mm
- Detection: 5°
- Switch type: angle sensor

Used on SR21A, SR12-400C/SR14-460CJ, SP18, 21A(J)/ISP60, 70(J), SP12C/14C, SP25A/ISP830, SP350, RZ150/IRZ500, SR123/ISR403

**REF 150TA9671**

## LENGTH SENSORS

- Housing diameter: 180 mm
- Number of pins: 4
- Switch type: length sensor

Used on SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

**REF 165TA3839**

- Housing diameter: 160 mm
- Number of pins: 4
- Switch type: length sensor

Used on SP18, 21A(J)/ISP60, 70(J), SP25A/ISP830, SP25A, SP350, SP350/ISP1150, SR18, 21A(J)/ISR60, 70(J)

**REF 150TA9642**

## ANGLE SENSOR

- Diameter shaft: 6 mm
- Cable length: 205 mm
- Number of pins: 3

Used on SR21A, SP18A/SP21A(J)/SP25B, SR18, 21(J), TZ12A/ITZ40A, TZ16, 20A/ITZ52, 65A, SP18, 21A(J)/SP2

**REF 150TA9641**

## HOUR METER

- Voltage: 12–60 VDC
- Depth: 23,8 mm
- Width: 35,4 mm
- Length: 54 mm

Used on SR14CJ, SR21A, SR12C, SR12-400C/ SR14-460CJ, SP12C/SP14C

**REF 112TA4854**

## HYDRAULIC MOTOR

**Type of flange**

Type A




**Type of shaft**

Type F




- Thread connections: ½" BSP
- Type of flange: A
- Type of shaft: F
- Total length: 190 mm

Used on SR210, SR182/ISR602, SR210/ISR700, SR182, SR123/ISR403, SR123/ISR403J

**REF 150TA9739**

## HYDRAULIC PUMPS

- Total length: 313 mm
- Neck diameter: 101,5 mm
- Direction of rotation: CW
- Material of the housing: metal

Used on SR182/ISR602, SR182

**REF 150TA9742**

- Total length: 332,5 mm
- Neck diameter: 101,6 mm
- Direction of rotation: CW
- Material of the housing: metal

Used on SR210, RZ150/IRZ500, SE210/ISR700

**REF 150TA9741**

- Total length: 265 mm
- Neck diameter: 82,5 mm
- Direction of rotation: CW
- Material of the housing: metal

Used on SR123/ISR403, RZ090, SR123J/ISR403J

**REF 150TA9740**

## HYDRAULIC PUMP GROUPS

- Relais: 24 VDC
- Electric motor: 1,7 kW

Used on ISR60/70, SR18A(j)/SR21A, SP18A/SP21A(j), SP25B, SP25A, SP350, TZ12A, TZ16, TZ20A, TZ15B

**REF 150TA9737**

- Relais: 12 VDC
- Electric motor: 0,9 kW

Used on SR12/400C, SR14/460C, SR12C, SR14C, SR14CJ, SP12C, SP14C

**REF 165TA3840**

## PRESSURE VALVES (FLOW)

- Thread: M30 x 1,5 mm
- Length: 124 mm

Used on SR123/ISR403, RZ090, SR123J/ISR403J

**REF 150TA9690**

- Valve code: 26560-25001
- Length: 160 mm

Used on SR210, SP25A/ISP830, SP25A/ISP830, SR182/ISR602, SR210/ISR700, SP350/ISP1150

**REF 165TA3844**

## CONTROL VALVE

Dimensions: 123 x 99 mm

Used on SR12B(J)/ISR40B5(J)

**REF 165TA3842**

## SOLENOID VALVES

Length: 112,5 mm

Used on SR210, SR123/ISR403, SR210/ISR700, SR182/ISR602, RV093-123/IRV303-403-90

**REF 165TA3841**

Length: 135 mm

Used on SR21A, SR18-21A(J)/ISR60-70(J), SR18-21A(J), SP18-21A(J)/ISR60-70(J)

**REF 165TA3843**

## CARTRIDGES WITH COIL

Length: 212 mm

Used on SP18A/SP21A(J)/ SP25B, SR18-21A(J), SR18-21A(J)/ISR60-70(J)

**REF 150TA9597**

Length: 213 mm

**REF 150TA9596**

**Cartridges exist in a variety of dimensions and wiring diagrams. When placing an order, always provide the necessary info with regard to the wiring diagram, as cartridges may have identical dimensions yet be connected in different ways.**

## COIL

- Height: 52 mm
- Diameter: 16,1 mm
- Voltage: 12 V
- Resistance: 11,8 Ω

Used on SR14CJ, SR14C, SR12C

**REF 165TA3845**

## GEAR

- Outer diameter: 164 mm
- Total height: 112,8 mm
- Number of teeth: 30

Used on SR210, SP25A/ISP830, SP25A, SP350, SR123/ISR403, SR182/ISR602, SR210/ISR700, SR182, SR123J/ISR403J

**REF 165TA3847**

## HYDRAULIC HOSES

- Length: 715 mm
- Pressure: 175 bar

**REF 150TA9735**

- Length: 15 620 mm
- Pressure: 155 bar

Used on SR21A, SR18-21A(J)/ISR60-70(J), SR18-21A(J), SP18-21A(J)/SP2, SP18-21A(J)/ISP60-70(J)

**REF 165TA3846**

## SYNFLEX HOSES

- Hydraulic hose
- Length: 13,4 m
- Pressure: 210 bar
- Coupling: 2 x 1/4" BSP

Used on SR14J, SR14C, SR12C

**REF 150TA9736**

- Hydraulic hose
- Length: 7,5 m
- Pressure: 210 bar
- Coupling: 2 x 1/4" BSP

Used on SR123/ISR403, SR123

**REF 165TA3850**

## GLASS LEVEL GAUGE

- Length: 102 mm
- Width: 20 mm
- Without thermometer

Used on SR210, SR123/ISR403, RZ150/IRZ500, RZ150, RZ090, SR182/ISR602

**REF 165TA3848**

## GREASE NIPPLE

- Total height: 76 mm
- Key width: 17 mm
- Thread: M16 x 1,5 mm

Used on SR12B(J)/ISR40B(J)

**REF 165TA3851**

## FITTING FOR HYDRAULIC CIRCUIT

Hydraulic fitting: 1/2" BSP

**REF 150TA9599**

## PINION SHAFT

- Outer diameter: 70 mm
- Total height: 240 mm
- Number of teeth: 17

Used on SR21A, SR18, 21A(J)/ ISR60, 70(J), SP18, 21A(J)/ ISP60, 70(J), SR18, 21A(J)

**REF 165TA3849**

## FILLER CAP

- Height: 30 mm
- Outer diameter: 97,5 mm
- Inner diameter: 60 mm

Used on SR21A, SP18A/ ST21A(J)/SP25B, SR18, 21A(J), SR18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

**REF 150TA9784**

## MUFFLER

- Total length: 430 mm
- Diameter body: 225 mm
- Outer diameter smallest tube: 55 mm
- Outer diameter biggest tube: 61 mm

Used on SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

**REF 165TA3852**

## EXHAUST PIPE

- Length: 185 mm
- Outer diameter smallest tube: 43 mm
- Outer diameter biggest tube: 43 mm

Used on SP18A(J)/SP21A(J)/SP2, SR18A(J)/SR21A(J)

**REF 165TA3855**

## FUEL PUMP

- Voltage: 24 V
- Total height: 97 mm
- Centre distance: 66 mm
- Number of holes: 2

Used on SR18A, 21A(J)/ISR60, 70(J)

**REF 165TA3853**

## TIMING BELT SET

- Number of teeth: 91
- Dimensions: 72 x 33 mm

**REF 151TA2356**

## ENGINE STOP COIL

- Voltage: 24 V
- Type of current: DC
- Function: pull
- Mounting side: both sides
- Length: 146 mm

Used on SR123/ISR403, RZ090, SR123J/ISR403J

**REF 165TA3854**

## ALTERNATORS

- Voltage: 24 V
- Current: 15 A
- Centre distance: 155 mm

**REF 103TA3638**

- Voltage: 24 V
- Current: 20 A
- Centre distance: 148 mm

**REF 165TA3856**

## STARTERS

- Voltage: 24 V
- Power: 3,5 kW
- Number of teeth: 9

**REF 165TA3857**

- Voltage: 24 V
- Power: 4,5 kW
- Number of teeth: 9

**REF 165TA3858**

## DOOR HANDLE

- Length: 54 mm
- Width: 45 mm

Used on SR123/ISR403, RZ090, SR123, ST123J/ISR403J

**REF 150TA9749**

## WEAR PADS

| | Length mm | Material | Used on | REF |
|---|---|---|---|---|
|  | 42,5 | Plastic | SR210, RZ150, RZ150/RZ500, SR210/ISR700, SR182/ ISR602,SR182 | 150TA9619 |
| | 43 | Plastic | SR123/ISR403, RZ090, SR123J/ISR403J, SR123 | 150TA9621 |
| | 60 | Plastic | SR18,21A/(J)/ISR60,70(J), SR18, 21A(J), SP18, 21A(J)/ ISP60, 70(J) | 150TA9622 |
| | 80 | Plastic | SR123/ISR403, RZ090, SR123/ ISR403-90, SR123 | 150TA9700 |
| | 100 | Plastic | SR210, SP350, RZ150, RZ150/ IRZ500, SR182/ISR602, SR210/ISR700 | 150TA9617 |

## WEAR PADS

| | Length mm | Material | Used on | REF |
|---|---|---|---|---|
| | 100 | Plastic | SR21A, SR18,21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B | 150TA9613 |
| | 100 | Plastic | SR210, RZ150/IRZ500, SR210/ ISR700, SR182/ISR602, SR182 | 150TA9699 |
| | 100 | Plastic | SR210, SRZ150/IRZ500, RZ150, SR182/ISR602, SR210/ ISR700, SR182 | 150TA9624 |
| | 150 | Plastic | SR123/ISR403, SR123J/ ISR403J, RZ090, SR123 | 150TA9612 |
| | 185 | Plastic | SR21A, SR18,21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SR18, 21A(J) | 150TA9703 |

## CABLE GUIDE

- Outside dimensions: 95 x 48 mm
- Inside dimensions: 76 x 35 mm
- Material: plastic
- Quantity of links: 142

Used on SR14CJ, SR12C

**REF 165TA3859**

## UPRIGHT PARTS

- Length: 153 mm
- Width: 34 mm
- Height: 83 mm

Used on SP12-400C/SP14-460CJ

**REF 165TA3860**

- Diameter: 80 mm
- Height: 9 mm

Used on SR18-21A(J)/ ISR60-70(J), SP18-21A(J)/ ISR60-70(J), SR12B(J)/ISR40B(J)

**REF 150TA9678**

## CHASSIS ACCESSORY

- Length: 680 mm
- Height: 430 mm

Used on SV06CNL/SV08CNL

**REF 165TA3862**

## SUPPORTS – PIECES OF CONNECTIONS

- Number of holes: 2
- Material: cast iron

Used on SR123/ISR403, RZ090

**REF 150TA9610**

- Number of holes: 4
- Material: metal

Used on SP25A/ISP830, SP25A, SP350, SR123/ISR403, SP350/ ISP1150, SR123J/ISR403J

**REF 150TA9683**

- Number of holes: 4
- Material: metal

Used on SR21A, SR18-21A(J)/ ISR60-70(J), SP18-21A(J)/ SP25B, SR18-21A(J)

**REF 165TA3861**

- Number of holes: 4
- Material: metal

Used on, SR18-21A(J)/ ISR60-70(J), SP18-21A(J)/ ISR60-70(J), SR21A, SR12B(J)/ ISR40B(J), SP18-21A(J)/SP25B

**REF 150TA9684**

## HINGES

- Length: 48 mm
- Width: 40 mm
- Height: 20 mm
- Diameter of the holes: 5 x 12 mm

Used on SR14CJ, SR12A, SR210, SR18-21A(J)/ISR60, 70(J), SR18-21A(J), SP25A/ISP830

**REF 150TA9750**

- Length: 60 mm
- Width: 40 mm
- Height: 10,5 mm
- Diameter of the holes: 6 x 4,3 mm

Used on SR12B(J)/ISR40B(J)

**REF 150TA9752**

## COVER

- Total length: 8,2 mm
- Inner diameter: 70 mm
- Outer diameter: 140 mm

Used on SR210, SR123/ISR403, SR182/ISR602, SR210/ISR700, SR182

**REF 150TA9591**

## BALL SCREW

- Total length: 179 mm
- Diameter shaft: 50 mm
- Length of the screw: 70 mm

Used on SR210, SR123/ISR403, SR182

**REF 150TA9686**

## HOSE REEL SHEAVE

- Inner diameter: 15,4 mm
- Outer diameter: 45 mm
- Width: 16,8 mm
- Material: plastic

Used on SR21A, SP18A/SP21A(J)/SP25B, SR18, 21A(J), SP18, 21A(J)/ISP60, 70(J), TZ16, 20A/ITZ25-65A

**REF 165TA3863**

## STEEL CABLES



- Total length: 4225 mm
- Diameter: 8,3 mm

Used on SR123/ISR403, SR123, SR 123J/ISR403J

**REF 150TA9765**

- Total length: 8100 mm
- Diameter: 12,3 mm

Used on SR123/ISR403, SR123, SR 123J/ISR403J

**REF 150TA9764**

- Total length: 8320 mm
- Diameter: 12,3 mm

Used on SR12B(J)/ISR40B(J)

**REF 165TA3864**

## GAS SPRING

- Type of spring: push type
- Centre distance: 670 mm

Used on SR210, SE12B(J)/ISR403, RZ150, SR210/ISR700, SR182/ISR602, RZ090

**REF 150TA9706**

## DECALS

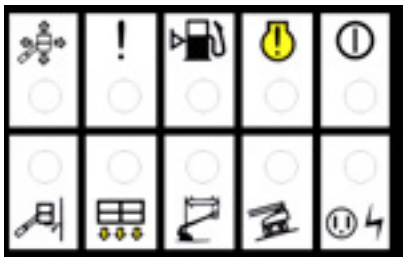

- Length: 101 mm
- Height: 64 mm

Used on SR14CJ, SR14C, SR12C, SP12-400C/SP14-460CJ

**REF 163TA3962**

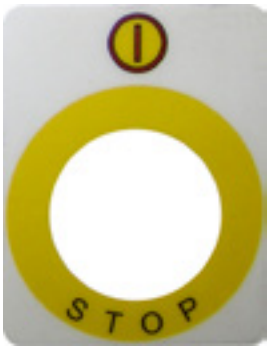


- Length: 70 mm
- Height: 90 mm

Used on SR21A, SP12C/SP14C, SR18-21A(J)/ISR60, 70(J), SP18A/SP21A(J)/SP25B, SR18, 21A(J)

**REF 138TA2576**

- Length: 440 mm
- Height: 32 mm

Used on SP18-21A(J)/SP60, 70(J), SP12C/SP14C, SP18-21A(J)/SP25B

**REF 138TA2883**

- Length: 440 mm
- Height: 32 mm

Used on SP18-21A(J)/SP60, 70(J), SP12C/SP14C, SP18-21A(J)/SP25B

**REF 165TA3865**

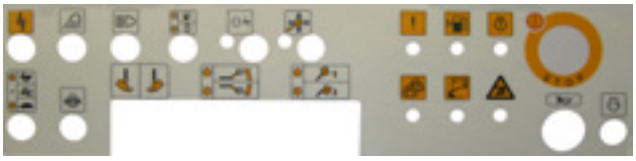

- Length: 535 mm
- Height: 133 mm

Used on SP18-21A(J)/SP60, 70(J), SP12C/SP14C, SP18-21A(J)/SP25B

**REF 138TA2884**



- Length: 206 mm
- Height: 200 mm

Used on SV06CNL/SV08CNL

**REF 138TA3335**

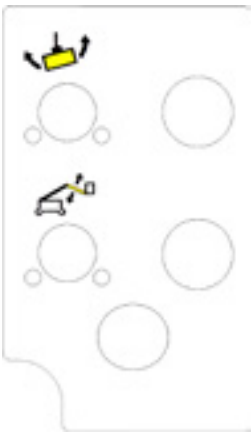

- Length: 95 mm
- Height: 161 mm

Used on SR14CJ, SR14C, SR12C, SP12-400C/SP14-460CJ

**REF 150TA9630**

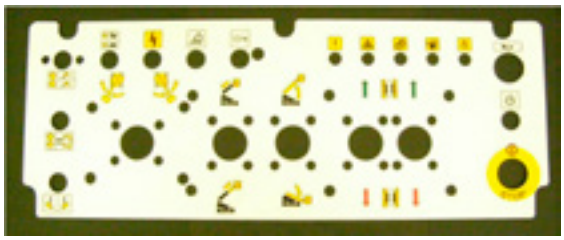

- Length: 590 mm
- Height: 224 mm

Used on SR12B(J)/ISR40B(J)

**REF 138TA1767**

## DECALS

- Length: 720 mm
- Height: 190 mm

Used on SR123/ISR403

**REF 150TA9794**

- Length: 534 mm
- Height: 133 mm

Used on SR21A, SR18-21A, SR18, 21A(J), SR18A(J)/ SR21A(J)

**REF 126TA9587**

- Length: 395 mm
- Height: 32 mm

Used on SR21A, SR18-21A, SR18, 21A(J), SR18A(J)/ SR21A(J)

**REF 126TA9589**

- Length: 395 mm
- Height: 32 mm

Used on SR21A, SR18-21A, SR18, 21A(J), SR18A(J)/ SR21A(J)

**REF 126TA9588**

## PNEUMATIC TYRE

- Skid steer tubeless pneumatic tyre
- Dimensions: 385 x 65 x 19,5

Used on SP18A-21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J)

**REF 165TA3868**

## TRACTION WHEEL

- Diameter wheel: 406 mm
- Number of bolt holes: 5
- Width wheel: 127 mm
- Shaft hole diameter: 95 mm

Used on SV06CNL/SV08CNL

**REF 150TA9693**

## ANTI-PUNCTURE TYRE

Used on SP18A-21A(J)/SP25B, SP18, 21A(J)/ISP60, 70(J)

**REF 165TA3869** – LH
**REF 165TA3870** – RH

## TRACK ROLLERS

| | Maximum diameter mm | Total width mm | Smallest centre distance between mounting holes mm | Largest centre distance between mounting holes mm | Used on | REF |
|---|---|---|---|---|---|---|
| | 76 | 183 | | | SR14CJ, SR14C, SR12C, SR12B(J)/ISR40B(J) | 143TA8888 |
| | 100 | 190 | 50 | 147 | SR12B(J)/ISR40B(J) | 165TA3866 |
| | 116 | 196 | 42 | 110 | SR12, SR210, SR18A/ SR21A, SR182, SR182/ ISR602, SR210/ISR700 | 165TA3867 |
| | 134 | 146 | | | SR12B(J)/ISR40B(J), SR14CJ, SR14C, SR12C | 143TA8869 |

## TRACK ROLLERS

| | Maximum diameter mm | Total width mm | Smallest centre distance between mounting holes mm | Largest centre distance between mounting holes mm | Used on | REF |
|---|---|---|---|---|---|---|
| | 134 | 193 | 51 | 150 | SR14CJ, SR14C, SR12C | 143TA8850 |
| | 135 | 176 | 50 | 148,3 | SR12B(J)/ISR40B(J) | 143TA8849 |
| | 158 | 235 | 90 | 204 | SR123/ISR403, RV093, SR123/IRV303, 403-90, RZ090, RV123/ IRV403-90, SR123 | 144TA6599 |
| | 164,5 | 278 | 102 | 239 | SR210, SR182, SR18A/ SR21A, SR182/ISR602, SR210/ISR700 | 143TA8566 |

## TRACK SPROCKETS

| | Number of teeth | Number of mounting holes | Inner diameter mm | Outer diameter mm | Used on | REF |
|---|---|---|---|---|---|---|
| | 19 | 9 | 230 | 429 | SR14CJ, SR14C, SR12C, SR12B(J)/ ISR40B(J) | 143TA9072 |
| | 21 | 15 | 325 | 603 | SR18A/SR21A | 143TA9013 |

## IDLER

- Total height: 600 mm
- Diameter of the wheel: 380 mm

Used on SR14CJ, SR14C, SR12C, SR12B(J)/ISR40B(J)

**REF 143TA9565**

## RUBBER TRACKS NON-MARKING

| | Colour | Width mm | Number of links | Pitch length mm | Type | REF |
|---|---|---|---|---|---|---|
| | White | 150 | 45 | 60 | X40RC, X40RC3 | 165TA3871 |
| | White | 200 | 42 | 72 | RV040, RV041, RM040 | 165TA3872 |
| | White | 200 | 56 | 72 | RV060, RV061, RX061 | 134TA8201 |

## TRACK PARTS

- Rubber clip-on pad for steel plate
- Width: 450 mm

**REF 165TA3873**

- Rubber clip-on pad for steel plate
- Width: 500 mm

**REF 152TA2180**

## UNDERCARRIAGE PART

- Total length: 190 mm
- Diameter mounting holes: 34,8 – 22 – 12,2 mm

Used on SR14CJ, SR14C, SR12C, SR12B(J)/ISR40B(J)

**REF 165TA3874**

NOTES