

SCATTRAK®

SKID STEER LOADERS

**2000D
2000DX**

SKID STEER LOADERS

High Performance

- ▶ 2000 lb. operating load capacity
- ▶ Servo transmission control for reduced lever effort, quieter operation
- ▶ High efficiency Perkins 86 hp diesel engine
- ▶ Powerful 19 GPM hydraulic pump for fast cycle times, more power to run optional attachments
- ▶ 2000DX offers 33 GPM pump for high flow auxiliary hydraulics
- ▶ In-line loader linkage for excellent bucket visibility
- ▶ Self-leveling bucket (lift only)

Easy Access

- ▶ Forward tilting ROPS/FOPS cab allows quick and easy access to engine/hydrostatic and hydraulic components
- ▶ Swing out tailgate, hinged top engine cover, lift out floor panel, and drive chain access plates for excellent access to all key components

Durable Design

- ▶ Welded unitized frame, modular axles, corrosion resistant pivot pins, rugged Quick-Attach system, sealed Teflon bushings and lubed-for-life universal joint

Operator Comfort

- ▶ Extra wide operator compartment
- ▶ Convenient hand and foot controls standard (wrist action controls optional)
- ▶ Easy entrance and exit (no center cylinder to step over)
- ▶ Easy to read gauge/warning light panel



2000D/2000DX



The 19 GPM hydraulic pump delivers plenty of power for optional attachments.



Ideal for construction, industrial, landscape and recycling applications.




A wide range of versatile attachments are available.

SCATTRAK[®]

SKID STEER LOADERS

2000D
2000DX

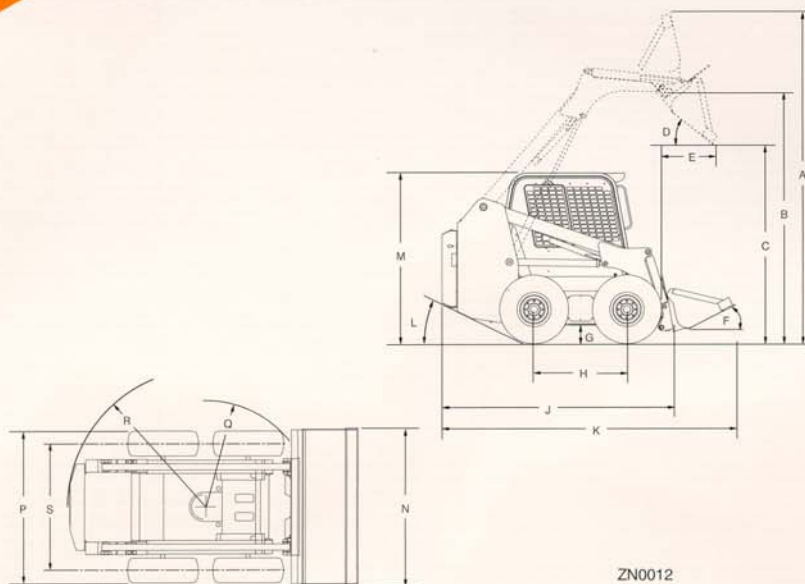

Dimensions

- A. Overall operating height
(with dirt bucket 72" [1829 mm])... 158.4" (4023 mm)
- B. Height to hinge pin... 121" (3073 mm)
- C. Dump height... 94.1" (2390 mm)
- D. Dump angle... 37°
- E. Dump reach... 24.2" (615 mm)
- F. Maximum roll back... 30°
- G. Ground clearance... 7.4" (188 mm)
- H. Wheelbase... 42.0" (1067 mm)
- J. Overall length
(less bucket)... 109.0" (2769 mm)
- K. Overall length
(with dirt bucket)... 137.8" (3500 mm)
- L. Angle of departure... 26°
- M. Overall height @ ROPS... 80.5" (2045 mm)
- N. Bucket width (inside dimension)... 72.0" (1829 mm)
- P. Clearance width (less bucket) —
8.25 x 15 tires... 69.3" (1760 mm)
12.00 x 16.5 tires... 71.8" (1824 mm)
14.00 x 17.5 tires... 75.8" (1925 mm)
33.00 x 15.5 x 16.5 tires... 80.4" (2042 mm)
- Q. Front clearance circle
(less bucket)... 51" (1295 mm)
- R. Rear clearance circle... 64" (1626 mm)
- S. Tread width... 59.5" (1511 mm)

Engine

Perkins 1004.42,
4 cylinder liquid cooled diesel,
86 hp (64 kW) @ 2400 rpm
Displacement... 258 cu in (4,2 liters)
Fuel tank capacity... 21.6 gal (81,7 liters)

Travel Speed

Travel range... 0-6.3 mph (0-10,1 km/h)

Operating Specs

Operating capacity... 2000 lb. (907 kg)
Tipping load... 4000 lb. (1814 kg)
Hydraulic pump flow rate... 19 GPM (71,9 liters/min)
High flow hydraulics (DX only)
@ 3000 psi... 33.0 GPM (124,9 liters/min)
Hydraulic reservoir capacity... 17.1 gal (64,7 liters)
*Approx. operating weight (D)... 6945 lb. (3150 kg)
*Approx. operating weight (DX)... 7045 lb. (3196 kg)
*Full fuel tank, 165 lb. (75 kg) operator, 72" (1829 mm) standard
capacity dirt bucket, 12.00 x 16.5 — 10-ply heavy duty tires

Standard Equipment

- ▶ Quick-Attach mounting frame
- ▶ Auxiliary hydraulics with flat face couplers
- ▶ Adjustable seat with 2" seat belt
- ▶ Operator restraint bar
- ▶ Dual travel/steering levers
- ▶ Tilt forward ROPS/FOPS cab
- ▶ Emergency exit rear window
- ▶ Mechanical park lock
- ▶ Loader arm service support
- ▶ Electronic loader arm lockout
- ▶ Hydraulic attachment self leveling (lift only)
- ▶ Dual element air cleaner
- ▶ Thermal start kit
- ▶ Back-up alarm
- ▶ 12.00 x 16.5 — 10-ply heavy duty flotation tires
- ▶ Lockable doors and covers
- ▶ Dual 12-Volt (525CCA) batteries
- ▶ Halogen work lights — two front/one rear
- ▶ 55 amp alternator
- ▶ Fuel gauge
- ▶ Hourmeter
- ▶ Warning light system
 - ▶ Engine water temperature, engine oil pressure and hydraulic oil temperature with audible alarm
 - ▶ Electrical charging system, transmission temperature, air filter restriction indicator, hydraulic filter bypass indicator and pre-heat indicator

Options

- ▶ 33.00 x 15.5 x 16.5 — 12-ply super wide flotation tires
- ▶ 8.25 x 15 non-pneumatic segmented tires
- ▶ 12.00 x 16.5 non-pneumatic segmented tires
- ▶ 8.00 x 16 non-pneumatic solid tires
- ▶ Over tire metal tracks
- ▶ 4-point lift hooks
- ▶ Spark arresting muffler
- ▶ Engine block heater
- ▶ Hydraulic reservoir heater
- ▶ Dual 12-Volt (800CCA) heavy duty batteries
- ▶ Catalytic exhaust purifier
- ▶ Engine air intake pre-cleaner
- ▶ Top window
- ▶ Cab enclosure with heater, defroster and wiper
- ▶ Special applications front door
- ▶ Deluxe seat
- ▶ Amber strobe light
- ▶ Horn
- ▶ 3" seat belt
- ▶ Wrist action hand controls
- ▶ Engine automatic shutdown system



901 Sunset Road
Port Washington, Wisconsin 53074 USA
(262) 268-3250 Fax: (262) 284-1153
www.compact-technologies.com

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS THE STANDARD WARRANTY PERTAINING TO A PARTICULAR PRODUCT AND SALE. WE MAKE NO OTHER WARRANTY EXPRESSED OR IMPLIED.

The OmniQuip Family Includes:
**SKYTRAK[®], SNORKEL[®], LULL[®],
and SCATTRAK[®]**