


MOROOKA

Dimensions with rear tipping body

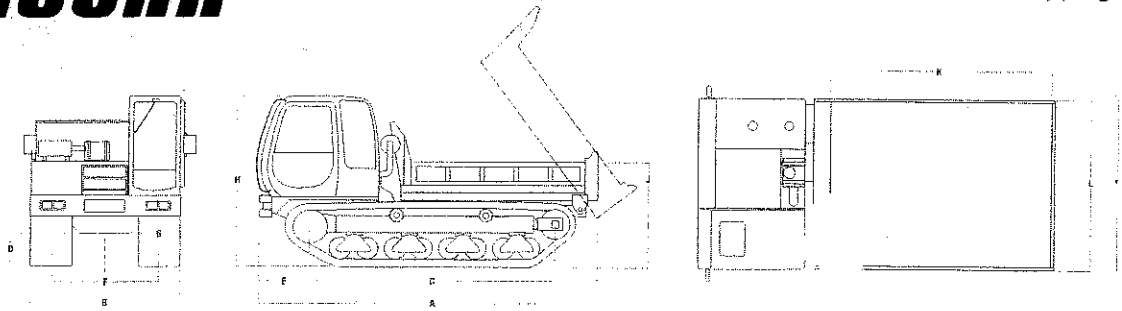

DIMENSIONS							
		300VD	600VD	800VD	1500VD	2200VD	3300VD
Full Length	`A` mm	3150	3750	4365	5000	5900	7170
Full Width	`B` mm	1600	1950	2300	2500	2850	3300
Wheelbase	`C` mm	1955	2950	3130	3870	3840	5105
Min. ground clearance	`D` mm	275	350	470	530	430	610
Front Overhang	`E` mm	630	590	636	450	1150	1160
Gauge	`F` mm	1280	1450	1700	1800	2050	2300
Track Width	`G` mm	350	500	600	700	800	1000
Vehicle Height	`H` mm	1780	2180	2343	2500	3000	3190
Loading Height	`I` mm	825	1050	1160	1320	1450	1660
Loading Box Height	`J` mm	370	350	350	400	400	560
Loading Box Length	`K` mm	1700	2150	2800	3100	3600	4700
Loading Box Width	`L` mm	1400	1700	1950	2200	2450	2600
ENGINE							
Manufacturer		Kubota	Mitsubishi	Mitsubishi	Mitsubishi	Hino	CUMMINS
Model		V2203KA	4D31-T	4D34-TE1	6D16-TE1	K13D-F	NTA855-C450
Displacement	cc	2197	3567	3807	7545	13267	14000
Power	ps/rpm	48/2800	72/2800	115/2800	204/2700	235/2200	450/2100
HYDRAULICS							
Drive System		HST	HST	HST	HST	HST	HST
Max. Hydraulic Press	kg/cm ²	250	286	355	355	350	350
Brake System		hydraulic	hydraulic	hydraulic	hydraulic	hydraulic	hydraulic
No. Of Gears		Low/high	Low/high	Low/high	Low/high	Low/high	Low/high
PERFORMANCE							
Machine Weight	kg	2200	4000	5890	8600	13000	20700
Max Carrying Capacity	kg	2500/3000	3300	4300	6300	11000	17000
Tank Capacity	litres	45	85	105	150	240	240
Speed In Low	km/h	6	6.6	8.3	7.6	8	8.6
Speed In High	km/h	9	11	12	11	12	12.1
Climbing Ability Empty	degrees	30	30	30	30	30	30
Ground Pressure Empty	kg/cm ²	0.16	0.18	0.16	0.16	0.22	0.17

CAUTRAC

The Causeway, Great Horkesley

Colchester, Essex CO6 4EJ

Tel: 01206 273111 Fax: 01206 273120

sales@cautracs.com

CAUTRAC

