





Service Engines and Accessories



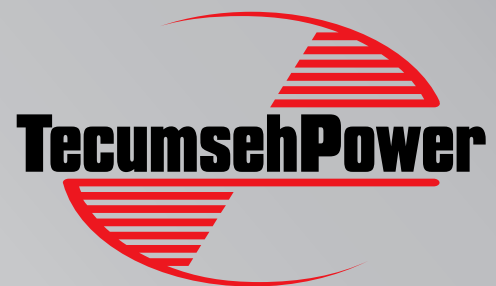


3.5 HORSEPOWER SMALL FRAME ROTARY LAWN MOWER/TRIMMER APPLICATIONS

MODEL	LEV80
HORSEPOWER	3.5 2.61 kW
BORE & STROKE	2.312 x 1.844 in. 58.73 x 46.84 mm
DISPLACEMENT	7.75 cu. in. 128 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	18.75 lbs. 8.5 kg
BOLT MTG. CIRCLE	8 in. 203 mm

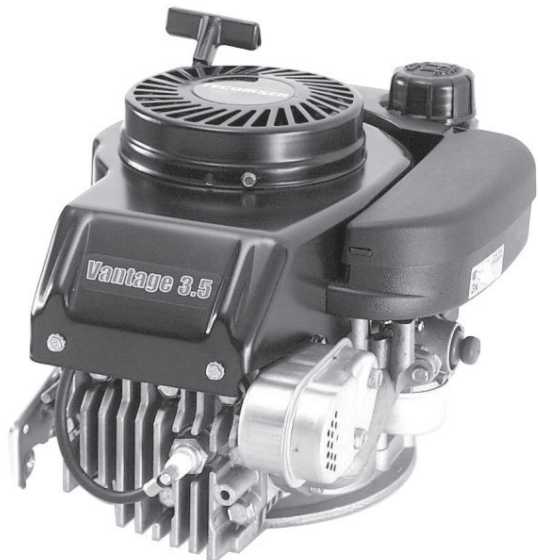

FEATURES

- Lightweight L-head design.
- Full pressure lubrication system keeps all critical areas supplied with oil for longer engine life.
- Aluminized muffler protects against rust and keeps engine quieter, longer.
- Mechanical governor for instant response to changing load conditions.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

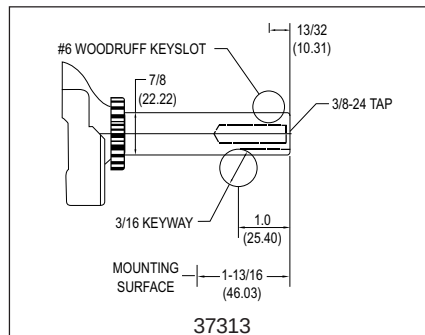

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Compliance Brake Service Part No.	Top Governed Speed	Note
804190	MTD	37313	Fixed Speed	37116/37117 (Poly) Ref. 1	Side & Bottom	1 qt. (.95 ltr.) Ref. 2	36559A (Reverse Pull)	3400	





3.5 - 4.5 HORSEPOWER SMALL FRAME ROTARY LAWN MOWER/TRIMMER APPLICATIONS

MODEL	LV148EA, LEV90
HORSEPOWER	3.5 - 4.5 2.61 - 3.36 kW
BORE & STROKE	2.50 x 1.844 in. 63.50 x 46.84 mm
DISPLACEMENT	9.03 cu. in. 148 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	18.75 lbs. 8.5 kg
BOLT MTG. CIRCLE	8 in. 203 mm

FEATURES

- Lightweight L-head design.
- Full pressure lubrication system keeps all critical areas supplied with oil for longer engine life.
- Aluminized muffler protects against rust and keeps engine quieter, longer.
- Mechanical governor for instant response to changing load conditions.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

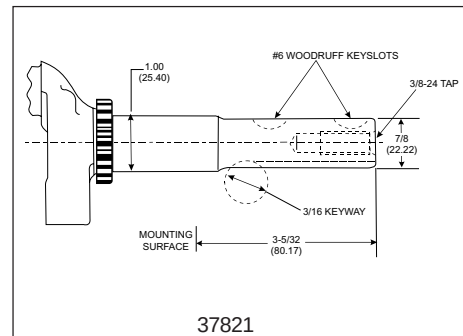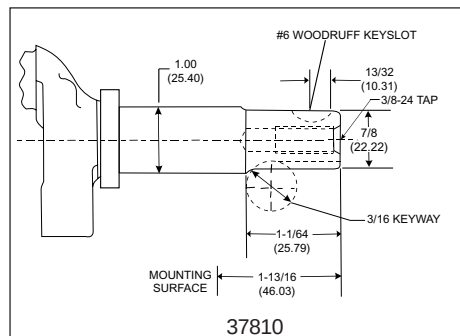

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Compliance Brake Service Part No.	Top Governed Speed	Note
804193	MTD	37810	Fixed Speed	35066 (Paper) Ref. 1	Side & Bottom	1.25 qt. (1.19 ltrs.) Ref. 2	36559A (Reverse Pull)	3200	
804220	MTD	37821	Fixed Speed	35066 (Paper) Ref. 1	Side & Bottom	1.25 qt. (1.19 ltrs.) Ref. 2	36559A (Reverse Pull)	3200	




6.0 HORSEPOWER SMALL FRAME ROTARY LAWN MOWER APPLICATION

MODEL	LEV105
HORSEPOWER	6.0 4.47 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.90 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	18.75 lbs. 8.5 kg
BOLT MTG. CIRCLE	8 in. 203 mm

FEATURES

- Lightweight L-head design.
- Patented Easy Start Performance (ESP) technology ensures easy starting.
- Full pressure lubrication system keeps all critical areas supplied with oil for longer engine life.
- Aluminized muffler protects against rust and keeps engine quieter, longer.
- Premium mechanical governor provides positive, instant response to changing load conditions.
- Automotive-style paper element air filter gives you superior engine performance and protection.
- High oil fill with automotive-type dipstick.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

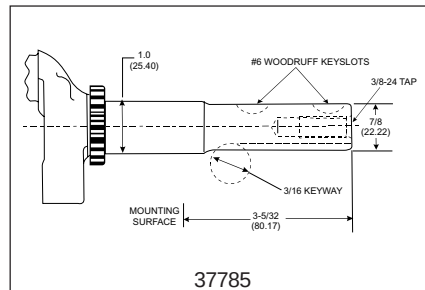

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Compliance Brake Service Part No.	Top Governed Speed	Note
805189	MTD	37785	Fixed Speed	36905 (Paper) Ref. 1	Side & Bottom	1 qt. (.95 ltr.) Ref. 2	36559A (Reverse Pull)	3300	

MTD shroud not included.





6.0 HORSEPOWER SMALL FRAME ROTARY LAWN MOWER APPLICATION

MODEL	LV195EA, LEV120
HORSEPOWER	6.0 4.47 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.90 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	18.75 lbs. 8.5 kg
BOLT MTG. CIRCLE	8 in. 203 mm



FEATURES

- ✓ Lightweight L-head design.
- ✓ Patented Easy Start Performance (ESP) technology ensures easy starting.
- ✓ Full pressure lubrication system keeps all critical areas supplied with oil for longer engine life.
- ✓ Aluminized muffler protects against rust and keeps engine quieter, longer.
- ✓ Premium mechanical governor provides positive, instant response to changing load conditions.
- ✓ Automotive-style paper element air filter gives you superior engine performance and protection.
- ✓ High oil fill with automotive-type dipstick.
- ✓ Certified to EPA Phase II, CARB Tier II standards.
- ✓ Two-year warranty.

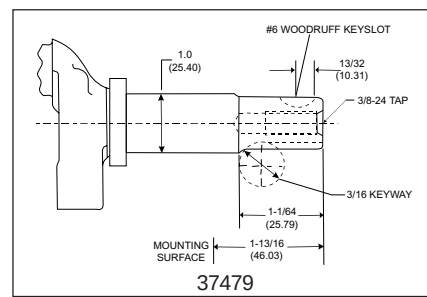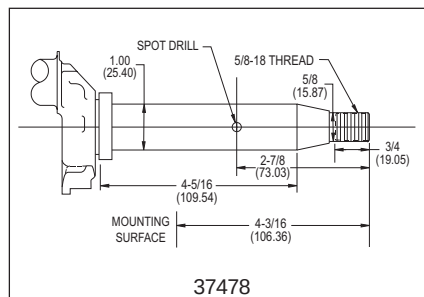

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Compliance Brake Service Part No.	Top Governed Speed	Note
806167B	Toro	37478	Remote Snap-In	35066 (Paper) Ref. 1	Bottom	1 qt. (.95 ltr.) Ref. 2	36559A (Reverse Pull)	3200	
806780	Standard	37479	Fixed Speed	36905 (Paper) Ref. 1	Bottom	1 qt. (.95 ltr.) Ref. 2	36559A (Reverse Pull)	3200	






6.5 HORSEPOWER SMALL FRAME ROTARY LAWN MOWER APPLICATION

MODEL	LV195EA, LEV120
HORSEPOWER	6.5 4.47 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.90 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	18.75 lbs. 8.5 kg
BOLT MTG. CIRCLE	8 in. 203 mm



FEATURES

- Lightweight L-head design.
- Patented Easy Start Performance (ESP) technology ensures easy starting.
- Full pressure lubrication system keeps all critical areas supplied with oil for longer engine life.
- Aluminized muffler protects against rust and keeps engine quieter, longer.
- Premium mechanical governor provides positive, instant response to changing load conditions.
- Automotive-style paper element air filter gives you superior engine performance and protection.
- High oil fill with automotive-type dipstick.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

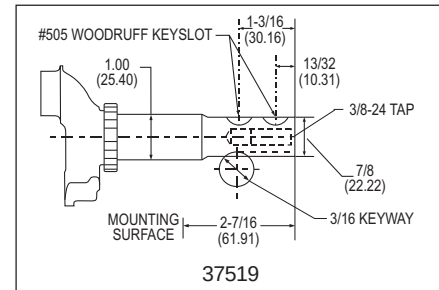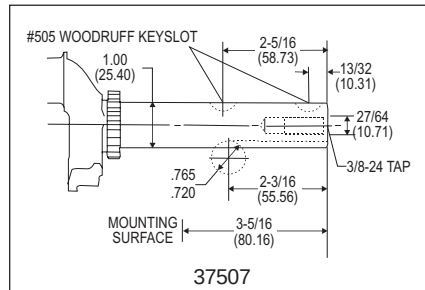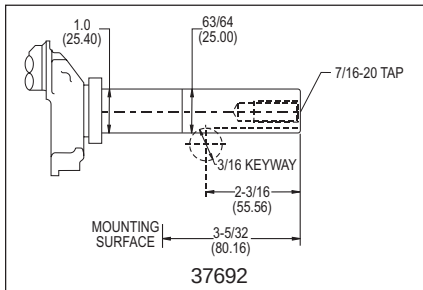

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Compliance Brake Service Part No.	Top Governed Speed	Note
806173A	Toro	37692	Fixed Speed	36905 (Paper) Ref. 1	Bottom	1.25 qt. (1.19 ltrs.) Ref. 2	36559A (Reverse Pull)	3050	†
806174A	Toro	37692	Fixed Speed	36905 (Paper) Ref. 1	Bottom	1 qt. (.95 ltrs.) Ref. 2	36559A (Reverse Pull)	3050	* †
806175	Service	37507	Manual	35066 (Paper) Ref. 1	Bottom	1.25 qt. (1.19 ltrs.) Ref. 2	36559A (Reverse Pull)	3750	
806708C	Standard	37519	Remote	36905 (Paper) Ref. 1	Bottom	1.25 qt. (1.19 ltrs.) Ref. 2		3750	▲

* Equipped with electric starter motor.
† Plastic shroud not included.

▲ Heavy Flywheel







6.5 HORSEPOWER SMALL FRAME ROTARY LAWN MOWER APPLICATION

MODEL	OVRM120
HORSEPOWER	6.5 4.47 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.90 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	25.75 lbs. 11.6 kg
BOLT MTG. CIRCLE	8 in. 203 mm



FEATURES

- Lightweight L-head design.
- Patented Easy Start Performance (ESP) technology ensures easy starting.
- Full pressure lubrication system keeps all critical areas supplied with oil for longer engine life.
- Aluminized muffler protects against rust and keeps engine quieter, longer.
- Premium mechanical governor provides positive, instant response to changing load conditions.
- Automotive-style paper element air filter gives you superior engine performance and protection.
- High oil fill with automotive-type dipstick.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

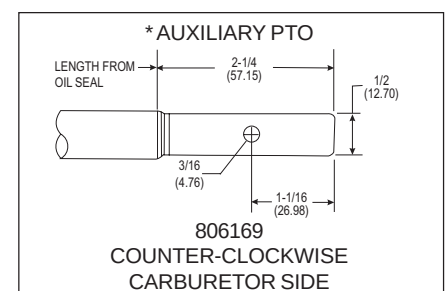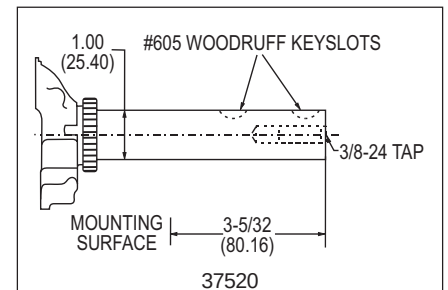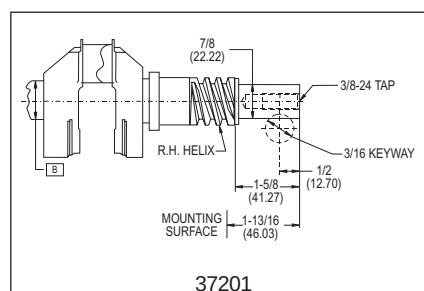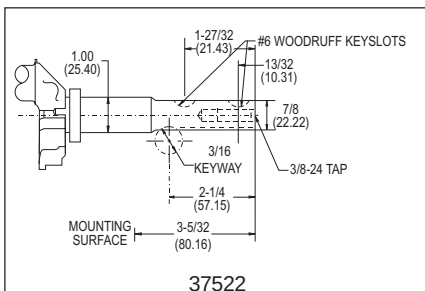


Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Compliance Brake Service Part No.	Top Governed Speed	Note
806163D	Snapper	37520	Remote Snap-In	36905 (Paper) Ref. 1	Side & Bottom	1.5 qt. (1.43 ltrs.) Ref. 2	36559A (Reverse Pull)	3450	
806168B	Murray Home Depot - Scotts	37522	Manual Control	36905 (Paper) Ref. 1	Side & Bottom	1.5 qt. (1.43 ltrs.) Ref. 2	36559A (Reverse Pull)	3200	
806169	Murray	37201	Manual Control	36905 (Paper) Ref. 1	Side & Bottom	1.5 qt. (1.43 ltrs.) Ref. 2	36559A (Reverse Pull)	3200	*




8.0 HORSEPOWER RIDER APPLICATION

MODEL	TVM220
HORSEPOWER	8.0 5.97 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	32 oz. .94 ltr.
(APPROX.) WEIGHT	57 lbs. 25.9 kg
BOLT MTG. CIRCLE	8 & 10 in. 203 mm & 254 mm

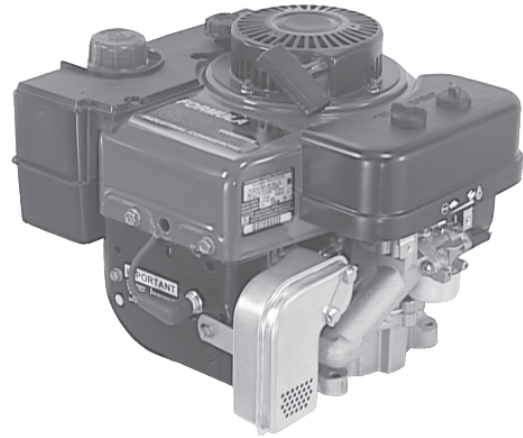

FEATURES

- † Cast Iron Cylinder Sleeve.
- † Ultra-Balance^{AE} System.
- † Paper Kleen-Aire System with Pre-Filter.
- † Float Carburetor with Choke.
- † Aluminized Muffler with Catalyst.
- † Mechanical Governor.
- † Electronic CDI Ignition.
- † Positive Displacement Oil Pump.
- † Oil Fill Tube with Dipstick.
- † Mechanical Compression Release.
- † Certified to EPA Phase II, CARB Tier II standards.
- † Two-year warranty.

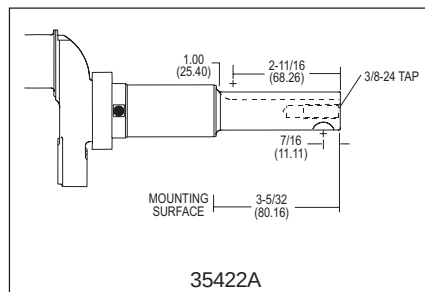

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Starter	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
808770C	Snapper	35422A	3 Amp D.C.	Remote	†Electric Provisions w/Rewind	35403 (Paper) 35404 (Poly) Ref. 5	Side	None	3400
808771D	Toro	35422A	3 Amp D.C.	Remote	Electric Starter w/o Rewind	35403 (Paper) 35404 (Poly) Ref. 5	Dual Sides	None	3350
808772C	Ariens	35422A	3 Amp D.C.	Remote w/Override	Electric Starter w/Rewind	35403 (Paper) 35404 (Poly) Ref. 5	Side	3 qt. (2.85 ltrs.) Ref. 3	3250

Ü 36680 - 12 Volt electric starter can be installed.

33635C - Blower housing is needed to mount recoil starter.

NOTE: For replacements requiring 7/8" (22.22) diameter crankshaft, order 37660.




10.0 HORSEPOWER RIDER APPLICATION

MODEL	TVM220
HORSEPOWER	10.0 7.46 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	32 oz. .94 ltr.
(APPROX.) WEIGHT	57 lbs. 25.9 kg
BOLT MTG. CIRCLE	8 & 10 in. 203 mm & 254 mm



FEATURES

- † Low emission overhead valve design.
- † KLEEN-AIRE[®] intake air cleaning system with paper air filter means less engine wear.
- † Large 1.375" main bearings for smooth, long life.
- † Ultra-Balance[®] low vibration system.
- † 12 Volt electric starter.
- † Certified to EPA Phase II, CARB Tier II standards.
- † Two-year warranty.

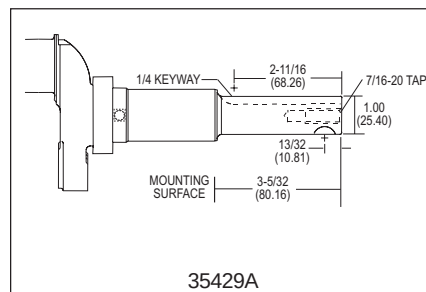

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Starter	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
810762C	Murray	35429A	3 Amp D.C.	Remote	Electric Starter w/o Rewind	35403 (Paper) 35404 (Poly) Ref. 5	Side	3 qt. (2.85 ltrs.) Ref. 3	3400
810763C	Murray	35429A	3 Amp D.C.	Remote w/Override	Electric Starter w/o Rewind	35403 (Paper) 35404 (Poly) Ref. 5	Side	3 qt. (2.85 ltrs.) Ref. 3	3400

33635C - Blower housing is needed to mount recoil starter composite with 8 studs.

NOTE: For replacements requiring 7/8" (22.22) diameter crankshaft, order 37660.




13.0, 13.5 HORSEPOWER OVERHEAD VALVE RIDER APPLICATION

MODEL	OV358EA, OHV130-135
HORSEPOWER	13.0, 13.5 9.69 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	32 oz. 39 oz. w/oil filter .95 ltr. 1.17 ltrs.
(APPROX.) WEIGHT	64 lbs. 28.8 kg
BOLT MTG. CIRCLE	8 & 10 in. 203 mm & 254 mm



FEATURES

- Low emission overhead valve design.
- KLEEN-AIRE[®] intake air cleaning system with paper air filter means less engine wear.
- Large 1.375" main bearings for smooth, long life.
- Ultra-Balance[®] low vibration system.
- 12 Volt electric starter.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

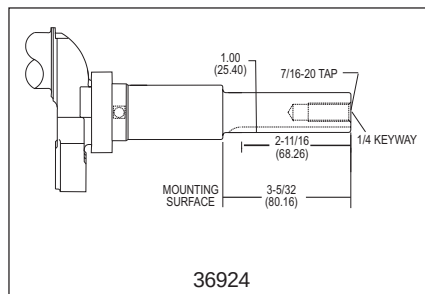

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Starter	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Top Governed Speed	Notes
813700B	MTD	36924	3 Amp D.C. 5 Amp A.C.	Remote	Electric Starter	36356 (Paper) 36357 (Poly) Ref. 5	Side	3250	● ▲ *
813701D	Swisher	36924	3 Amp D.C.	Remote	Electric Starter	36356 (Paper) 36357 (Poly) Ref. 5	Side	3600	▲ *

- Muffler omitted
- ▲ Fuel tank omitted
- * Rotary pump with oil filter.





18.0 HORSEPOWER OVERHEAD VALVE RIDER APPLICATION

MODEL	OV490EA, OHV180	
HORSEPOWER	18.0	13.4 kW
BORE & STROKE	3.562 x 3.00 in. 90.48 x 76.6 mm	
DISPLACEMENT	29.9 cu. in. 490 cc	
OIL CAPACITY	55 oz.	62 oz. w/oil filter
	1.65 ltrs.	1.86 ltrs.
(APPROX.) WEIGHT	75 lbs.	33.8 kg
BOLT MTG. CIRCLE	10 in.	254 mm



FEATURES

- Automotive-style Gerotor pump lubrication keeps all bearing areas supplied with oil for longer engine life.
- Extra large 1.625" main bearings for smooth, long life.
- KLEEN-AIRE[®] intake air cleaning system with a paper air filter means less engine wear.
- Vertical crankshaft with counterclockwise rotation when viewed from power take-off end.
- 12 Volt electric starter.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

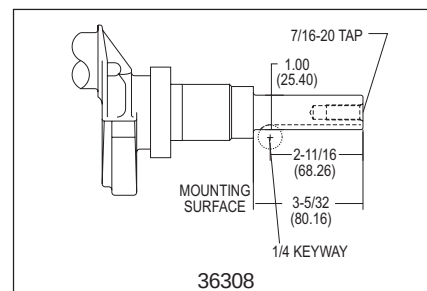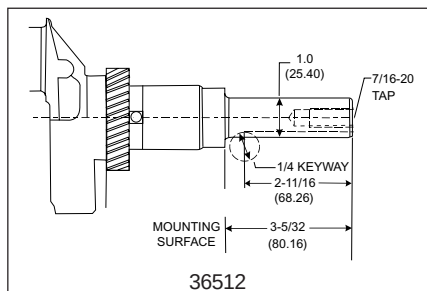

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Starter	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
818500A	Service Dual CB*	36512	3 Amp D.C. 5 Amp A.C.	Remote	Electric Starter w/o Rewind	36356 (Paper) 36357 (Poly) Ref. 5	Side	None	3450
818501A	Service Single CB*	36308	16 Amp D.C. w/Regulator	Remote	Electric Starter w/o Rewind	36356 (Paper) 36357 (Poly) Ref. 5	Side	None	3450

CB Counterbalance

* 36435A - Oil filter can be installed.





22.0 HORSEPOWER OVERHEAD VALVE RIDER APPLICATION

MODEL	OV691EA, TVT691
HORSEPOWER	22.0 16.4 kW
BORE & STROKE	3.125 x 2.75 in. 79.38 x 69.85 mm
DISPLACEMENT	42.18 cu. in. 691 cc
OIL CAPACITY	72 oz. 80 oz. w/oil filter 2.16 ltrs. 2.4 ltrs.
(APPROX.) WEIGHT	90 lbs. 40.5 kg
BOLT MTG. CIRCLE	10 in. 254 mm



FEATURES

- ✓ Smooth, low vibration twin cylinder power.
- ✓ Automotive-style Gerotor oil pump lubrication system keeps all bearing areas supplied with oil for longer engine life.
- ✓ Dual carburetors.
- ✓ Vertical crankshaft with counterclockwise rotation when viewed from power take-off end.
- ✓ 12 Volt electric starter.
- ✓ Certified to EPA Phase II, CARB Tier II standards.
- ✓ Two-year warranty.

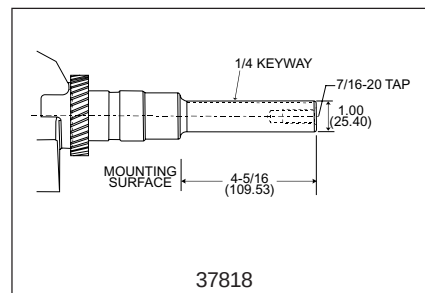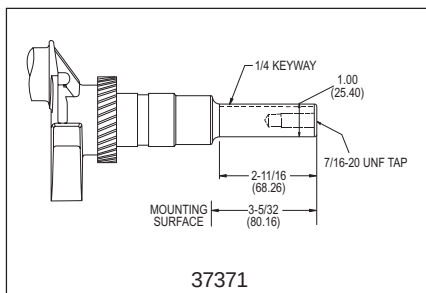


Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Starter	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
822500A	Standard	37371	3 Amp D.C. 5 Amp A.C.	Remote	Electric w/o Rewind	37360 (Paper) Ref. 7	Side	None	3350
822502	MTD	37371	16 Amp D.C. w/Regulator	Remote	Electric w/o Rewind	37360 (Paper) 37361 (Poly) Ref. 7	Side	None	3450
825500A	MTD	37818	16 Amp D.C. w/Regulator	Remote	Electric Starter w/o Rewind	37360 (Paper) 37361 (Poly) Ref. 7	Side	None	3450




3.0 HORSEPOWER TILLER APPLICATION

MODEL	H30
HORSEPOWER	3.0 2.24 kW
BORE & STROKE	2.50 x 1.844 in. 63.51 x 46.84 mm
DISPLACEMENT	9.06 cu. in. 148 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	25 lbs. 11.34 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm

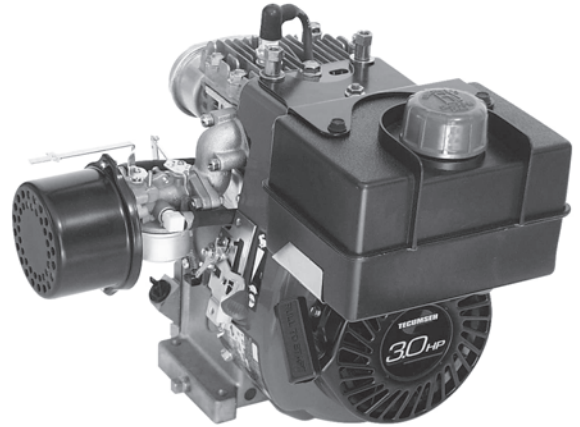

FEATURES

- ✓ Polyethylene fuel tank prevents rust and features a large, easy-fill opening.
- ✓ Soft-pull recoil starter for easy starts.
- ✓ Electronic capacitor discharge ignition (CDI) system for easy starting, even at low pulling speeds.
- ✓ Aluminized muffler resists corrosion so engine remains quieter longer.
- ✓ Certified to EPA Phase II, CARB Tier II standards.
- ✓ Two-year warranty.

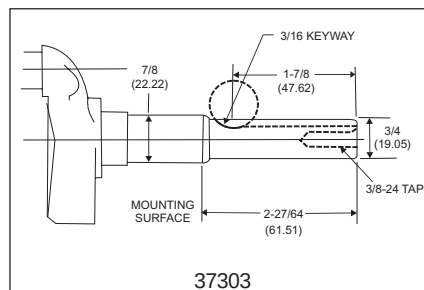


Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Exhaust Direction	Fuel Tank (pg. 3) Ref.No.	Top Governed Speed Ref. No.
903666A	Garden Way	37303	Remote/Manual Convertible	30727 (Paper) Ref. 1	Dual Sides	PTO Side	2 qt. (1.89 ltrs.) Ref. 5	3750





3.5 HORSEPOWER TILLER APPLICATION

MODEL	H35
HORSEPOWER	3.5 2.61 kW
BORE & STROKE	2.50 x 1.938 in. 63.51 x 49.23 mm
DISPLACEMENT	9.52 cu. in. 156 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	25 lbs. 11.34 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm

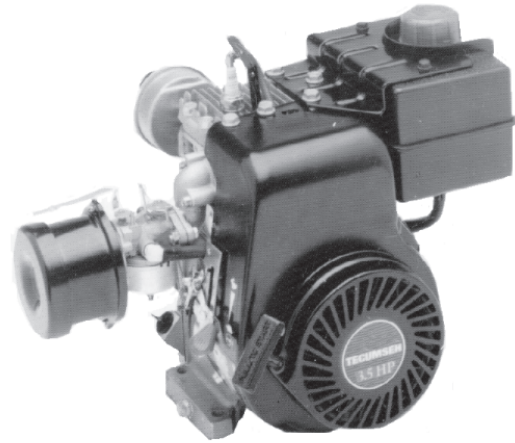

FEATURES

- † Polyethylene fuel tank prevents rust and features a large, easy-fill opening.
- † Soft-pull recoil starter for easy starts.
- † Electronic capacitor discharge ignition (CDI) system for easy starting, even at low pulling speeds.
- † Aluminized muffler resists corrosion so engine remains quieter longer.
- † Certified to EPA Phase II, CARB Tier II standards.
- † Two-year warranty.

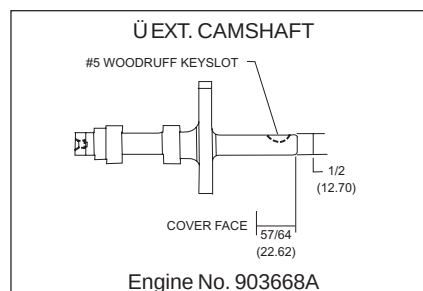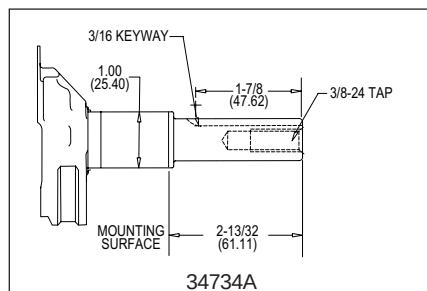


Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Exhaust Direction	Top Governed Speed	Note
903668A	Garden Way	34734A	Remote/Manual Convertible	30727 (Paper) Ref. 1	Dual Sides	2 qt. (1.89 ltrs.) Ref. 4	PTO Side	3750	†

Ü 2:1 Extended camshaft.




3.5 HORSEPOWER MINI-BIKE APPLICATION

MODEL	H35
HORSEPOWER	3.5 2.61 kW
BORE & STROKE	2.50 x 1.938 in. 63.51 x 49.23 mm
DISPLACEMENT	9.52 cu. in. 156 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	25 lbs. 11.34 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm

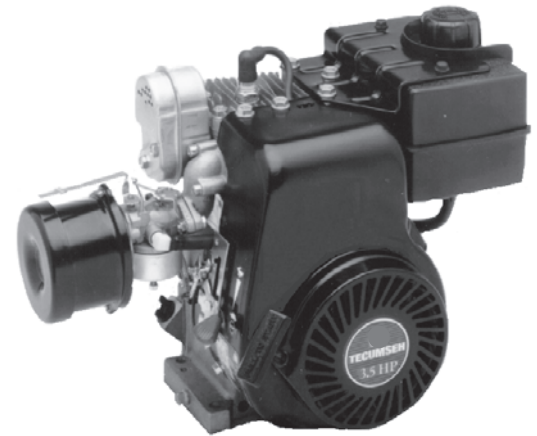

FEATURES

- † Polyethylene fuel tank prevents rust and features a large, easy-fill opening.
- † Soft-pull recoil starter for easy starts.
- † Electronic capacitor discharge ignition (CDI) system for easy starting, even at low pulling speeds.
- † Aluminized muffler resists corrosion so engine remains quieter longer.
- † Certified to EPA Phase II, CARB Tier II standards.
- † Two-year warranty.

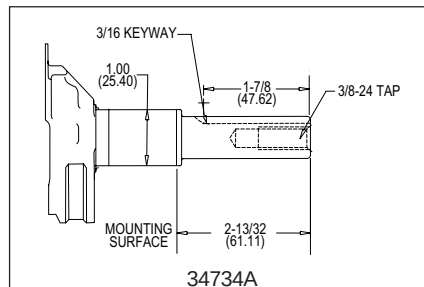

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Exhaust Direction	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
903451B	Standard	34734A	Mini-Bike (Remote)	30727 (Paper) 35974 (Poly) Ref. 1	Dual Sides	Carb. Side	2 qt. (1.89 ltrs.) Ref. 4	4000




4.0 HORSEPOWER MINI-BIKE APPLICATION

MODEL	H40
HORSEPOWER	4.0 2.61 kW
BORE & STROKE	2.50 x 1.938 in. 63.51 x 49.23 mm
DISPLACEMENT	9.52 cu. in. 156 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	25 lbs. 11.34 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm



FEATURES

- † Polyethylene fuel tank prevents rust and features a large, easy-fill opening.
- † Soft-pull recoil starter for easy starts.
- † Electronic capacitor discharge ignition (CDI) system for easy starting, even at low pulling speeds.
- † Aluminized muffler resists corrosion so engine remains quieter longer.
- † Certified to EPA Phase II, CARB Tier II standards.
- † Two-year warranty.

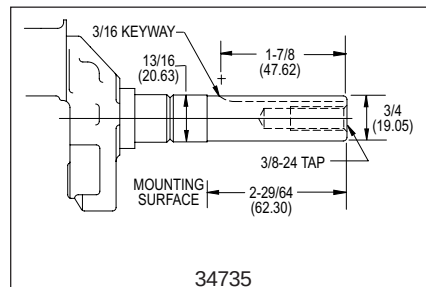

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Exhaust Direction	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
904416B	Standard	34735	Mini-Bike (Remote)	30727 (Paper) 35974 (Poly) Ref. 1	Dual Sides	Carb. Side	2 qt. (1.89 ltrs.) Ref. 4	4000








5.0 HORSEPOWER WINTER APPLICATION

MODEL	LH195SA, HSSK50
HORSEPOWER	5.0 3.73 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.88 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	33 lbs. 15.0 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm



FEATURES

- Manual choke and easy start primer give fast, reliable starts on the coldest days.
- Winter Engineered[®] to prevent ice buildup and engine shut downs.
- Premium mechanical governor provides positive, instant response to changing load conditions.
- High oil fill with automotive-type dipstick.
- Two-year warranty with ten years on electronic ignition.

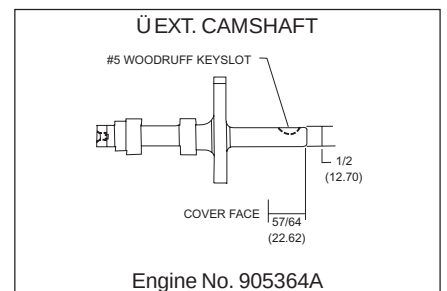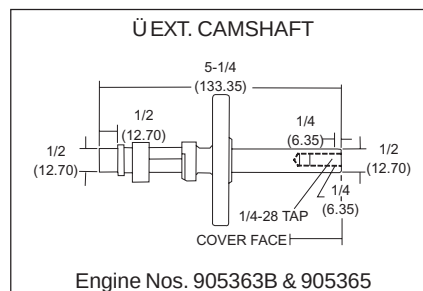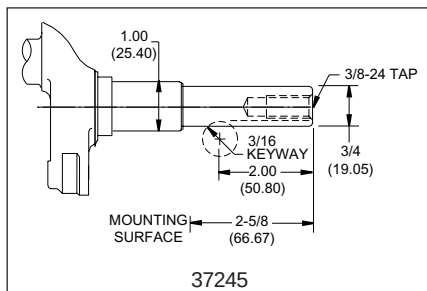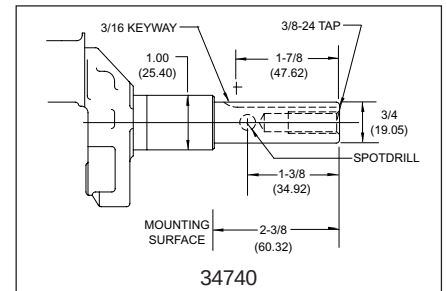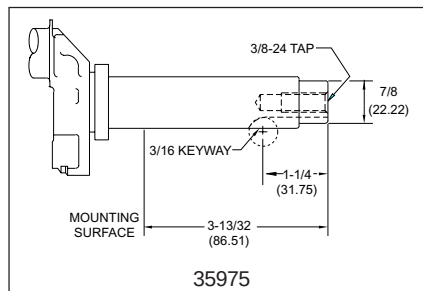

Part Number	Customer	Crankshaft Service Part No.	Provisions for Electric Starter	Controls	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed	Note
905363B	MTD	35975	X *	Remote/Manual Convertible	Dual Sides & Front	2 qt. (1.89 ltrs.) Ref. 4	3750	†
905364A	Standard	34740	X *	Remote/Manual Convertible	Dual Sides & Front	2 qt. (1.89 ltrs.) Ref. 4	3750	†
905365	Standard	35975	X *	Remote/Manual Convertible	Dual Sides & Front	2 qt. (1.89 ltrs.) Ref. 4	3750	†
905367	Murray	37245	X *	Remote/Manual Convertible	Dual Sides & Front	2 qt. (1.89 ltrs.) Ref. 4	3750	†

* 33290E - 120 Volt electric starter can be installed.

Ü 2:1 Extended camshaft.




5.5 HORSEPOWER OVERHEAD VALVE UTILITY APPLICATION

MODEL	OH195EA, OHH55
HORSEPOWER	5.5 4.10 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.88 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	30 lbs. 13.5 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm



FEATURES

- † Polyethylene fuel tank prevents rust and features a large, easy-fill opening.
- † Soft-pull recoil starter for easy starts.
- † Electronic capacitor discharge ignition (CDI) system for easy starting, even at low pulling speeds.
- † Aluminized muffler resists corrosion so engine remains quieter longer.
- † KLEEN-AIRE^{AE} filtration system pre-cleans air for superior performance and extended life.
- † Certified to EPA Phase II, CARB Tier II standards.
- † Two-year warranty.

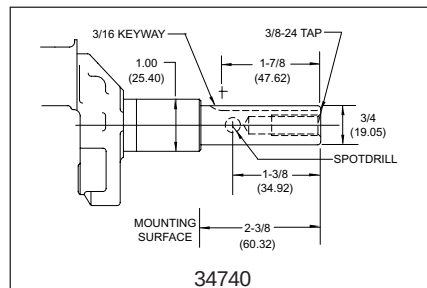

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
905242D	Standard	34740	Manual/Remote Convertible	36046 (Paper) Ref. 1	Dual Side & Front	3 qt. (2.85 ltrs.) Ref. 4	3750







6.0 HORSEPOWER OVERHEAD VALVE VARIOUS APPLICATIONS

MODEL	OH195EA, OHH60
HORSEPOWER	6.0 4.10 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.88 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	30 lbs. 13.5 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm



FEATURES

- † Polyethylene fuel tank prevents rust and features a large, easy-fill opening.
- † Soft-pull recoil starter for easy starts.
- † Electronic capacitor discharge ignition (CDI) system for easy starting, even at low pulling speeds.
- † Aluminized muffler resists corrosion so engine remains quieter longer.
- † KLEEN-AIRE[®] filtration system pre-cleans air for superior performance and extended life.
- † Certified to EPA Phase II, CARB Tier II standards.
- † Two-year warranty.

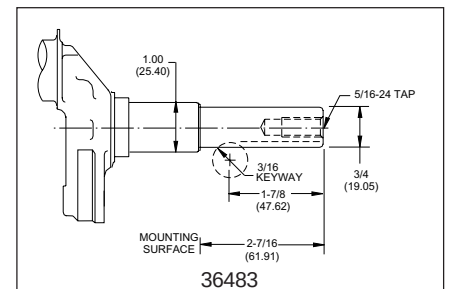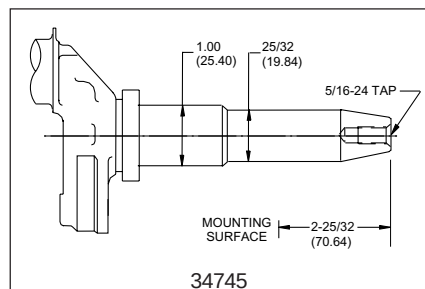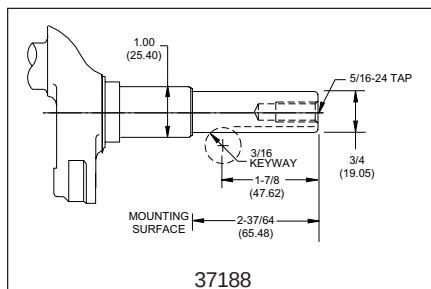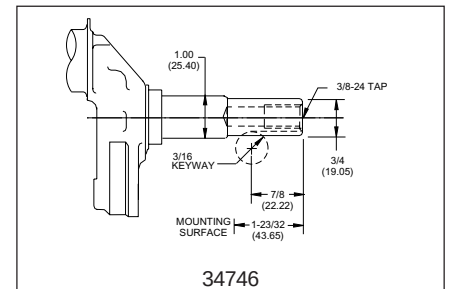

Part Number	Customer	Crankshaft Service Part No.	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
906221C	Murray	37188	RV Control	36046 (Paper) 36634 (Poly) Ref. 1	Dual Side & Front	3 qt. (2.85 ltrs.) Ref. 4	3350
906222B	Generac	34745	Fixed Speed	36046 (Paper) Ref. 1	Dual Side & Front	3 qt. (2.85 ltrs.) Ref. 4	3900
906223D	Murray	36483	RV Control	36046 (Paper) 36634 (Poly) Ref. 1	Dual Side & Front	3 qt. (2.85 ltrs.) Ref. 4	3350
906604	MTD	34746	Manual	36046 (Paper) Ref. 1	Dual Side & Front	3 qt. (2.85 ltrs.) Ref. 4	3750







7.0 HORSEPOWER OVERHEAD VALVE WINTER APPLICATION

MODEL	OH195SA, OHSK70
HORSEPOWER	7.0 5.22 kW
BORE & STROKE	2.795 x 1.938 in. 70.99 x 49.23 mm
DISPLACEMENT	11.88 cu. in. 195 cc
OIL CAPACITY	21 oz. .62 ltr.
(APPROX.) WEIGHT	30 lbs. 13.5 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm



FEATURES

- † Manual choke and easy start primer give fast, reliable starts on the coldest days.
- † Winter Engineered^{AE} to prevent ice buildup and engine shut downs.
- † Premium mechanical governor provides positive, instant response to changing load conditions.
- † High oil fill with automotive-type dipstick.
- † Two-year warranty with ten years on electronic ignition.

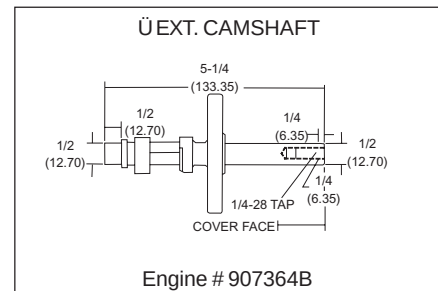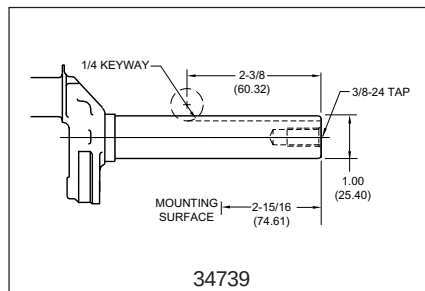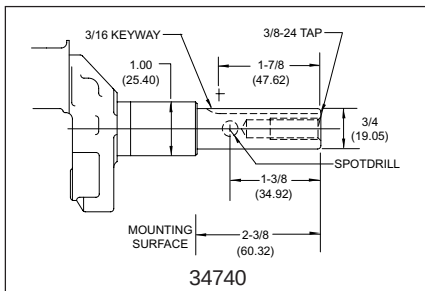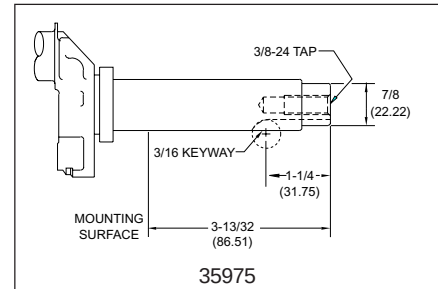


Part Number	Customer	Crankshaft Service Part No.	Controls	Provisions for Electric Starter	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed	Note
907364B	MTD	35975	Manual	X *	Front Dual Side	3.5 qt. (3.33 ltrs.) Ref. 4	3750	†
907365C	Standard	34739	Manual	X *	Front Dual Side	3.5 qt. (3.33 ltrs.) Ref. 4	3750	
907366A	Standard	34740	Manual	X *	Front Dual Side	3.5 qt. (3.33 ltrs.) Ref. 4	3750	

* 33290E - 120 Volt electric starter kit can be installed.
 Ü 2:1 extended camshaft







9.0 HORSEPOWER WINTER APPLICATION

MODEL	LH318SA, HMSK90
HORSEPOWER	9.0 5.97 kW
BORE & STROKE	3.125 x 2.532 in. 79.38 x 64.31 mm
DISPLACEMENT	19.43 cu. in. 318 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	55 lbs. 25.0 kg
BOLT MTG. CIRCLE	3.625 & 5 in. 90 mm & 130 mm

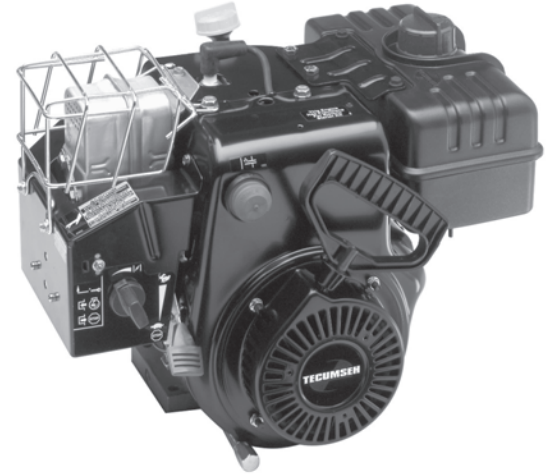

FEATURES

- Manual choke and easy start primer give fast, reliable starts on the coldest days.
- Winter Engineered[®] to prevent ice buildup and engine shut downs.
- Cast iron cylinder sleeve for extended engine life. (Enduro[®] XL only)
- Premium mechanical governor provides positive, instant response to changing load conditions.
- High oil fill with automotive-type dipstick.
- Two-year warranty with ten years on electronic ignition.

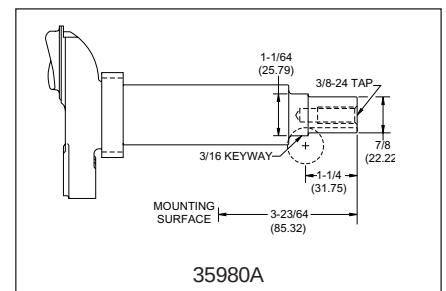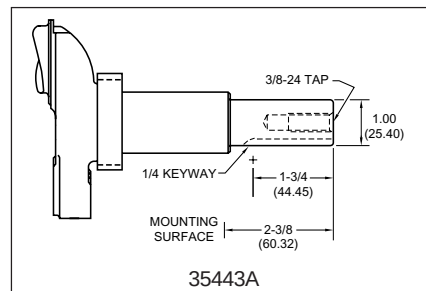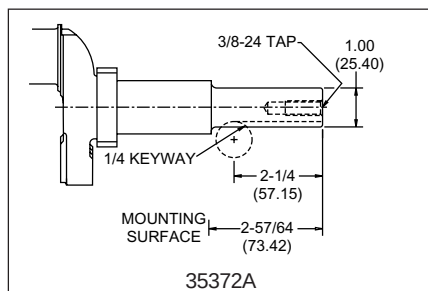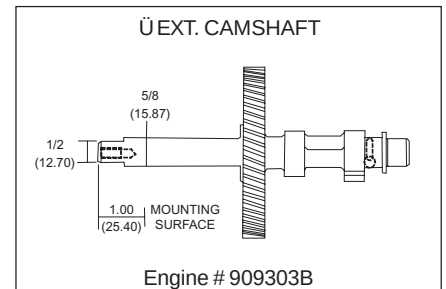

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Provisions for Electric Starter	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
909300A	Standard	35372A	3 Amp A.C.	Manual	x *	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3450
909301A	Standard	35443A		Manual	x *	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3250
909303B	MTD †	35980A	18 Watt	Manual	x *	Front Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600


* 33329E - 120 Volt electric starter can be installed.

Ü 2:1 Extended camshaft




9.0 HORSEPOWER OVERHEAD VALVE WINTER APPLICATION

MODEL	OH318SA, OHSK90
HORSEPOWER	9.0 6.71 kW
BORE & STROKE	3.125 x 2.532 in. 79.38 x 64.31 mm
DISPLACEMENT	19.43 cu. in. 318 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	60 lbs. 27.2 kg
BOLT MTG. CIRCLE	3.625 & 5 in. 90 mm & 130 mm

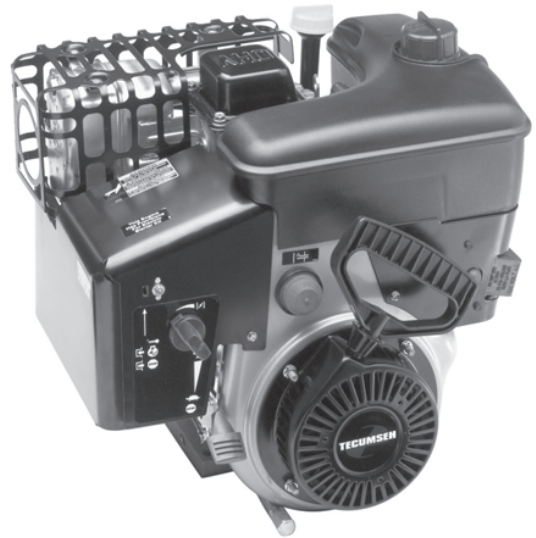

FEATURES

- † Manual choke and easy start primer give fast, reliable starts on the coldest days.
- † Winter Engineered[®] to prevent ice buildup and engine shut downs.
- † Cast iron cylinder sleeve for extended engine life. (Enduro[®] XL only)
- † Premium mechanical governor provides positive, instant response to changing load conditions.
- † High oil fill with automotive-type dipstick.
- † Two-year warranty with ten years on electronic ignition.

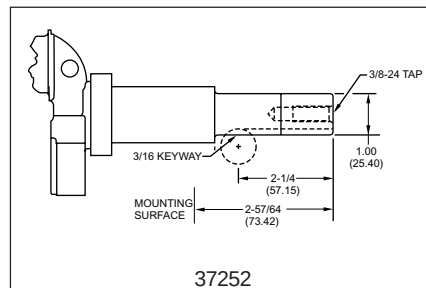

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Provisions for Electric Starter	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
909302B	Standard	37252	18 Watt	Manual	X *	Dual Side	1 Gallon (3.8 ltrs.) Ref. 9	3600

* 33329E - 120 Volt electric starter can be installed.







10.0 HORSEPOWER MEDIUM FRAME

MODEL	HM100
HORSEPOWER	10.0 7.46 kW
BORE & STROKE	3.125 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	56 lbs. 25.45 kg
BOLT MTG. CIRCLE	3.625 & 5 in. 90 mm & 130 mm



FEATURES

- Soft-pull recoil starter for easy starts.
- Electronic capacitor discharge ignition (CDI) system for easy starting, even at low pulling speeds.
- Polyethylene fuel tank prevents rust and features a large, easy-fill opening.
- Aluminized muffler resists corrosion so engine remains quieter longer.
- Certified to EPA Phase II, CARB Tier II standards.
- Two-year warranty.

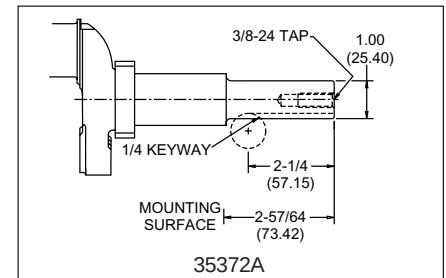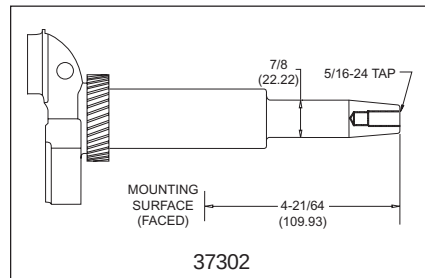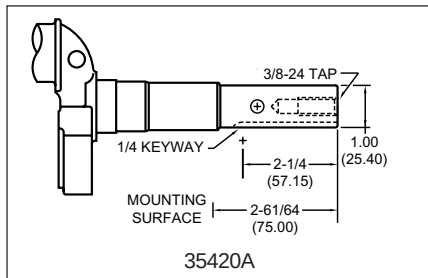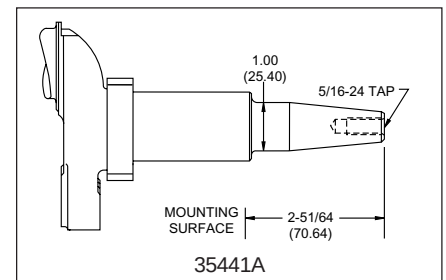


Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Starter	Air Cleaner Style (pg. 2) Service Part No.	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
910206B	MTD Ltd. BB	35420A		Manual	Rewind	34700B (Paper) 34703 (Poly) Ref. 4	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3400
910207B	Standard	35372A		Manual	* Electric Provisions w/Rewind	33268 (Paper) Ref. 1	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600
910263D	Coleman ▲	35441A		Fixed Speed	* Electric Provisions w/Rewind	34700B (Paper) 34703 (Poly) Ref. 4	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600
910265D	Devilbiss Ü ▲	37302		Fixed Speed	Rewind	34700B (Paper) 34703 (Poly) Ref. 4	Dual Side	None	3750

- * 36680 - 12 Volt electric starter can be installed.
 Ü Low oil shutdown.
 ▲ Climate guard.
 BB Ball Bearing







11.0 HORSEPOWER WINTER APPLICATION

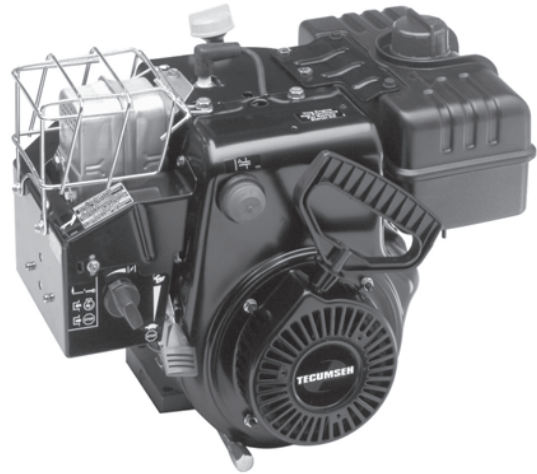

MODEL	LH358SA, HMSK110
HORSEPOWER	11.0 7.46 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	56 lbs. 25.45 kg
BOLT MTG. CIRCLE	3.625 90 mm

FEATURES

- † Manual choke and easy start primer give fast, reliable starts on the coldest days.
- † Winter Engineered[®] to prevent ice buildup and engine shut downs.
- † Cast iron cylinder sleeve for extended engine life. (Enduro[®] XL only)
- † Premium mechanical governor provides positive, instant response to changing load conditions.
- † High oil fill with automotive-type dipstick.
- † Two-year warranty with ten years on electronic ignition.

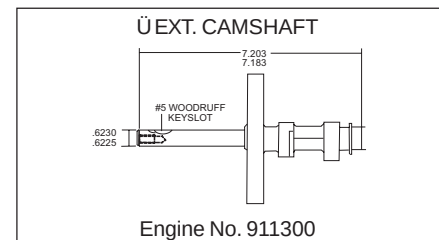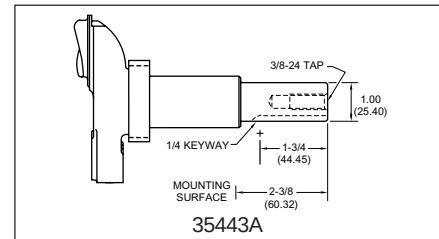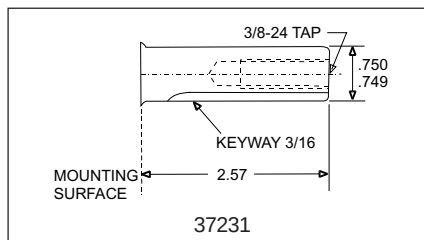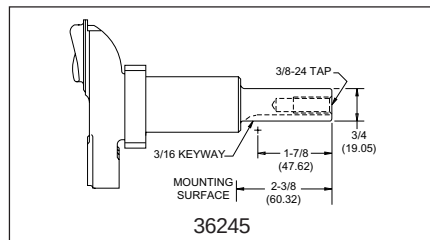

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed	Notes
911300B	Standard	36245	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3450	* †
911301B	Standard	35443A	3 Amp A.C.	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3250	*
911304B	Standard	36245	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600	*
911305B	Standard	35443A	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3450	*
911307	Standard	37231	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600	*


* 33329E - 120 volt electric starter can be installed.

Ü 2:1 extended camshaft







11.0 HORSEPOWER WINTER APPLICATION

MODEL	LH358SA, HMSK110
HORSEPOWER	11.0 7.46 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	56 lbs. 25.45 kg
BOLT MTG. CIRCLE	3.625 90 mm

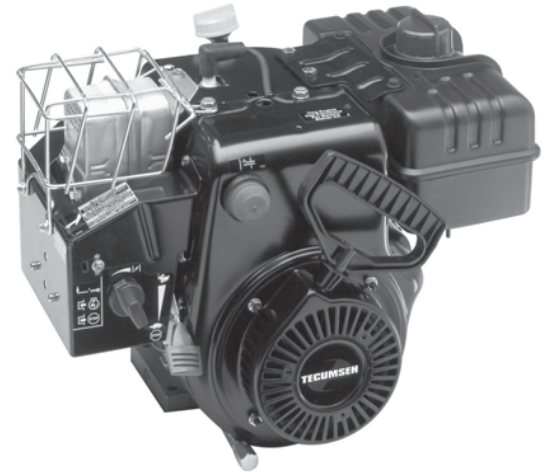

FEATURES

- † Manual choke and easy start primer give fast, reliable starts on the coldest days.
- † Winter Engineered[®] to prevent ice buildup and engine shut downs.
- † Cast iron cylinder sleeve for extended engine life. (Enduro[®] XL only)
- † Premium mechanical governor provides positive, instant response to changing load conditions.
- † High oil fill with automotive-type dipstick.
- † Two-year warranty with ten years on electronic ignition.

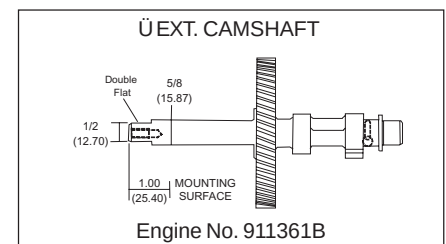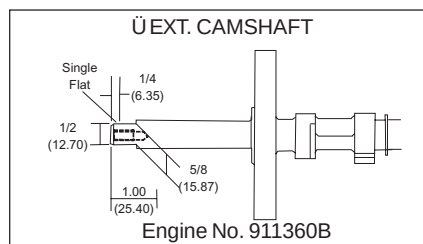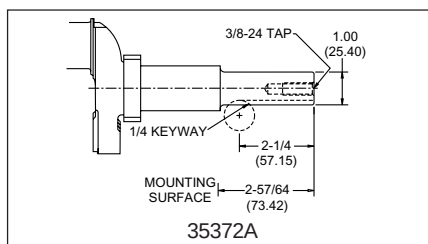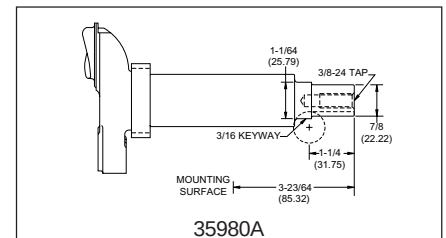


Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed	Notes
911302B	Standard	35372A	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3450	*
911303B	Standard	35372A	3 Amp A.C.	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3450	*
911360B	MTD LTD.	35980A	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600	* †
911361B	Standard	35980A	18 Watt	Manual	Dual Side	4 qt. (3.79 ltrs.) Ref. 4	3600	* †

- * 33329E - 120 Volt electric starter can be installed.
- Ü 2:1 extended camshaft




11.0 HORSEPOWER OVERHEAD VALVE WINTER APPLICATION

MODEL	OH318SA, OHSK110
HORSEPOWER	11.0 8.20 kW
BORE & STROKE	3.125 x 2.532 in. 79.38 x 64.31 mm
DISPLACEMENT	19.43 cu. in. 318 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	60 lbs. 27.2 kg
BOLT MTG. CIRCLE	5 & 6.5 in. 130 mm & 170 mm

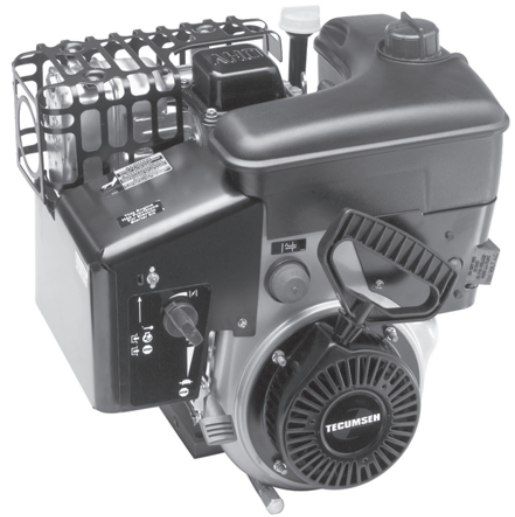

FEATURES

- Manual choke and easy start primer give fast, reliable starts on the coldest days.
- Winter Engineered[®] to prevent ice buildup and engine shut downs.
- Cast iron cylinder sleeve for extended engine life. (Enduro[®] XL only)
- Premium mechanical governor provides positive, instant response to changing load conditions.
- High oil fill with automotive-type dipstick.
- Two-year warranty with ten years on electronic ignition.

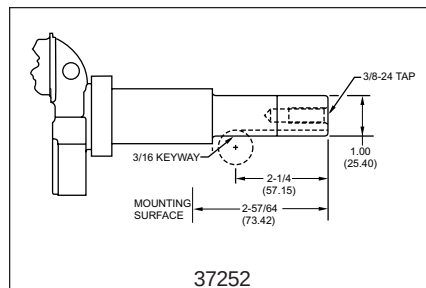

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Provisions for Electric Starter	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
911306C	Standard	37252	18 Watt	Manual	X *	Dual Side	1 Gallon (3.8 ltrs.) Ref. 9	3600

* 33329E - 120 Volt electric starter can be installed.





12.0 HORSEPOWER OVERHEAD VALVE WINTER APPLICATION

MODEL	OH358SA, OHSK120
HORSEPOWER	12.0 8.95 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in.. 358 cc
OIL CAPACITY	26 oz. .77 ltr.
(APPROX.) WEIGHT	60 lbs. 27.2 kg
BOLT MTG. CIRCLE	5 & 6.5 in. 130 mm & 170 mm

FEATURES

- Manual choke and easy start primer give fast, reliable starts on the coldest days.
- Winter Engineered[®] to prevent ice buildup and engine shut downs.
- Cast iron cylinder sleeve for extended engine life.
- Premium mechanical governor provides positive, instant response to changing load conditions.
- High oil fill with automotive-type dipstick.
- Two-year warranty with ten years on electronic ignition.

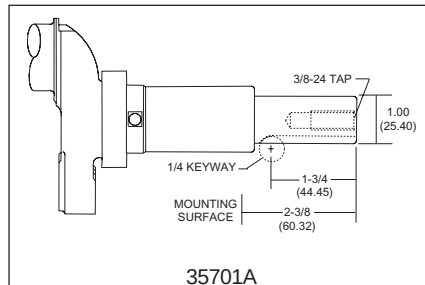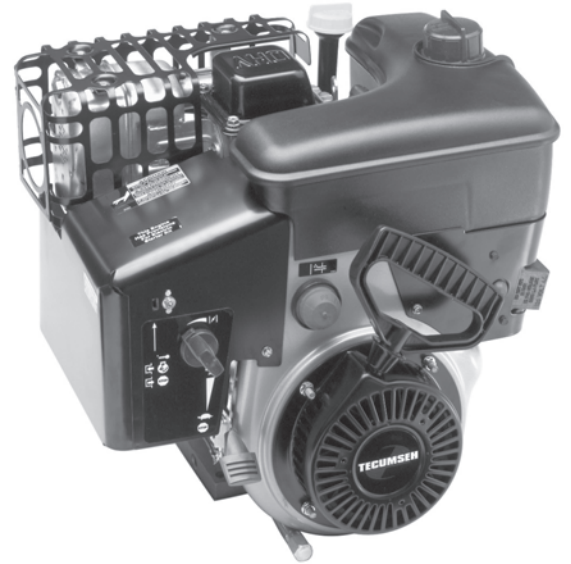


Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Provisions for Electric Starter	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
912301B	Standard	35701A	18 Watt	Manual	X *	Dual Side	6 qt. (5.7 ltrs.) Ref. 4	3600

* 37105 - 120 volt electric starter can be installed.




13.0 HORSEPOWER OVERHEAD VALVE WINTER APPLICATION

MODEL	OH358SA, OHSK130
HORSEPOWER	13.0 9.7 kW
BORE & STROKE	3.312 x 2.532 in. 84.13 x 64.31 mm
DISPLACEMENT	21.82 cu. in. 358 cc
OIL CAPACITY	28 oz. .83 ltr.
(APPROX.) WEIGHT	60 lbs. 27.2 kg
BOLT MTG. CIRCLE	5 & 6.5 in. 130 mm & 170 mm

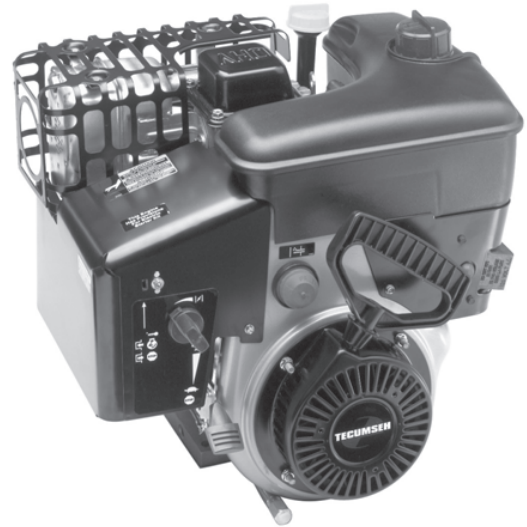

FEATURES

- Manual choke and easy start primer give fast, reliable starts on the coldest days.
- Winter Engineered^{AE} to prevent ice buildup and engine shut downs.
- Cast iron cylinder sleeve for extended engine life.
- Premium mechanical governor provides positive, instant response to changing load conditions.
- High oil fill with automotive-type dipstick.
- Two-year warranty with ten years on electronic ignition.

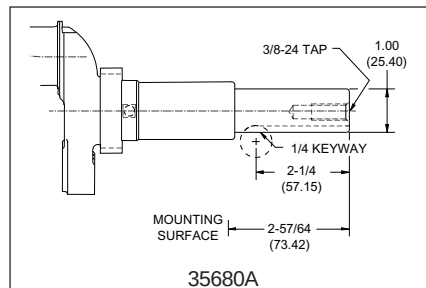

Part Number	Customer	Crankshaft Service Part No.	Charging System	Controls	Provisions for Electric Starter	Oil Drain	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
913300B	Standard	35680A	18 Watt	Manual	X *	Dual Side	1 Gallon (3.8 ltrs.) Ref. 9	3600

* 37105 - 120 Volt electric starter can be installed.







2.0 HORSEPOWER TWO CYCLE MULTI APPLICATIONS

MODEL	TM049XA, TC300
HORSEPOWER	2.0 1.49 kW
BORE & STROKE	1.75 x 1.25 in. 44.43 x 31.7 mm
DISPLACEMENT	3.0 cu. in.. 49.2 cc
OIL / FUEL MIXTURE	24:1
(APPROX.) WEIGHT	7 lbs. 3.2 kg



FEATURES

- Engineered for hand-held applications such as ice and earth augers, mini cultivators, tree pruners, brush cutters and power sprayers.
- Excellent starting, power and performance in cold weather.
- Electronic capacitor discharge ignition system provides starting voltage at low RPM.
- Balanced distribution of weight with minimal vibration ensures stability and durability.
- Load-responsive governor maintains engine speed during changing load conditions and prevents engine overspeeding.
- No-rust polyethylene fuel tank reduces condensation and won't dent or rust.
- Certified to EPA Phase II standards.

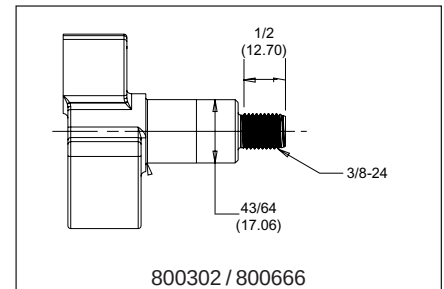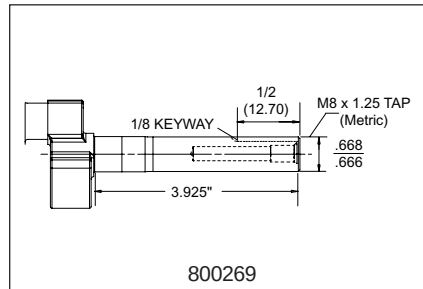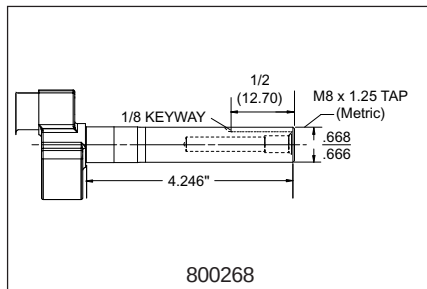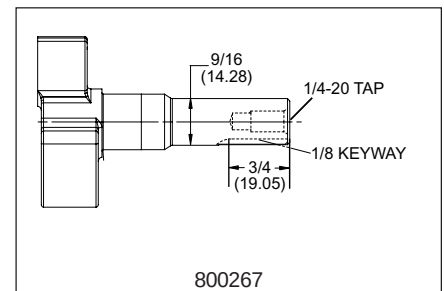

Part Number	Customer	Controls	Air Cleaner Style (pg. 2) Service Part No. Ref. No.	Carburetor	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed +/- 200	Note
800267	Active Technology	Remote	450255 (Flocked Screen) 450252 (Poly) Ref. 3	Diaphragm w/Choke	20 oz. (600 ml) Ref. 7	6000	Long Base
800268	Flymo	Remote	450255 (Flocked Screen) 450252 (Poly) Ref. 3	Diaphragm w/Primer	20 oz. (600 ml) Ref. 7	5500	Short Base
800269	Flymo	Remote	450255 (Flocked Screen) 450252 (Poly) Ref. 3	Diaphragm w/Primer	20 oz. (600 ml) Ref. 7	3800	Short Base
800302	Feldman Ardisam Strikemaster	Remote	450255 (Flocked Screen) 450252 (Poly) Ref. 3	Diaphragm w/Choke	20 oz. (600 ml) Ref. 7	6000	Long Base
800666	Hoffco	Remote	450255 (Flocked Screen) 450252 (Poly) Ref. 3	Diaphragm w/Choke	20 oz. (600 ml) Ref. 7	5200	Short Base





3.0 HORSEPOWER TWO CYCLE VARIOUS APPLICATIONS

MODEL	TV085XA, AV520
HORSEPOWER	3.0 2.24 kW
BORE & STROKE	2.09 x 1.50 in. 53 x 38 mm
DISPLACEMENT	5.2 cu. in. 85 cc
OIL / FUEL MIXTURE	24:1
(APPROX.) WEIGHT	13.2 lbs. 5.9 kg
BOLT MTG. CIRCLE	4.0 in. 102 mm



FEATURES

- Engineered for hand-held applications such as ice and earth augers, mini cultivators, tree pruners, brush cutters and power sprayers.
- Excellent starting, power and performance in cold weather.
- Electronic capacitor discharge ignition system provides starting voltage at low RPM.
- Balanced distribution of weight with minimal vibration ensures stability and durability.
- Load-responsive governor maintains engine speed during changing load conditions and prevents engine overspeeding.
- No-rust polyethylene fuel tank reduces condensation and won't dent or rust.
- Certified to EPA Phase II standards.

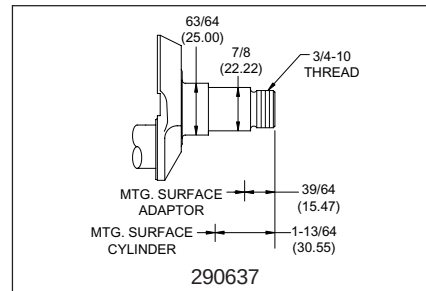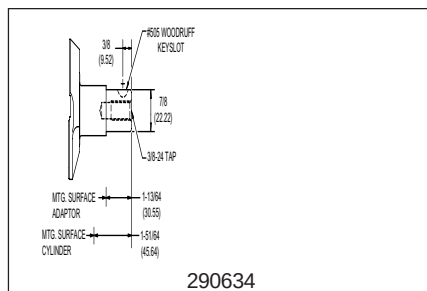

Part Number	Customer	Application	Crankshaft Service No. Part No.	Controls	Air Cleaner Style (pg 2.) Service Part No. Ref. No.	Fuel Tank (pg. 3) Ref. No.	Top Governed Speed
800265B	Feldman	Auger	290634	Remote	None	1 qt. (.95 ltr.) Ref. 8	4500
800266A	Hoffco	Scythe	290637	Remote	450205 (Flocked Screen) 450215 (Poly) Ref. 2	None	4800






3.0 HORSEPOWER TWO CYCLE WINTER APPLICATION

MODEL	TH098SA, HSK600
HORSEPOWER	3.0 2.24 kW
BORE & STROKE	2.09 x 1.75 in. 53 x 44 mm
DISPLACEMENT	6.0 cu. in. 98 cc
OIL / FUEL MIXTURE	50:1
(APPROX.) WEIGHT	12 lbs. 5.44 kg



FEATURES

- Manual choke with remote primer for reliable starts.
- Moisture sealed electronic capacitor discharge ignition (CDI) system, and freeze-resistant easy-pull recoil starter.
- Dependable fixed speed gets you right to work.
- Two-year warranty with ten years on electronic ignition.

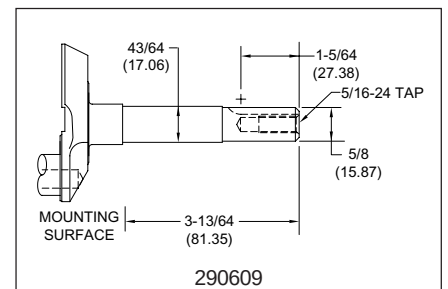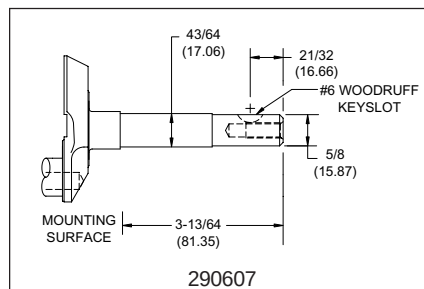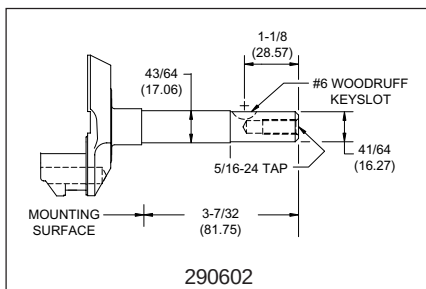

Part Number	Customer	Crankshaft Service Part No.	Provisions for Electric Start	Controls	Top Governed	Notes
900390B	MTD Mont. Ward	290609	X *	Fixed Speed	4700	▲
900392B	Toro	290602	X *	Fixed Speed	4700	▲
900393A	Murray	290607	X *	Fixed Speed	4500	▲
900396A	Snapper	290602	X *	Fixed Speed	4500	▲

* 590556 - 120 Volt electric starter kit can be installed.

▲ Fuel tank omitted.






4.5 HORSEPOWER TWO CYCLE WINTER APPLICATION

MODEL	TH139SA, HSK845
HORSEPOWER	4.5 3.35 kW
BORE & STROKE	2.437 x 1.812 in. 61.9 x 46 mm
DISPLACEMENT	8.46 cu. in. 139 cc
OIL / FUEL MIXTURE	50:1
(APPROX.) WEIGHT	20 lbs. 9.1 kg
BOLT MTG. CIRCLE	3.625 in. 90 mm



FEATURES


- Manual choke with remote primer for reliable starts.
- Moisture sealed electronic capacitor discharge ignition (CDI) system, and freeze-resistant easy-pull recoil starter.
- Dependable fixed speed gets you right to work.
- Two-year warranty with ten years on electronic ignition.

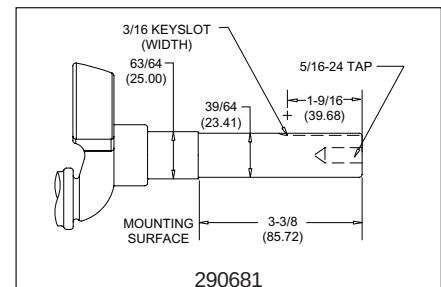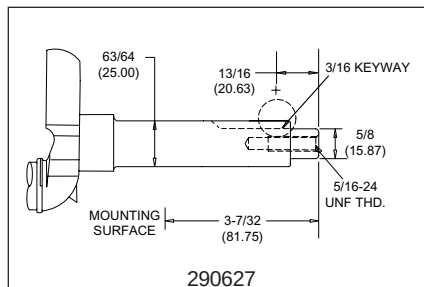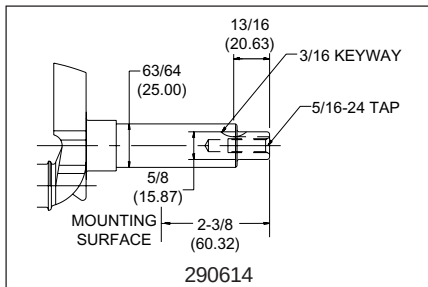

Part Number	Customer	Crankshaft Service Part No.	Provisions for Electric Starter	Controls	Top Governed Speed	Notes
900394B	MTD	290614	X *	Fixed Speed	3800	▲
900395	Toro	290681	X *	Fixed Speed	3850	▲
900397B	Service	290627	X *	Fixed Speed	4000	▲

* 590670 - 120 Volt electric starter kit can be installed.

▲ Fuel tank omitted.

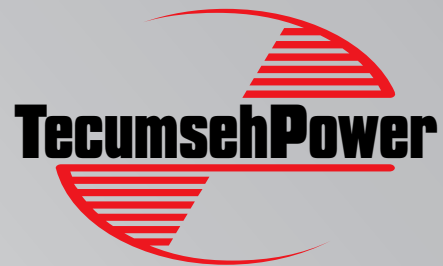

ENGINES & TRANSMISSIONS

TecumsehPower Company
900 North Street
Grafton, WI 53024
Phone: 262-377-2700
Fax: 262-377-4485

TecumsehPower International
152-154 Commercial Road
Staines, Middlesex
United Kingdom TW18 2QP
Phone: (44) 1 784-450785
Fax: 1784-453563

www.TecumsehPower.com