




TECHNICAL DATA

TANDEM ROLLERS

BW 191 AD-5, BW 206 AD-5



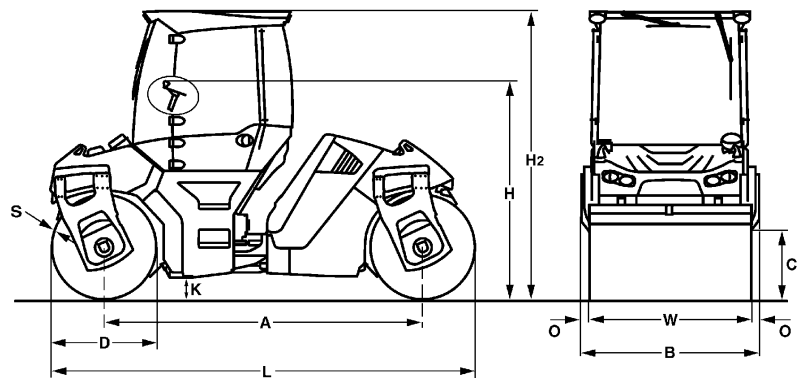

Dimensions in in

	A	B	C	D	H	H2	K	L	O	S	W
BW 191 AD-5	153.5	85.7	29.9	55.1	93.1	121.8	9.8	208.7	3.5	0.7	78.7
BW 206 AD-5	153.5	91.1	29.9	55.1	93.1	121.8	9.8	208.7	3.5	0.7	84.1

Shipping dimensions in cub.yd

BW 191 AD-5
BW 206 AD-5

without ROPS

35.684
37.933

with ROPS

46.685
49.626

Machine type	Compaction output (cub.yd/h) at recommended soil layer thicknesses		
	Gravel, sand	Mixed soil	Silt, clay
BW 191 AD-5	340.1-654.0	235.4-470.9	183.1-287.7
BW 206 AD-5	366.2-719.4	261.6-523.2	196.2-327.0

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	0.8-1.6 in	2.4-3.1 in	3.9-5.5 in
BW 191 AD-5	80-160	130-300	230-560
BW 206 AD-5	90-180	150-300	250-500

Technical Data

BOMAG BW 191 AD-5

BOMAG BW 206 AD-5

Weights

Operating weight CECE w. cab.	lb	29,763	31,085
Axle load, front CECE	lb	14,661	15,322
Axle load, rear CECE	lb	15,102	15,763
Static linear load, front CECE	lb/in	186.2	182.3
Static linear load, rear CECE	lb/in	191.8	187.5
Grossweight	lb	32,188	35,274

Dimensions

Track radius, inner	in	204.3	201.5
---------------------------	----	-------	-------

Driving Characteristics

Max. travel speed	mph	0- 7.5	0- 7.5
-------------------------	-----	--------	--------

Drive

Engine manufacturer		Deutz	Deutz
Type		TCD 4.1 L04	TCD 4.1 L04
Emission stage		4/4	4/4
Cooling		water	water
Number of cylinders		4	4
Performance ISO 14396	kW	105.0	105.0
Speed	min-1	2,300	2,300
Electric equipment	V	12	12

Brakes

Service brake		hydrost.	hydrost.
Parking brake		multi disc	multi disc

Steering

Steering system		oscil.artic.	oscil.artic.
-----------------------	--	--------------	--------------

Exciter system

Vibrating drum		front + rear	front + rear
Autom. vibr. shut off		standard	standard
Frequency	vpm	2,400/3,000	2,400/3,000
Amplitude	in	0.037/0.017	0.036/0.017
Centrifugal force	lb	29,000/21,132	29,000/21,357
Centrifugal force	t	13.1/9.6	13.1/9.7

Capacities

Fuel	gal	43.6	43.6
Water	gal	256.2	256.2

Technical modifications reserved. Machines may be shown with options.

Standard Equipment

- ☒ 2 amplitudes / 2 frequencies
- ☒ ECOMODE
- ☒ Autom. vibration operation
- ☒ Individual vibration control
- ☒ Driver's seat, slewable
 - laterally slidable with steering wheel
- ☒ Emergency stop button
- ☒ On-board computer
 - engine speed
 - Speedometer
 - Fuel consumption
 - Engine temperature
- ☒ V-belt protection
- ☒ Pressure sprinkling system with 2 pumps
- ☒ Indicator and hazard lights
- ☒ Back-up alarm
- ☒ Battery disconnect switch
- ☒ Compartments for documents and tools

Optional Equipment

- ☐ ROPS cabin with seat belts
 - + heating, Ventilation
 - + 4 Working head lights
- ☐ ECONOMIZER
- ☐ BCM-Dokumentation system
- ☐ ROPS cabin with air conditioning
- ☐ Rotary beacon
- ☐ Crab-walk to both sides (6.7in)
- ☐ 2 LED-lights for cabin roof (flatbeam)
- ☐ Edge cutter
- ☐ Special painting
- ☐ Environmentally compliant hydraulic oil
- ☐ Radio/Radio preparation
- ☐ ROPS/FOPS with safety belt
- ☐ Asphalt temperature display
- ☐ Lighting for drum edge front and rear
- ☐ Seat heating
- ☐ Frequency 4,200vpm
- ☐ Approval by the German TÜV
- ☐ BOMAG TELEMATIC POWER
- ☐ Outside mirrors

