

SKYTOWER

SV06CNL

SV08CNL

AICHI GLOBAL SERIES SCISSORS MODEL



SKYTOWER SV06CNL & SV08CNL provide high performance with proportional steering system at working sites.

SV06CNL & SV08CNL achieved long duty cycle with AC motor drive.

1

LONG DUTY CYCLE

AC DRIVING MOTOR improved a duty cycle 150% more as compared with our previous model.

In addition the Non-brush motor will contribute to reduce the running costs.

2

SMOOTH OPERATION SYSTEM

Proportional Drive Control System offers smooth operation. (Option)

90 degrees Steering angle (Front wheel) provides a small turning radius.



3


COMPACT BODY & LARGE PLATFORM

Compact Stowed position with Fold Down Handrail

Platform 2.21m in length plus Extension deck (1.0m)




1,720mm (SV06CNL)
1,845mm (SV08CNL)

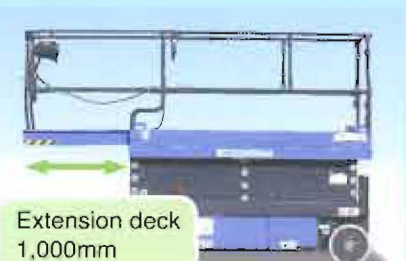

Extension deck
1,000mm

[CAUTION]
ALL PHOTOS: SV08CNL
OPTION DEVICES EQUIPPED,
STANDARD PAINTING COLOR

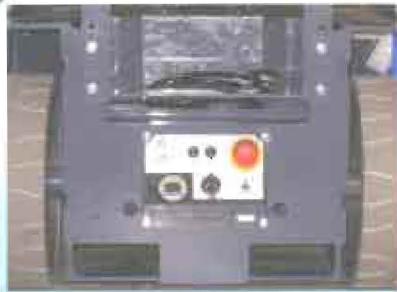

■ **WIDE RANGE OF CHARGING VOLTAGE**
AC100-240V can apply for.




■ **SLIDE-OUT TRAY**
Battery maintenance can be applied by slide-out tray.



■ **EASY ACCESS TO EQUIPMENTS**
Parts can be removed or adjusted with the wrench of 0.4in(10mm) and 0.5in(13mm), phillips-head screwdriver.

DIMENSIONS

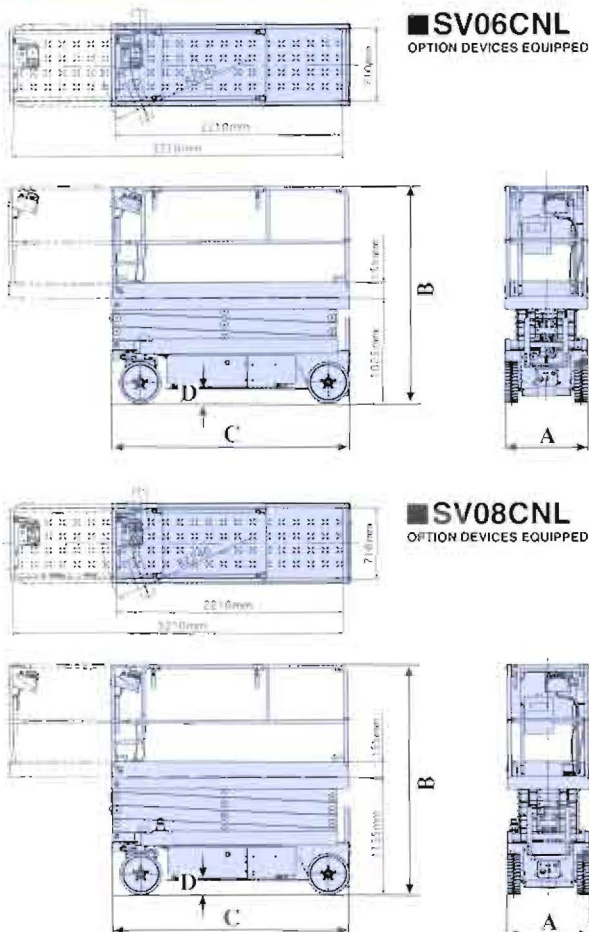

MAJOR SPECIFICATIONS

For European Market

●MODEL		
Model	SV06CNL	SV08CNL
●PLATFORM		
Platform Capacity	360kg	230kg
Platform Extension	1.0m	
Platform High-elevated	6.1m	7.77m
Platform High-Lowered	1.025m	1.115m
Platform Size	2.21m×0.71m×1.1m	
●LIFT & LOWER SYSTEM		
Type	3 scissors link	4 scissors link
Lifting / Lowering time	30sec	40sec
●POWER SYSTEM		
Batteries	24V	
Tyre Type	Solid	
●TRAVEL DEVICE		
Speed	Max4.5km/stowed, 1.0km/lifted	
Gradeability	14degree	
●DIMENSION		
Overall Width	0.8m	
Overall Height	2.125m	2.255m
Overall Length	2.3m	
Ground Clearance	0.115m/stowed, 0.015m/pot hole	
Vehicle Weight	1,810kg	2,140kg
●OPTIONAL EQUIPMENTS		
Proportional steering		

AICHI CORPORATION

Overseas Sales & Marketing Department
<http://www.aichi-corp.jp>

DISTRIBUTORS

The AICHI "2 - 3 - 5 " Warranty

AICHI CORPORATION backs its products with its exclusive "2 - 3 - 5 " Warranty

Two (2) years , Basic warranty parts
three (3) years ,Specified Hydraulic components
five (5) years , Structural components

Note: Due to continuous products improvements,
we reserve the right to make specification
and / or equipment changes without prior notification.