https://truckmanualshub.com/

2600 SERIES

37.4-70 HORSEPOWER

TAKING COMFORT AND PERFORMANCE TO THE NEXT LEVEL.

The 2600 series offers the most user-friendly compact utility tractors in Mahindra's arsenal. But don't be fooled into thinking these affordable tractors compromise on quality and power. 2600 machines are perfect for general farming and landscaping jobs that require the best of the essentials, while also possessing choice features designed for comfort and convenience. That's a lot of tractor for your dollar.

mCRD™ 7 YEAR LIMITED POWERTRAIN WARRANTY

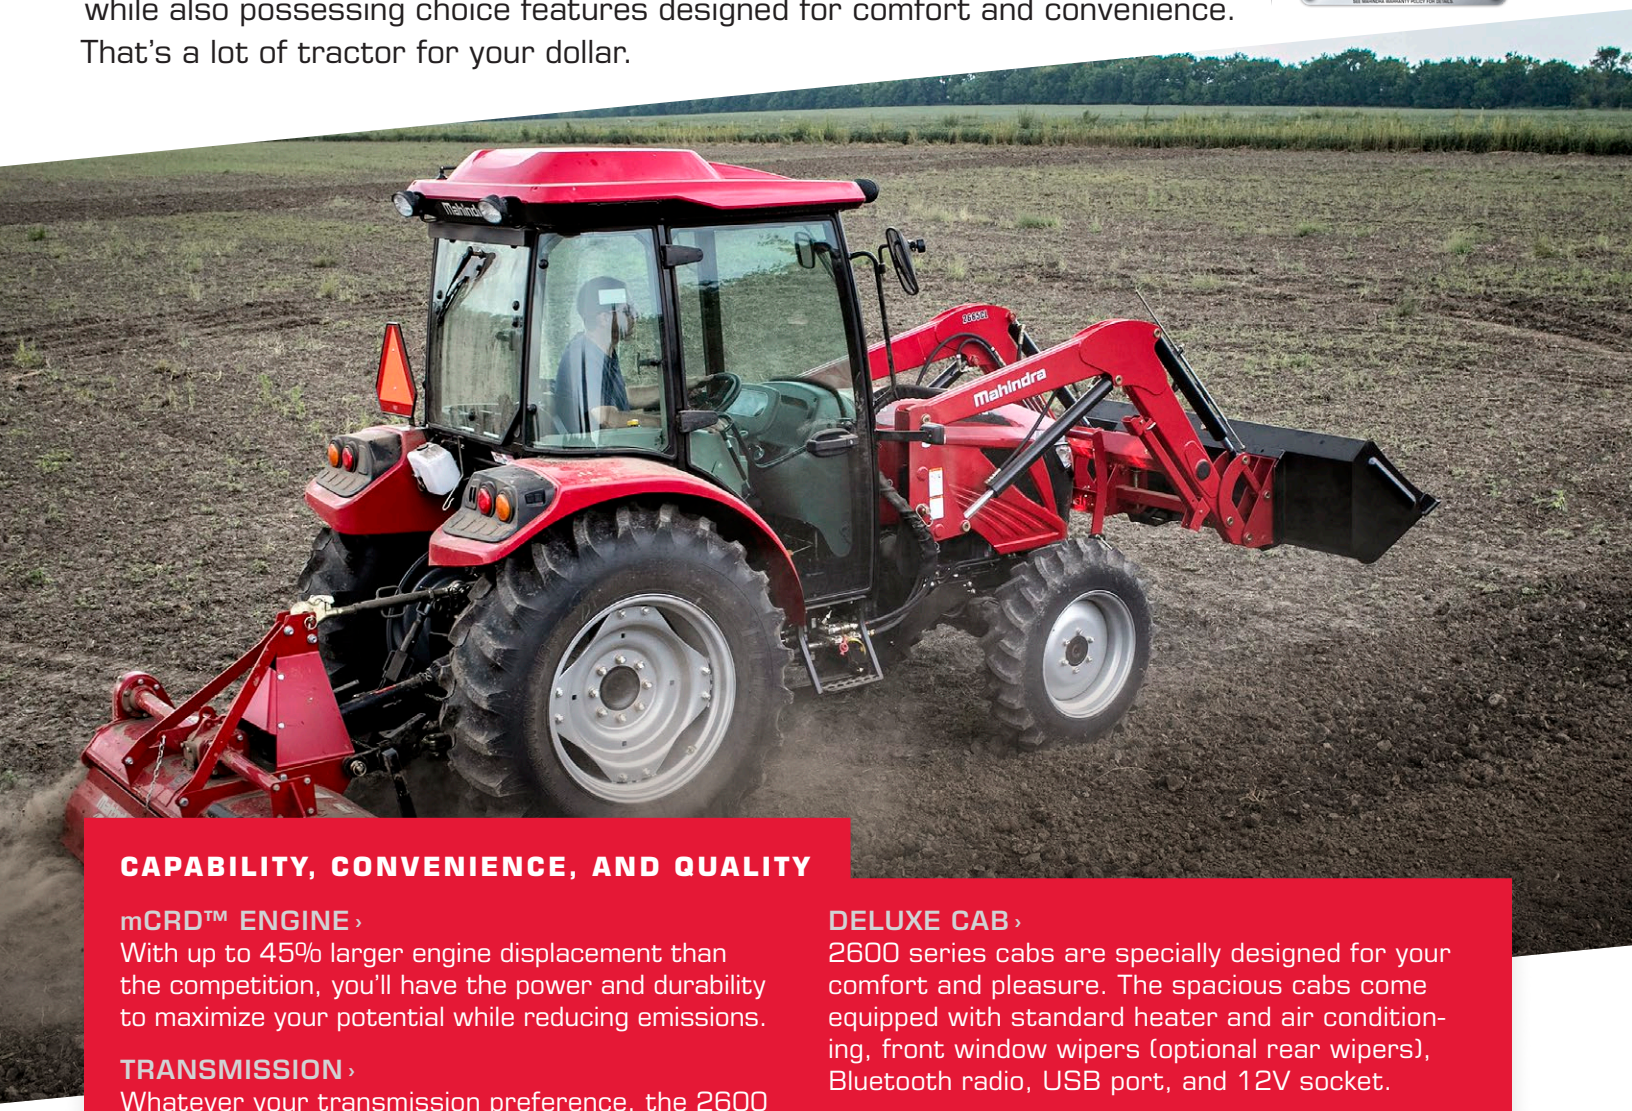

CAPABILITY, CONVENIENCE, AND QUALITY

mCRD™ ENGINE ›
With up to 45% larger engine displacement than the competition, you'll have the power and durability to maximize your potential while reducing emissions.

TRANSMISSION ›
Whatever your transmission preference, the 2600 series gives you what you want. Choose between either 12F/12R synch shuttle, power shuttle PST, or 3-range HST.

EASILY SERVICEABLE ›
Servicing your tractor has never been easier. Hood and side panels open quickly and efficiently with no tools required, providing ease of access for radiator, battery, filter replacement, and oil checks.

DELUXE CAB ›
2600 series cabs are specially designed for your comfort and pleasure. The spacious cabs come equipped with standard heater and air conditioning, front window wipers (optional rear wipers), Bluetooth radio, USB port, and 12V socket.

COMFORT ›
2600 series tractors contain the flattest operator station in its class, with a full rubber mat, allowing for easy entry and filtered vibration. The mComfort™ seat and flat-deck ergonomic operator platform also ensure complete ergonomic support.

https://truckmanualshub.com/

Ideal Uses: Specialty / Hobby Farming | Grounds Maintenance / Municipal | Hay Equine / Livestock / Dairy | Rural Lifestyle | Materials Handling | Home

KEY ADVANTAGES

2638 HST

LARGEST DISPLACEMENT ENGINE
2600 series tractors come equipped with the largest engine displacement in its class, allowing for lower operating RPM, longer life, quieter operations, more hauling capability, and better fuel economy.

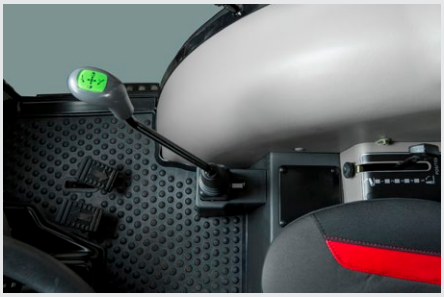

EASE OF ENTRY
These tractors possess the flattest operator station in its class, set with a full rubber mat. These features allow for easy entry into the vehicle's station, while also filtering rough vibration to help prevent operator fatigue.

CONVENIENCE ALL DAY LONG
All 2600 series tractors come equipped with fender mounted loader joystick controls, cup holder, 12V socket, and integrated cellphone holder with charger.

See Mahindra warranty and your dealer for more details.

Mahindra

https://truckmanualshub.com/

DELUXE CAB
An optional deluxe cab comes standard with heater and air conditioning, wide opening doors, front window wiper, Bluetooth radio, USB port, and a spacious, comfortable interior.

TRANSMISSION CHOICES
12 forward and reverse speeds with partial synchromesh (2645), power shuttle (2660 & 2670), or 3-range HST (2638 & 2660). Whatever your transmission preference, there is a 2600 series tractor for you.

WORK IN COMFORT
All 2600 series tractors come standard with Mahindra's own mComfort seat. Features include extra cushioning for operator relief, mechanical suspension seats, adjustable headrest, and foldable armrests.

2600 SERIES ATTACHMENTS

TRACTOR	2638 HST	2638 HST CAB	2645 SHUTTLE	2645 SHUTTLE CAB	2660 HST	2660 HST CAB	2660 PST	2660 PST CAB	2670 PST CAB
LOADER MODEL	**2638L**	**2638CL**	**2645L**	**2645CL**	**2660L**	**2660CL**	**2660L**	**2660CL**	**2670CL**
Standard Bucket Size [in]	66		66		72				78
Maximum Lift Height [in]	101.4		101.9		115.4				115.4
Dig Depth [in]	4.5		4.8		5.2				5.2
Lift Capacity to Full Height at Pivot Pin [lbs]	1634		2041		3122				3122
Breakout Force [lbs]	2696		3430		5225				5225
Shipping Weight [lbs]	985		1177		1270				1318
BACKHOE MODEL	**60B**				**65B**				
Standard Bucket Size [in]	16				18				
Maximum Dig Depth [in]	95				112				
Dig Depth 2' Flat Bottom [in]	93.5				110				
Dig Force Bucket [lbs]	3439				3895				
Dig Force Dipper [lbs]	2214				2358				
Shipping Weight [lbs]	1250				1100				

https://truckmanualshub.com/

2600 SERIES SPECIFICATIONS

TRACTOR	2638 HST	2638 HST CAB	2645 SHUTTLE	2645 SHUTTLE CAB	2660 HST	2660 HST CAB	2660 PST	2660 PST CAB	2670 PST CAB
ENGINE									
Type	Four-stroke, Naturally Aspirated, Direct Injection, Water Cooled Diesel Engine				Four-stroke, Turbocharged, Direct Injection, Water Cooled Diesel Engine				
Engine HP (kW) @ RPM	37.4 (27.5) @ 2400		44 (33) @ 2600		60 (44.5) @ 2300				70 (52) @ 2300
Displacement [in³ (cc)]	166.7 (2732)				161.7 (2650)				
Number of Cylinders	4				3				
Fuel Tank [gal (L)]	9 (34)				16 (60.6)				18.5 (70)
DRIVE TRAIN									
Transmission	HST - 3 Ranges		Sync, shuttle with part synchromesh		HST - 3 Ranges		Power Shuttle		
Number of Speeds	Infinite		12F / 12R		Infinite		12F / 12R		
Clutch	Damper		Dry, single plate		Damper		Dry Single Plate		
Brakes	Wet Disc Brake, Mechanical								
PTO									
Type	Independent								
Rear PTO RPM	540 @ 2400		540 @ 2650		540 @ 2300				
Mid PTO RPM	2000 @ 2500 (OPT)		N/A		2000 @ 2500 (OPT)		N/A		
PTO HP (kW)	31 (23.2)	29.5 (22)	36 (26.8)		46.3 (34.5)		48.5 (36.2)		53.8 (40.1)
HYDRAULICS									
Type	Open Center								
Implement Pump Output [gpm (L/min)]	7.6 (28.7)		8.2 (31.0)		11.8 (44.7)				
Maximum Total Flow [gpm (L/min)]	11.7 (44.3)		12.7 (48.1)		16.7 (63.2)				
Standard Rear Valve	N/A				1 Spool				
3-Point Hitch	CAT 1				CAT I with Telescoping Stabilizers & Flex Links				CAT II with Telescoping Stabilizers & Flex Links
Lift Capacity [lb (kg)]	2646 (1200)				3314 (1503)				3528 (1600)
ELECTRICAL									
Battery	12 V, 800 CCA				12 V, 925 CCA				
Alternator	12 V, 90 A								
DIMENSIONS									
Overall Length [in (mm)]	119.3 (3030)				138.8 (3525)				144.4 (3667)
Overall Width [in (mm)]	63.2 (1605)				71.1 (1805)				71.5 (1817)
Overall Height [in (mm)]	94.4 (2400)				102 (2590)				
Wheelbase [in (mm)]	67.7 (1719)				73.7 (1871)				83 (2100)
Minimum Ground Clearance [in (mm)]	14.5 (370)								15.7 (400)
Turning Radius [ft (m)]	N/A								
Weight [lb (kg)]	3130 (1420)	3351 (1520)	3285 (1490)	3506 (1590)	4145 (1884)	4585 (2080)	4145 (1884)	4585 (2080)	5390 (2445)
WHEELS & TIRES									
AG [Front/Rear]	7-16 6PR / 11.2-24 4PR		8.3 x 16 / 12.4 x 24		9.5x16 6PR / 14.9x24 6PR		9.5 x 20 / 14.9 x 28		
IND [Front/Rear]	10-16.5 / 43 x 16-20				12x16.5 6PR / 16.9x24 8PR		10.5/80 x 18 / 18.4 x 24		
TURF [Front/Rear]	N/A								LSW305-521 / LSW570-648