



ArmaTrac®




904e

- 12 forward, 12 reverse full synchromesh transmission with power shift...
- Forward / Reverse Shuttle...
- Plow depth adjustment with "Automatic Hitch Control" system...
- 4 hydraulic remote valves...
- Rotative type top hitch...
- High capacity electronic/hydraulic lift system...
- Independent and synchronized PTO shaft...
- Digital Air Condition System...
- 110 liter capacity fuel tank...
- Ergonomic luxury cab with Hi-Visibility for an unparalleled view, dust & sound proof...



**NEW
MODEL**

**Armed well for even the toughest job.
Anywhere on earth.**

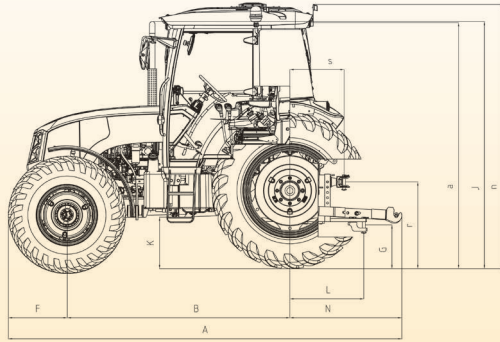

ENGINE

Emissions
Model
Maximum Power
PTO Power
Max Torque
Torque Reserve
Rated Speed
Number of Cylinders - Cubic Capacity
Rate of Compression
Aspiration
Air Filter
Bore x Stroke

CLUTCH

Type
Diameter
Lining

TRANSMISSION

Type
Gear Number
Gears Forward-Reverse
Shifting
Speed

PTO SHAFT

Type
Speed

HYDRAULICS

Type
Three Point Linkage
Control - Functions
Operating Pressure
Pump Capacity (lt/min)
Hydraulic Valves (Number)

OTHER

Drive System
Operating Space
Steering
Service Brake
Parking Brake
Front Axle 2WD
Front Axle 4WD
Rear Axle

STANDART BALLAST

Front Ballast
Rear Ballast (Each Wheel)

DIMENSIONS

A-Length
B-Wheelbase
C-Front Track Width
D-Rear Track Width
E-Width
F-Ground Clearence
G-Ground Clearence With Trailer
K-Distance From Muffer
L-Distance From Front to Front Axle Axis
M-Maximum Height
N-Distance From Lowerlink Ends to Rear Axle Axis
Standard Front Tyre
Standard Rear Tyre
Unballasted Tractor Weight
Total Tractor Weight

ROPS

Frame
Cabin

ARMATRAC 904e

Stage III-A (Tier 3)
PERKINS/1104-44TA T3055
92.5Hp (68 kW) @ 2200rpm
85% of Engine Power
393Nm @ 1400rpm
33.2%
2400
4,4 Liters/4
18,2:1
Intercooler and Turbocharger
Dry type with Pre Internal Filter (with indicator)
105 x 127 mm

Dry Type / Mechanical Control
11.5" (292mm)
Cerametalic

Carraro 506-Up
12 Forward + 12 Rear - (FxR)x(1x2x3)x4
Mechanical
1-2-3-4, Forward-Reverse, Fully Synchromeshes
1,5 - 35.2 @ 2400 rpm

Mechanical, Hand Lever Operated
540 - 540e

Mechanical With Draft
Compatibility with CAT 2
Mechanical Control, Position, Draft and Mixed
180
48.5 @ 2400 rpm
4 Valves, with Hand Lever Control

4WD
Cabin/Frame
Hydrostatic
Hydraulic Controlled Five Friction Disks with Oil Bath at Each Wheel (5x2)
Each Rear Wheel, Mechanically Controlled
-
Carraro
Carraro 506-Up

10x30 kg
3x50 kg

4210 mm
2330 mm
1500-1900 mm
1500-1900 mm
1990 mm
520 mm
510 mm
2580 mm
825 mm
2695 mm
960 mm
12,4x24
18,4x30
3440 kg
4040 kg

Yes
Yes

Erkunt Traktör Sanayii A.Ş.

Organize Sanayi Bölgesi Batı Hun Cad. No:2 Sincan 06935 Ankara - TR
P: +90 312 267 44 88 (Pbx) F: +90 312 267 44 91
info@armatrac.com - www.armatrac.com