

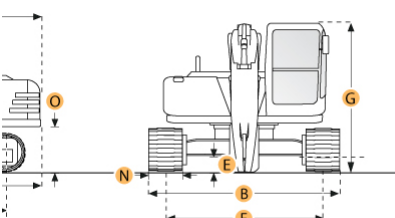


SUMITOMO SH330-3 HYDRAULIC EXCAVATOR

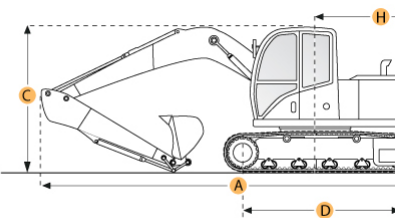

Boom/Stick Option (HEX) 1		
A. SHIPPING LENGTH OF UNIT	36.2 ft in	11040 mm
C. SHIPPING HEIGHT OF UNIT	10.8 ft in	3290 mm
I. MAX CUTTING HEIGHT	34 ft in	10370 mm
J. MAX LOADING HEIGHT	23.7 ft in	7230 mm
K. MAX REACH ALONG GROUND	36.6 ft in	11170 mm
L. MAX VERTICAL WALL DIGGING DEPTH	20.8 ft in	6350 mm
M. MAX DIGGING DEPTH	24.1 ft in	7340 mm
Dimensions		
B. WIDTH TO OUTSIDE OF TRACKS	10.5 ft in	3200 mm
D. LENGTH OF TRACK ON GROUND	12.2 ft in	3720 mm
E. GROUND CLEARANCE	1.6 ft in	480 mm
G. HEIGHT TO TOP OF CAB	10.8 ft in	3290 mm
H. TAIL SWING RADIUS	11.3 ft in	3450 mm
Undercarriage		
F. TRACK GAUGE	8.5 ft in	2600 mm
N. SHOE SIZE	23.6 in	600 mm

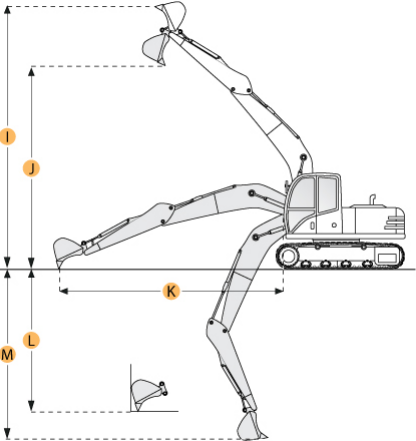

RITCHIE**Specs** **Everything about Equipment**

SUMITOMO SH330-3 HYDRAULIC EXCAVATOR

Specification

Engine		
MAKE	Isuzu	
MODEL	AA-6HK1X	
NET POWER	250 hp	186.4 kw
POWER MEASURED @	2000 rpm	
DISPLACEMENT	475.4 cu in	7.8 L
Operational		
OPERATING WEIGHT	72752.6 lb	33000 kg
FUEL CAPACITY	153.2 gal	580 L
HYDRAULIC SYSTEM FLUID CAPACITY	92.5 gal	350 L
HYDRAULIC SYSTEM RELIEF VALVE PRESSURE	4974.8 psi	34300 kPa
Swing Mechanism		
SWING SPEED	9.6 rpm	
Undercarriage		
SHOE SIZE	23.6 in	600 mm
GROUND PRESSURE	9.7 psi	67 kPa
MAX TRAVEL SPEED	3.4 mph	5.5 km/h
TRACK GAUGE	8.5 ft in	2600 mm
Buckets		
REFERENCE BUCKET CAPACITY	1.8 yd3	1.4 m3
Boom/Stick Option (HEX) 1		
SHIPPING HEIGHT OF UNIT	10.8 ft in	3290 mm
SHIPPING LENGTH OF UNIT	36.2 ft in	11040 mm
MAX DIGGING DEPTH	24.1 ft in	7340 mm
MAX REACH ALONG GROUND	36.6 ft in	11170 mm
MAX CUTTING HEIGHT	34 ft in	10370 mm
MAX LOADING HEIGHT	23.7 ft in	7230 mm
MAX VERTICAL WALL DIGGING DEPTH	20.8 ft in	6350 mm
Dimensions		
WIDTH TO OUTSIDE OF TRACKS	10.5 ft in	3200 mm
HEIGHT TO TOP OF CAB	10.8 ft in	3290 mm
GROUND CLEARANCE	1.6 ft in	480 mm
TAIL SWING RADIUS	11.3 ft in	3450 mm
LENGTH OF TRACK ON GROUND	12.2 ft in	3720 mm