

CASTLOADERS


800 ECO



https://truckmanualshub.com/

800 ECO

DIMENSIONS AND LOADING DIAGRAMS

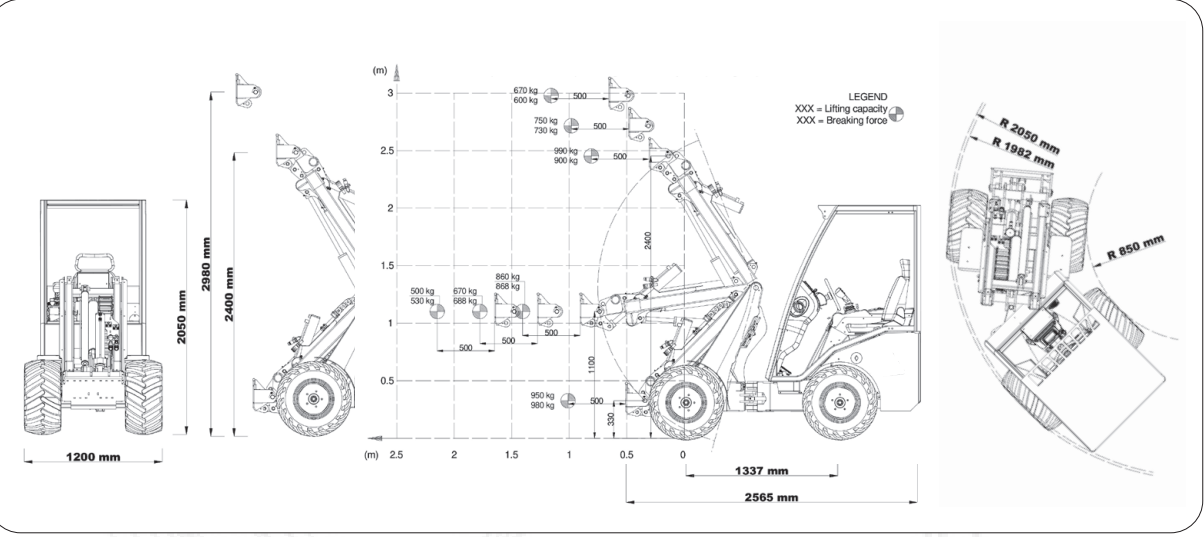

WHEELS

SKID	ALL TRAC	TRACTOR	TURF
23X8.50-12 23X10.50-12 26X12.00-12	8PR 300/60X12	23X8.50-12 23X10.50-12 26X12.00-12	23X8.50-12 23X10.50-12 24X13.00-12 26X12.00-12 26.5X14.00-12

FEATURES

LIFTING CAPACITY	ELECTRIC ENGINE	POWER	SPEED	HYDRAULIC SYSTEM	BOOM HEIGHT
950 Kg	2 Permanent magnets 48 Volt / 210 Ah	15 Kw	12 Km/h @ 26X12.00-12	25 l/min	2980 mm



CASTGROUP
WWW.CASTLOADERS.IT

CAST GROUP SRL
Via A. Meucci,18 I-30035 MIRANO VE
ph. +39041 5701827 fx +39041 5726786
info@cast-group.it

LEAF 800 ECO ENG 05/2022_A0000000016

Data contained in this document is subject to change without notice and/or notification. Cast Group reserves the right to modify its products without obligation to communications. The images in this document are the only a demonstrative purpose.



HYDROSTATIC FULL ELECTRIC LOADER • ECO FRIENDLY • ZERO EMISSION • ENERGY SAVING • TELESCOPIC

CASTLOADERS
MADE IN ITALY



800 ECO

Technology and innovation enclosed in an extremely versatile machine with extraordinary maneuverability and respectable load capacity. The generous electric engine with two permanent magnets is very quiet and the battery offers an autonomy of up to 4 / 4.5 hours depending on the intensity of use. The 14- function Joystick is standard.



Features that make the difference.

Lifting capacity 950 Kg
Engine power 15 Kw
Hydraulic system 25 l / min
Telescopic boom height 2980 mm
Selflevelling system
Electric differential lock
14- functions Joystick

Cast 800 ECO is available with an electrolyte traction battery.
Features: 48 Volt / 210 Ah, excellent autonomy even in intense work conditions, low weight and extended life cycle. The average charging times are about 6/8 hours with a low battery.
Cast 800 ECO is also available with a fast-charging lithium battery.

For optimal life cycle, it is recommended to recharge the battery when it is completely discharged.

STEER ADJ

Tilt adjustment of the steering column.

ERGONOMIC SEAT

Ergonomic and adjustable seat with safety belt and armrests.

TELESCOPIC

Telescopic boom equipped of selflevelling system with maximum height up to 2980 mm.



SILENT BLOCK

800 ECO

It is equipped as standard with a device that allows greater driving comfort: the Silent Block. This device has been designed to cushion shocks and jerks while driving, especially in rough terrain situations, improving grip and stability.



Agriculture
Breeding
Green maintenance
Building
Road maintenance



Variable flow: a condition of greater power with minimal effort.

The hydraulic pump is equipped with a variable set-up that allows to exploit the power used in an optimal way by limiting the effort with an increase in performance when the machine is put to the test.
The reduction in consumption is guaranteed and at the same time also the wear of the engine and transmission organs are minor with resulting benefit for the life of the machine.

Variable flow hydraulic pump.

- Less effort
- Less wear
- Lower consumption