


CASTLOADERS



LOADING DIAGRAMS

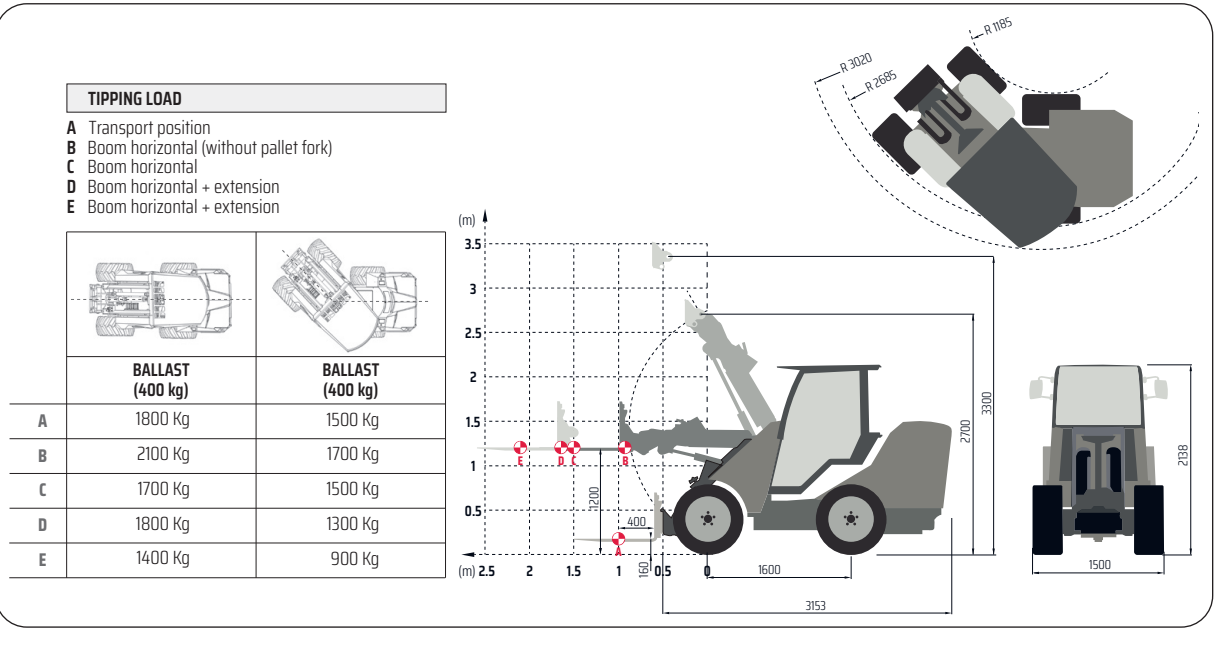

PL-MAXO_EN_12/2022 - A0000000053


Data contained in this document is subject to change without notice and/or notification.
Cast Group reserves the right to modify its products without obligation to communications.
The images in this document are only a demonstrative purpose.

WHEELS

SKID 26x12.00-12 31x15.50-15		ALL-TRAC 10PR 31x15.50-15 33x15.50-15		TRACTOR 26x12.00-12 33x15.50-15		TURF 26x12.00-12 31x15.50-15	
---	---	---	---	--	---	---	---

* with counterweights

☐ CAST MAXO 57 HP Single/Dual	2100 kg [B]*	57 HP @ 2600 rpm	80 l/min	3300 mm
--	--------------	------------------	----------	---------

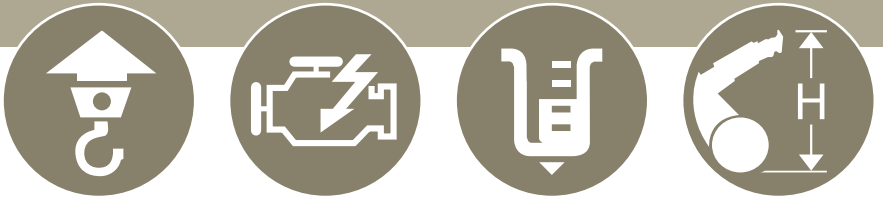

CASTGROUP

CAST GROUP S.r.l.
Via A. Meucci, 18 30035 Mirano VE Italia
ph.+39 041 5701827- fax +39 041 5726786
info@cast-group.it | www.cast-group.it



MAXO

- ☐ CAST MAXO 57HP SINGLE SPEED
- ☐ CAST MAXO 57HP DUAL SPEED

CASTLOADERS.IT



MAXO



All controls are close at hand.
Electronic display with total system check.
The ergonomic 11-function joystick is available as an option.

All Black,
aggressive
and seductive.



<https://truckmanualshub.com/>



Covered air conditioning system
in shockproof material
and integrated into the bodywork.



Built-in rear hydraulic outlets for
better protection from accidental
impacts.



11-functions Joystick is standard.
Ergonomic 11-functions and
15-functions are optional.
An optimal control for
all commands.



Telescopic boom, height
up to 3300 mm, among
the most high in its category.



18 Km/h for Single Speed model
10-30 Km/h for Dual Speed model.



Electronic display.



Cast Maxo represents today the top model of our production. It is produced in two versions with a 57HP liquid cooled Kohler Stage V diesel engine and can be configured with single or double speed Poclain wheel motors. A very powerful and robust machine, suitable for multiple applications, especially in agriculture and construction. All models can be supplied with heated cab and air conditioning system. The 11-function Joystick is standard and available in an ergonomic version or 15-function as option. Double cylinder selflevelling, integrated 185 Kg counterweights and electric differential lock are standard.

Maxo Single/Dual Technical data

☐ Engine data (Standard)

Manufacturer:	Kohler	✓	✓
Diesel engine type:	KDI 1903TCR	Diesel	Diesel
Cylinders	3	3	3
kW	42	42	42
Displacement cc	1642	1642	1642
Cooling system:	Water	✓	✓
Emissions standard level	Stage V	Stage V	Stage V
RPM	2600	2600	2600

☐ Electrical system

Operating voltage:	12 V	✓	✓
Alternator:	80 A	✓	✓

☐ Weights

Weight (standard) kg	2300	2350
Lifting capacity kg [B]*	2500	2500
Max Pull force kg	1100	1500
Breakout force kg*	2200	2200

☐ Vehicle data

Joystick (function)	11	11
Cab (optional)	✓	✓
Electric differential lock	✓	✓
Rops/Fops protection	✓	✓
Telescopic boom	✓	✓
Selflevelling	✓	✓
Max speed km/h	18	10-30
Anti Skid	✓	✓
Hydraulic oil tank capacity: 73 l	✓	✓

☐ Drive

Type of drive: Direct Drive 4WD Hydrostatic transmission	✓	✓
Traction drive	✓	✓

☐ Noise values

Average sound power level: LwA 99 dB(A)	✓	✓
Guaranteed sound power level: LwA 101 dB(A)	✓	✓

☐ Wheels

Tractor	31x15.50-15	31x15.50-15
---------	-------------	-------------

* with counterweights

