







HIGH SPEED, (TRUCK) NON-DRIVE STEER AXLE, FSND08S

GAWR	8 000 kg [17,500 Lb.]
Axle Type	Forged Beam
Brakes	
Type	Drum, S-Cam
Size	Ø410 mm [16,1 Inch] x 180 mm [7,1 Inch]
Slack Adjuster	Automatic, 165 mm [6.5 Inch] Length
Chamber	30 Square Inch
Steering	
KPI	7°
Caster	0°
Camber	1°
Turn angle	50°
Housing	Forged I-Beam, Drop 112 mm [4.4 Inch]
Wheel End	10-studs on 335 mm [13,2 Inch] BC, 280.8 mm [11,1 Inch] Pilot Diameter. Minimum Wheel Size 20 Inch
Wheel offset (optimal)	Inset 120...160 mm [4.7...6.3 Inch]
Tracks Available (Over wheel mounting faces)	2400 mm [94.5 Inch]
Lubrication	
Type	Lithium Based Multi Purpose Grease According to NLGI 2
Weight-Dry	440 kg [970 Lb.]

All ratings are nominal. Actual capacities determined based upon review of application data by Sisu Axles Inc.

OPTIONS:	Hole Patterns	Wheel Stud Length
	Wheel Nuts	Brake Chambers
	ABS Provision	Steering Arm Configurations
	Top Coating	Slack Adjuster Types

Other options may be available. Contact Sisu Axles sales for more information.

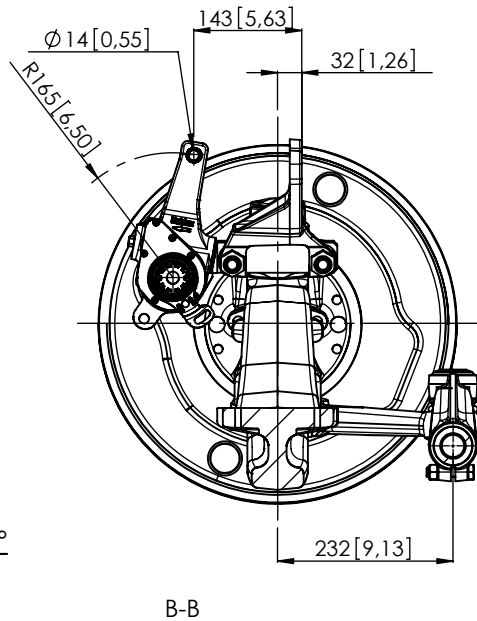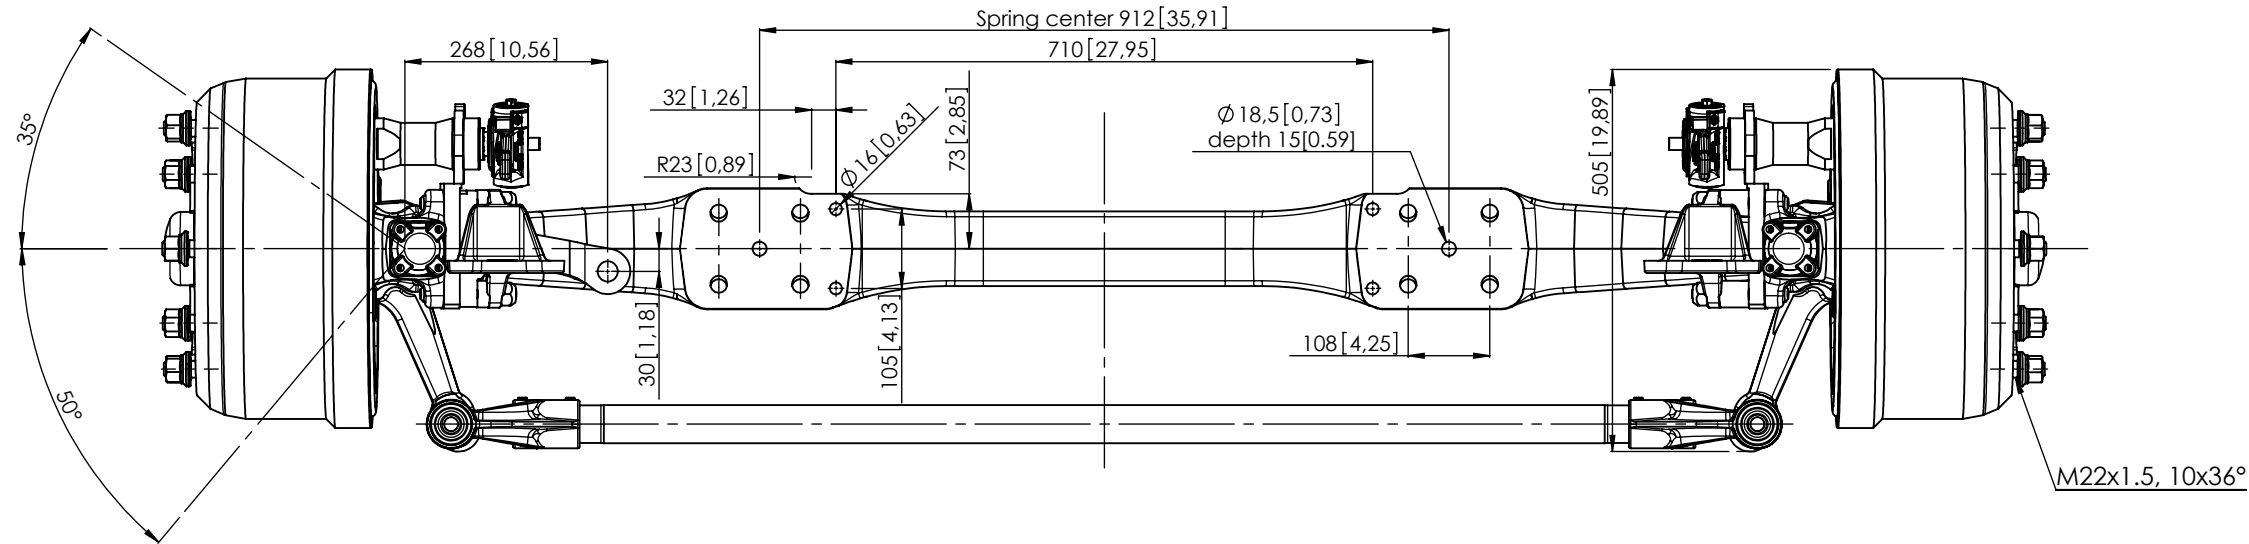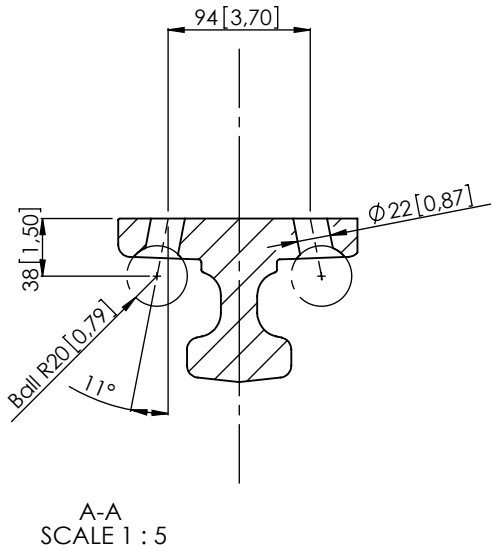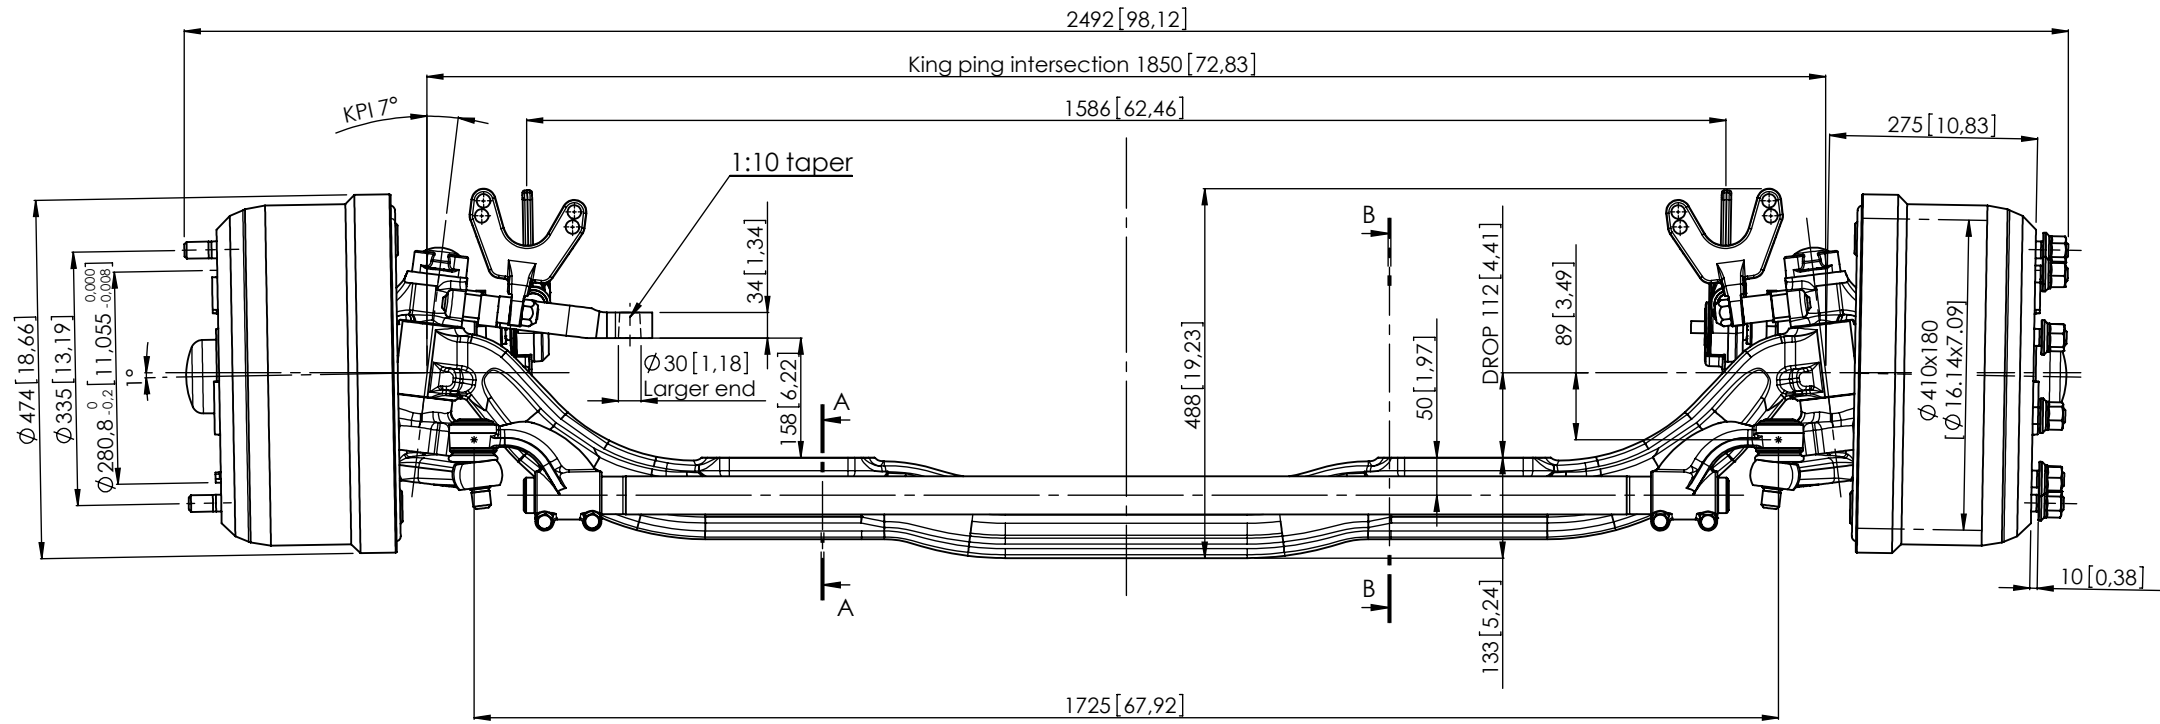

SISU AXLES THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO SISU AXLES INC. IT SHALL NOT BE REPRODUCED, COPIED OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OF FOR OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF SISU AXLES INC.						Scale 1:10 DO NOT SCALE DRAWING		Material				Product FSND08S							
						Drawn JALI		Date 28.05.2007		Approved		Date		Weight kg					
						Dimensions mm		Title Dimension drawing											
								Steering				Non-drive Drawing n:o M540-029-0018		Rev. B		Sheet 1/1		Drawing size A3	
																			
B	Axle beam updated					MIMU	23.02.2012	NIAH	24.02.2012										
REV.	DESCRIPTION					CHANGED	CHANGED DATE	APPROVED	APPROVED DATE										