




START / STOP GUIDE

If you have just received your Agrison Diesel Generator and would like to know how to initially start it and stop it, you will find this guide of assistance.

HOW TO START:

Step 1: Firstly, conduct an overall nut and bolt check tightening as required (using a spanner) as vibration in transit can occur.

Step 2: Fill the fuel tank with diesel

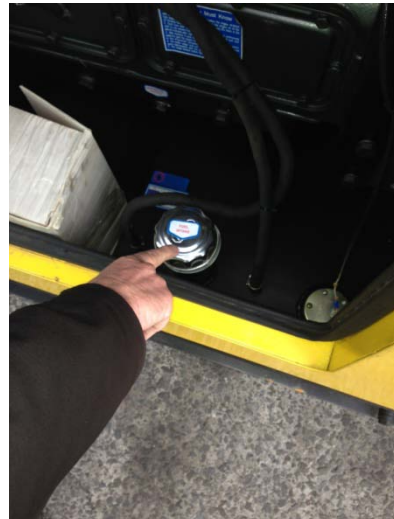

Step 3: Ensure the fuel lines are tight (using a screw driver)



Step 4: Undo the Bleeder by using a 10mm spanner (3 turns should be sufficient)



Step 5: Prime the machine - you can do this by pushing down on the black button approx 8-10 times with your thumb.



Step 6: Ensure that the Emergency Stop Button is in the OUT position.



Step 7: Turn the Key ON to the Right side. You will notice the screen will light up.



Step 8: Press the HAND button



Step 9: Press the Green Start Button



Step 10: Your machine will start running, however you will need to Prime it again, as per Step 5.

Step 11: Go back to Step 4 and tighten up the Bleeder with 10mm Spanner.

THIS MUST BE DONE TO ENSURE NO FUEL GETS OUT OF THE BLEEDER



****Handy Tip: By pressing the UP or DOWN ARROW on the Smart Gen panel, you will have access to many readings regarding the generator features, for example; running hours, how many starts, how many amps etc***



HOW TO STOP:

Step 1: Press the Emergency Stop Button In



Step 2: Wait until the engine has fully stopped.

Step 3: Turn the Key into OFF position.



Note: Do not turn the key into off position before pressing the emergency stop button!

You may also watch the video on Youtube by typing in "Agrison" in the search bar.



For more information on the use of the generator please refer to the GFS Instruction Manual and the Smart Gen Operation Manual which is also downloadable from www.agrison.com.au. We hope this guide has been of assistance to you. If you have any feedback regarding this guide please email us at contact@agrison.com.au

Agrison Pty Ltd | 2098 Hume Highway Campbellfield VIC 3061 | PO BOX 352 Somerton 3062
| P: 1300 651 830 F: 1300 854 830 | www.agrison.com.au

*This document has been prepared as a guide only. Agrison reserves the right to update the manual and specifications without prior notice.