
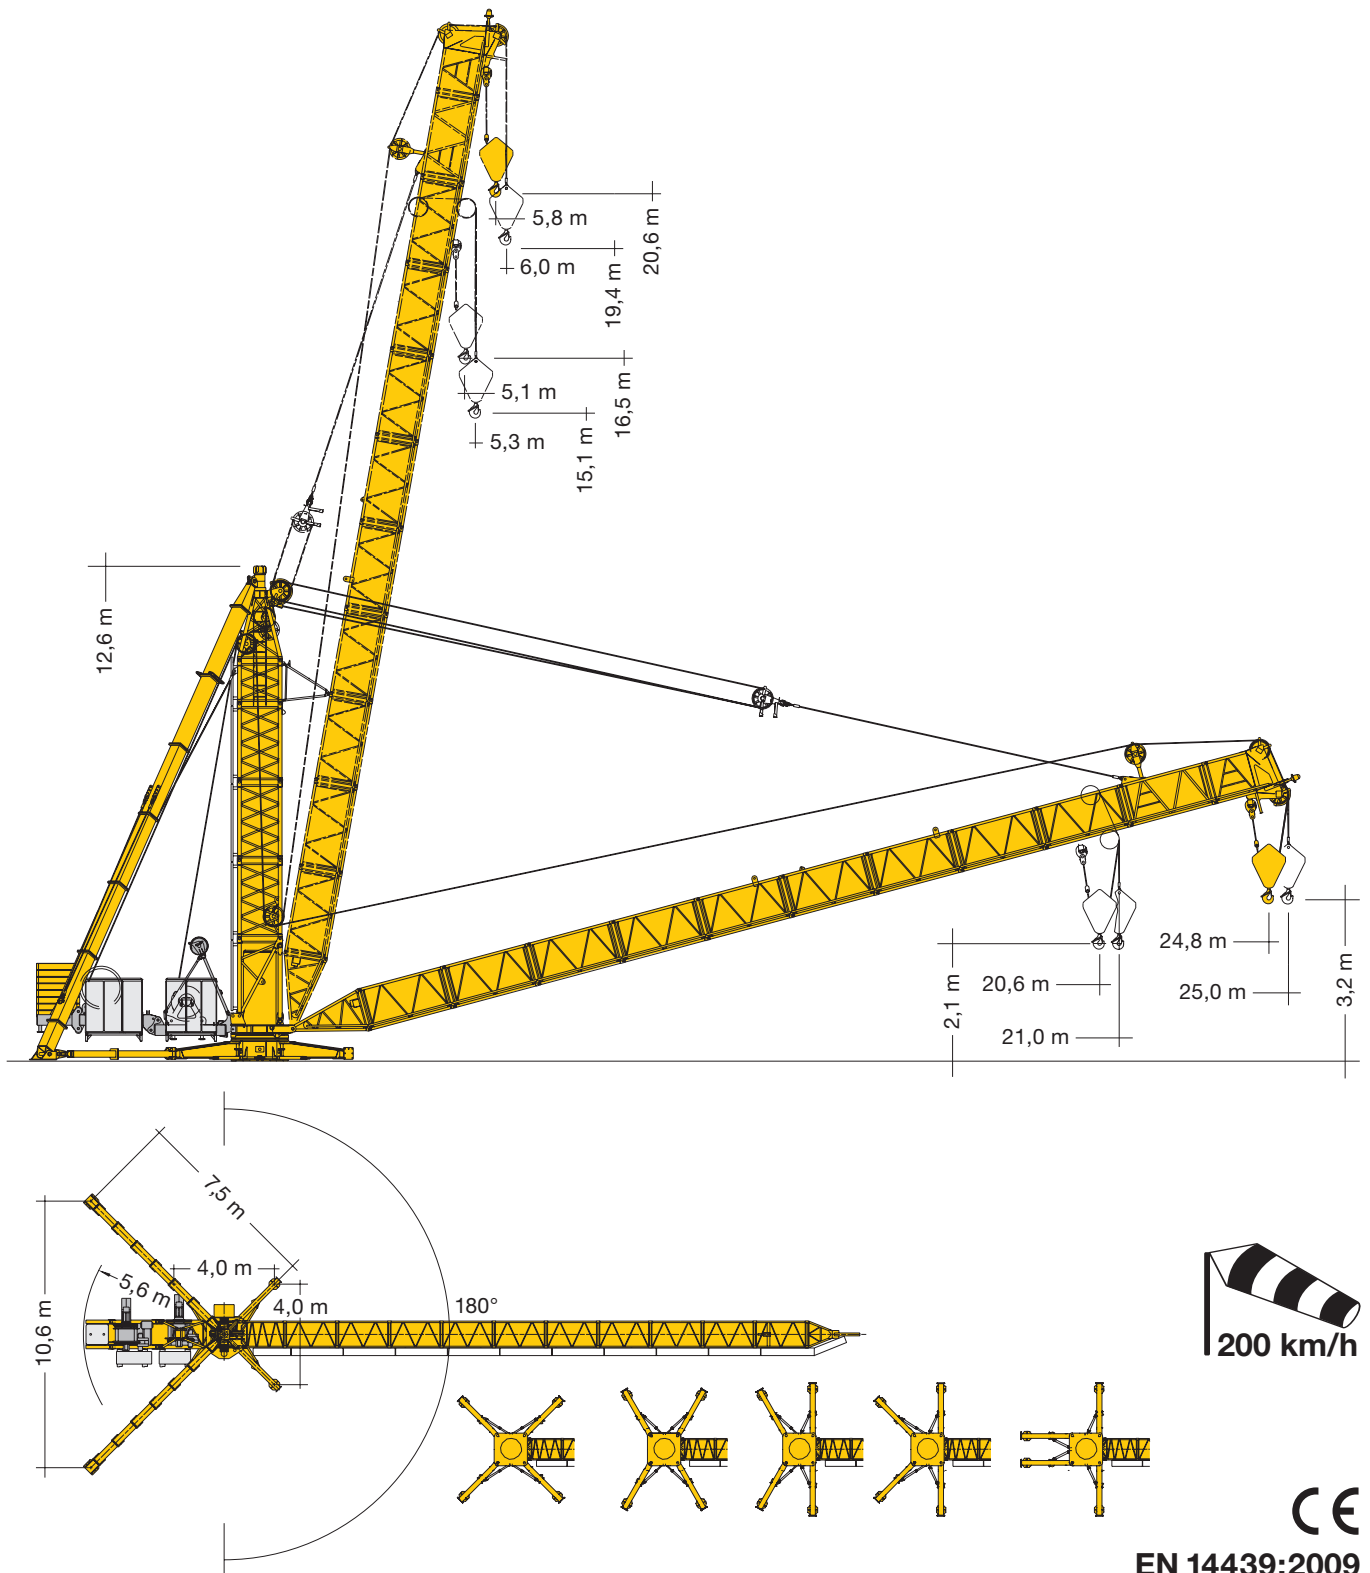



Derrick 200 DR 5/10 Litronic®



LIEBHERR

		mit Stiff-Legs / with 'stiff legs' / avec «stiff-legs» / con Stiff-Legs con stiff-legs / com tirante rígido / с выносными опорами													
m		m/kg	11,0	12,0	13,0	14,0	15,0	16,0	17,0	18,0	19,0	21,0	22,0	23,0	25,0
25,0		6,0 – 25,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
25,0		5,8 – 19,0 10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	8980	8550	8150	24,8 m 7500
21,0		5,3 – 21,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000			
21,0		5,1 – 20,6 10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	20,6 m 10000			

		ohne Stiff-Legs / without 'stiff legs' / sans «stiff-legs» / senza Stiff-Legs sin stiff-legs / sem tirante rígido / без выносных опор													
m		m/kg	11,0	12,0	13,0	14,0	15,0	16,0	17,0	18,0	19,0	21,0	22,0	23,0	25,0
25,0		6,0 – 20,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	4700	4480	4250	3800
25,0		5,8 – 10,9 10000	9890	8830	7960	7220	6600	6060	5590	5180	4810	4190	3920		24,8 m 3300
21,0		5,3 – 21,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000			
21,0		5,1 – 11,1 10000	10000	9050	8190	7450	6820	6280	5810	5390	5020	20,6 m 4500			


Zug-/Druckkräfte an den Verankerungspunkten auf Anfrage. / Tension/compression forces at anchoring points on request. / Forces de traction/compression aux points d'ancrage sur demande. / Sforzi di trazione e pressione sui punti di ancoraggio, su richiesta. / Fuerzas de tracción y compresión sobre los puntos de anclaje, consulta previa. / Forças de tração e compressão nos pontos de ancoragem, mediante consulta. / Усилия растяжения/сжатия в точках крепления - по запросу.

*** Tragfähigkeit für höhere Hubhöhen auf Anfrage.** / Lifting capacity for higher hoisting heights on request. / Capacité de levage pour des hauteurs de levage plus hautes sur demande. / Portata per elevate altezze gancio su richiesta. / Consultar cargas máximas para alturas bajo gancho superiores. / Capacidade de carga para maiores alturas sob consulta. / Грузоподъемность для большой высоты подъема по запросу.


Antriebe


Driving units / Mécanismes d'entraînement / Meccanismi / Mecanismos / Mecanismos / Приводы

	U/min 0 ↔ 0,8 sl./min tr./min	1 x 5,0 kW FU
	1,3 min.	37 kW FU

	45 kW FU
	37 kW FU

kVA 72,0

		↔ stufenlos / stepless / régl. continu / régl. progressiva / sin escalones sem degraus / Бесступенчатый		kg		m/min	
45 kW FU WIW 260 MZ 407		max. 633 m					
		10 Lagen Layers / Couches Strati / Camadas Capas / Слоёв		1 4900 200		1 10000 1000	
				0 ↔ 44 0 ↔ 172		0 ↔ 22 0 ↔ 100	

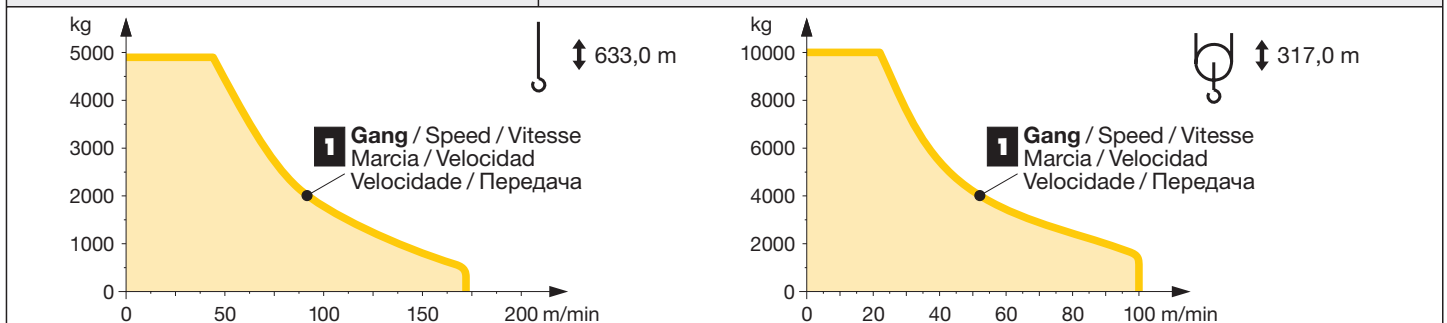

Konstruktionsänderungen vorbehalten! / Subject to alterations!
Sous réserves de modifications! / Si fa riserva di modifiche!
¡Sujeto a modificaciones! / Salvo modificação da construção!
Права на внесение конструкторских изменений сохраняются!

Sämtliche Angaben erfolgen ohne Gewähr. / This information is supplied without liability. / Ces renseignements sont sans garantie. / Le indicazioni contenute si intendono salvo errori ed omissioni. Declinamos toda responsabilidad derivada de la información proporcionada. / Declinamos qualquer responsabilidade quanto à informação fornecida. / Все данные указаны без обязательств.